

40
YEARS

STREAMLIGHT®
Anniversary 1973-2013



40 YEARS OF BUILDING THE WORLD'S FINEST LIGHTING TOOLS

FOR THE PAST 40 YEARS INNOVATION HAS BEEN OUR MISSION...

1973 Streamlight founded by engineers who created solar simulators for NASA.



1980 LiteBox® Lantern invented by Streamlight.



1989 Streamlight introduces the Survivor® line, still the world's #1 right-angle rechargeable flashlight.



1980s Streamlight introduces the SL-20® line, one of the most legendary duty-lights ever created.



1993 We unleash the iconic Stinger®, the industry's first, category-defining, compact rechargeable flashlight.



2004 We introduce Strion®, the world's first ultra-compact rechargeable flashlights. At just 4.6 oz., it shines as bright as lights 5x its size.



1998-1999 Vulcan® Stylus® and ProPolymer® series debut.



2006 Streamlight introduces our first aluminum gun-mounted lights, TLR-1® and TLR-2® LED versions of the Stinger® and Survivor® are created.



2000 Streamlight builds state-of-the-art manufacturing facility/corporate headquarters in Eagleville, PA.




2003 Streamlight puts LED and xenon lights together in patented Twin-Task® series. New Tactical line premieres featuring Super High Flux LEDs. Fire Vulcan® aids fire-fighter safety as the first lantern with LED tail lights.



2007 Dual-switch Stinger DS® LED debuts. Streamlight creates a true million candela peak beam intensity lantern – the HID LiteBox®, with a beam that reaches 1.5 miles. The Sidewinder® debuts as the most versatile military light, with multiple function LEDs and multiple brightness levels for each.



2010 The rechargeable Knucklehead® debuts, this versatile work light features a hangable LED flood light with a 360° rotating head. The PolyStinger® LED Haz-Lo,® our first intrinsically safe, Class I, Div. 1 rechargeable Stinger® is also introduced. Streamlight continues its support of our nation's troops with an expanded line of IR/white light illumination tools with the TLR-VIR.®



2011 The pistol-grip Waypoint® is introduced, becoming our brightest non-rechargeable hand-held light. Also introduced is a new line of compact, high performance, lithium battery-powered, 200 lumen tactical lights called the "X" series: Super Tac® X, Scorpion® X, TL-2® X and Nightfighter® X.



2013 Streamlight introduces a family of HL (High Lumen) lights and creates the most complete line of illumination tools for all jobs and applications.



2009 Strion® LED is introduced, our first lithium ion rechargeable LED and gun-mountable tactical light. The PolyStinger® LED becomes our first rechargeable LED with a virtually indestructible nylon polymer body. The super-small Sidewinder Compact® debuts, weighing just 2.4 oz.



2008 C4® LED technology introduced. Streamlight expands headquarters and manufacturing facilities with 75,000 square foot addition.

THE INNOVATION CONTINUES...



STREAMLIGHT
Anniversary 1973-2013

LEADING THE INDUSTRY

WITH THE GREATEST VARIETY OF PROFESSIONAL GRADE LIGHTS:



STINGER LED HL® pg. 10 STINGER DS LED HL® pg. 10 STINGER® LED HP pg. 11 STINGER DS® LED HP pg. 11 STINGER® LED pg. 11 STINGER DS® LED pg. 11 POLYSTINGER® LED HAZ-LO® pg. 12 POLYSTINGER DS® LED pg. 13



E-FLOOD® LITEBOX® HL™ pg. 22 E-FLOOD® LITEBOX® pg. 23 E-SPOT® LITEBOX® pg. 23 FIRE VULCAN® LED pg. 24 HID LITEBOX® pg. 25



2AA PROPOLYMER® LED pg. 38 3N PROPOLYMER® LED pg. 39 3AA PROPOLYMER® HAZ-LO® pg. 39 4AA PROPOLYMER® LED pg. 40 4AA PROPOLYMER® LUX pg. 40 4AA PROPOLYMAX® pg. 41 3C PROPOLYMER® LED pg. 42 3C PROPOLYMER® HAZ-LO® pg. 43



SUPER TAC® X pg. 54 TL-2® X pg. 54 NIGHTFIGHTER® X pg. 55 SCORPION® HL pg. 55 SCORPION® X pg. 55 POLYTAC® pg. 56 POLYTAC® HP pg. 56 POLYTAC 90® pg. 57 PROTAC HL® 3 pg. 58



SEWINDER® MILITARY pg. 65 BUCKMASTERS® PACKMATE® pg. 66 BUCKMASTERS® TWIN-TASK® 2L pg. 66 BUCKMASTERS® CAMO TRIDENT® pg. 67 BUCKMASTERS® STYLUS PRO® CAMO pg. 67 CAMO ENDURO® pg. 68 THE SIEGE® pg. 71



SEPTOR® pg. 78 ARGO® pg. 78 TRIDENT® pg. 79 GREEN TRIDENT® pg. 79 3AA HAZ-LO® pg. 81 ENDURO® pg. 82 BUCKMASTERS® CAMO TRIDENT® pg. 82



NIGHT COM® pg. 88 NIGHT COM® UV pg. 88 MULTI OPS® pg. 88 STREAMLIGHT JR.® LED pg. 89 STREAMLIGHT JR.® REACH LED pg. 89

STREAMLIGHT

PERFORMANCE. PERIOD.



POLYSTINGER® LED
pg. 13



STINGER® LITE PIPE
pg. 14



STINGER® CLASSIC LED
pg. 15



STRION LED HL®
pg. 16



STRION® LED HP
pg. 17



STRION® LED
pg. 17



SL-20L®
pg. 18



SL-20LP®
pg. 19



WAYPOINT®
pg. 26



WAYPOINT® RECHARGEABLE
pg. 27



// NEW
PORTABLE SCENE LIGHT
pg. 29



SURVIVOR® LED
pg. 32



VANTAGE®
pg. 33



POLYTAC 90®
pg. 33



KNUCKLEHEAD® FLOOD
pg. 34



KNUCKLEHEAD® SPOT
pg. 35



TLR-1 HL/
TLR-2 HL®
pg. 46



TLR-1 HP/
TLR-1s HP®
pg. 47



TLR-1/
TLR-1s®
pg. 48



TLR-2/
TLR-2s®
pg. 48



TLR-VIR®
pg. 50



// NEW
TLR-2® IRW
pg. 51



TLR-3®
pg. 51



TLR-4®
pg. 51



// NEW
TLR-1® GAME SPOTTER®
pg. 52



// NEW
TLR-4® G
pg. 53



// NEW
TLR-2® G
pg. 53



PROTAC HL®
pg. 59



PROTAC HL® HEADLAMP
pg. 59



PROTAC® 1L
pg. 60



PROTAC® 2L
pg. 60



PROTAC® 1AA
pg. 60



PROTAC® 2AA
pg. 60



PROTAC® 2AAA
pg. 61



PROTAC® EMS
pg. 61



SIDEWINDER COMPACT® II MILITARY
pg. 63



SIDEWINDER COMPACT® MILITARY
pg. 64



STYLUS PRO REACH®
pg. 72



MICROSTREAM®
pg. 72



// NEW
STYLUS PRO® USB
pg. 73



STYLUS PRO®
pg. 73



STYLUS®
pg. 74



STYLUS® UV
pg. 74



STYLUS REACH®
pg. 75



STYLUS REACH® 18
pg. 75



SIDEWINDER COMPACT® SPORTSMAN
pg. 83



TWIN-TASK® 3C LED
pg. 84



TWIN-TASK® 3C-UV LED
pg. 84



TWIN-TASK® 3AA LED
pg. 85



TWIN-TASK® 3AAA-LASER LED
pg. 85



TWIN-TASK® 1L LED
pg. 87



TWIN-TASK® 2L LED
pg. 87



TASK-LIGHT® 3AA LED
pg. 86



// NEW
CLIPMATE® USB
pg. 90



THE LOGO™
pg. 90



KEY-MATE®
pg. 90



NANO LIGHT®
pg. 91



STREAMLIGHT

Heroes Trust Streamlight®

DIFFERENT KINDS OF BEAMS FOR DIFFERENT KINDS OF TASKS.

STREAMLIGHT BUILDS PERFORMANCE. PERIOD.

With three kinds of beams, Streamlight has made it possible to choose a light that really fits the job at hand. Whether you need to see what's way up ahead, what's all around you, or if you just need a great, dependable, multi-purpose light, Streamlight has exactly what you need.

TRADITION SERIES

THE TRADITION SERIES This family of flashlights delivers the optimal balance of a bright, far-reaching beam, ample peripheral light, and long run times. When you're out in the field or on any job that requires light for long periods, these are the flashlights you want by your side. Their brightness, power, performance, cost, and extended run times make them perfect for a variety of everyday tasks. They're Streamlight's most popular lights; now with enhanced performance.

PERFORMANCE CHARACTERISTICS

- Optimal balance of candela and lumens
- Longest regulated run times
- The best value

TYPICAL USES

- Law enforcement duty light
- Day-to-day industrial use
- General contractor use

HP SERIES

THE HP SERIES These High Performance flashlights throw light a long distance. They're great for illuminating the entire length of a dark alley, for inspecting utility lines from the ground, and for any task that requires a far-reaching beam.

PERFORMANCE CHARACTERISTICS

- High-candela beam
- Delivers long-range lighting
- Sheds a bright peripheral beam

TYPICAL USES

- See all the way to the end of a dark alley
- Inspecting utility lines from the ground
- Search and Rescue missions and down range illumination

HL SERIES


THE HL SERIES These High Lumen flashlights (500 - 1,100+ lumens) have a wide, side-to-side beam. Our HL Series lights illuminate an entire area, including what may be hiding in the sides and corners. They perform like floodlights, illuminating a whole room, vehicle, or any area with bright, revealing light.

PERFORMANCE CHARACTERISTICS


- High-lumen beam
- Delivers maximum illumination
- Provides a good level of candela

TYPICAL USES


- Clearing a dark scene or searching an alley
- Vehicle stops or searches
- Wherever you want wide scene illumination



**STREAMLIGHT
TRADITION LED
BEAM PATTERN**



**STREAMLIGHT
HP LED
BEAM PATTERN**

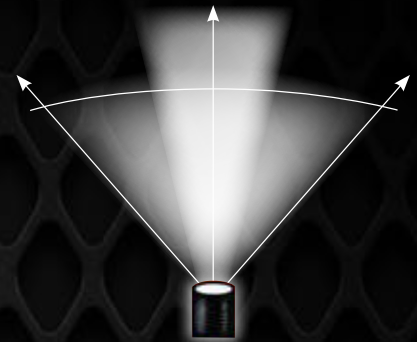

**STREAMLIGHT
HL LED
BEAM PATTERN**

AVAILABLE PRODUCTS



STINGER DS® LED



STINGER® LED



STRION® LED



TLR-1® / TLR-1s®



TLR-2® / TLR-2s®

AVAILABLE PRODUCTS



STINGER® LED HP



STINGER DS® LED HP



STRION® LED HP



POLYTAC® HP



TLR-1 HP®



TLR-1s HP®

AVAILABLE PRODUCTS



PROTAC HL® 3




PROTAC HL®



STINGER LED HL®



STINGER DS LED HL®



STRION® LED HL™



SCORPION® HL



TLR-1 HL®



TLR-2 HL®

STINGER/STRION SERIES

// PERFORMANCE.PERIOD.

// **STREAMLIGHT TASK-SPECIFIC TECHNOLOGY:
CHOOSE THE LIGHT INTENSITY ALLOWING YOU TO
CHOOSE THE RIGHT LIGHT FOR THE JOB.**



USE THIS EASY COMPARISON CHART TO CHOOSE THE BEST LIGHT FOR YOU BASED ON THE FEATURES THAT YOU NEED!

LUMENS
CANDELA/REACH
RUN TIME
MSRP

BEAM STYLE

SPECS
HIGH MODE PERFORMANCE SHOWN.
FOR PERFORMANCE IN OTHER
MODES, SEE MODEL PAGES.


STINGER DS[®] LED
STINGER[®] LED



OUTPUT: 350 lumens
INTENSITY: 24,000 candela
BATTERY: NiMH or NiCd
BEAM DISTANCE: 310 meters
RUN TIME: 2 hours
DS SIZE: 8.85" x 1.62" x 1.17"
(22.48 x 4.11 x 2.97 cm)
DS WEIGHT: 12.8 oz (364 g)
COLOR: Black

TRADITION



STINGER DS[®] LED HP
STINGER[®] LED HP



OUTPUT: 350 lumens
INTENSITY: 56,000 candela
BATTERY: NiMH or NiCd
BEAM DISTANCE: 473 meters
RUN TIME: 2 hours
DS SIZE: 9.65" x 2.2" x 1.17"
(24.51 x 5.59 x 2.97 cm)
DS WEIGHT: 14 oz (396 g)
COLOR: Black

HP SERIES

STINGER DS[®] LED HL[®]
STINGER[®] LED HL[®]



OUTPUT: 640 lumens
INTENSITY: 22,000 candela
BEAM DISTANCE: 297 meters
RUN TIME: 1.25 hours
DS SIZE: 8.85" x 1.62" x 1.17"
(21.36 x 4.11 x 2.97 cm)
DS WEIGHT: 12.8 oz (364 g)
COLOR: Black

HL SERIES










STREAMLIGHT STORIES...

“MY STINGER DS LED WAS RUN OVER AGAIN AND AGAIN ON A MAJOR HIGHWAY, BUT IT’S STILL SHINING!”

In the 8 years that I have been in Law Enforcement, I have seen all kinds of flashlights; but out of them all, Streamlight is the best! I had a Stinger that was run over by an industrial zero turn mower. When I finally found it there was a nick in the bottom cap and another in the light head but everything still worked perfectly. I now have a Stinger DS LED HP that I depend on every day for it’s versatility and dependability.

While changing a tire on my patrol unit, I put the light down on the hood of my car and it ended up in the travel lane of a major highway. It was then run over by at least one 18 wheeler. When I found it, the head was damaged, but it still worked! The bulb is just as bright as ever and both switches are still fully functional. Now that is what I call “ONE TOUGH LIGHT.”

*Officer Robert Willmon
Lufkin, TX*

	LUMENS CANDELA/REACH RUN TIME MSRP	BEAM STYLE	SPECS HIGH MODE PERFORMANCE SHOWN. FOR PERFORMANCE IN OTHER MODES, SEE MODEL PAGES.	
STRION[®] LED 			OUTPUT: 260 lumens INTENSITY: 10,000 candela BEAM DISTANCE: 200 meters RUN TIME: 2 hours SIZE: 5.9" x 1.25" x .95" (14.99 x 3.18 x 2.41 cm) WEIGHT: 5.2 oz (148 g) COLOR: Black or Pink	TRADITION
STRION[®] LED HP 			OUTPUT: 275 lumens INTENSITY: 40,000 candela BEAM DISTANCE: 400 meters RUN TIME: 2 hours SIZE: 7" x 2.2" x X.95" (17.78 x 5.59 x 2.41 cm) WEIGHT: 7.1 oz (202 g) COLOR: Black	HP SERIES
STRION[®] LED HL[®] 			OUTPUT: 500 lumens INTENSITY: 10,000 candela BEAM DISTANCE: 200 meters RUN TIME: 1 hour SIZE: 5.90" x 1.25" x X .95" (14.99 x 3.18 x 2.41 cm) WEIGHT: 5.2 oz (148 g) COLOR: Black	HL SERIES

RECHARGEABLE COMPACT

STINGER SERIES

PERFORMANCE.PERIOD.



STINGER DS LED HL®

STINGER LED HL®

Everything you love about the Stinger with more lumens for more brightness and a wider beam that lights up a whole area from side to side. Now you'll see the dangers that may be hiding in corners in rooms, tunnels, alleyways, cars, and more.



With (STROBE)
Double tap switch to activate.



LIGHT SOURCE: C4® LED, with a 50,000 hour lifetime.

LENS: Unbreakable polycarbonate with scratch-resistant coating. O-ring sealed.

BATTERY: 3-cell, 3.6 Volt NiMH sub-C battery, rechargeable up to 1000 times offered in all systems.

ON/OFF: Multi-function, easy access head mounted push-button switch designed for extremely long life; tested at 1 million actuations. Stinger DS® LED HL™ provides a second multi-function push-button tactical tailswitch where both switches offer full feature control independent of each other.

FEATURES: IPX4 Rated for water resistant operation. 1 meter impact resistance tested. Serialized for positive identification. LED Charge-continuity indicator on charger base. Compact, snap-in charger mounts in any position.

DS LED HL LED HL

75454	75430	with 120V AC/12V DC - 2 holders (NiMH)
75455	75431	with 120V AC (NiMH)
75456	75432	with 12V DC (NiMH)
75458	75434	with 120V AC/12V DC - 1 PiggyBack (NiMH)
75457	75433	with 120V AC/12V DC - FC 2 holders (NiMH)
75453	75429	without Charger (NiMH)

HL SERIES

DS SIZE: 8.85" x 1.62" x 1.17"
(22.48 x 4.11 x 2.97 cm)

DS WEIGHT: 12.8 oz (364 g)

SIZE: 8.41" x 1.62" x 1.17"
(21.36 x 4.11 x 2.97 cm)

WEIGHT: 12.4 oz (352 g)

COLOR: Black

	HIGH	MEDIUM	LOW
LUMENS:	640	340	170
CANDELA:	22,000	11,000	5,500
DISTANCE:	297m	210m	148m
RUN TIME:	1.25h	2h	4h

Strobe mode: 5.5 hours of continuous run time



Battery Chargers for:

	5 Unit Bank	2.5 hr Fast
Stinger DS LED HL	75400	75103
Stinger LED HL	75400	75103
Stinger DS LED HP	75400	75103
Stinger LED HP	75400	75103
Stinger DS LED	75400	75103
Stinger LED	75400	75103

	Fast Piggyback®	Steady Piggyback®
	75276	75275
	75276	75275
	75276	75275
	75276	75275
	75276	75275
	75276	75275

Battery Stick for:

	NiCd	NiMH
Stinger DS LED HL	-	75375
Stinger LED HL	-	75375
Stinger DS LED HP	75175	75375
Stinger LED HP	75175	75375
Stinger DS LED	75175	75375
Stinger LED	75175	75375

Charge Cords for:

	12V Cig	12V DC	120AC
Stinger DS LED HL	22051	22050	22311
Stinger LED HL	22051	22050	22311
Stinger DS LED HP	22051	22050	22311
Stinger LED HP	22051	22050	22311
Stinger DS LED	22051	22050	22311
Stinger LED	22051	22050	22311

THE STINGER SERIES IS ALWAYS ON THE JOB.

IT'S A DUTY-LIGHT, A PRECISION INDUSTRIAL INSTRUMENT AND A MUST-HAVE TOOL FOR AUTOMOTIVE TECHNICIANS.

STINGER DS[®] LED HP STINGER[®] LED HP

This powerful duty light throws a long, far-reaching, bright white beam that illuminates whatever's way up ahead, whether it's at the end of an alley or up on a ledge. Dual switches let you hold and operate the light however it's most comfortable for you.

DS LED HP	LED HP	
75863	75763	with AC/DC - 2 Holders - Black
75861	75761	with AC - Black
75862	75762	with DC (NiCd) - Black
75899	75799	with DC (NiMH) - Black
75882	75782	with AC/DC - PiggyBack [®] Charger - Black
75885	-	with AC/DC - Fast Charger - Black
75860	75760	without Charger (NiCd) - Black
75900	75980	without Charger (NiMH) - Black



	HIGH	MEDIUM	LOW
LUMENS:	350	175	85
CANDELA:	56,000	28,000	14,000
DISTANCE:	473m	335m	237m
RUN TIME:	2h	3.75h	7.25h

Strobe mode: 5.5 hours of continuous run time

HP SERIES

BATTERY: NiMH or NiCd
DS SIZE: 9.65" x 2.2" x 1.17"
(24.51 x 5.59 x 2.97 cm)
DS WEIGHT: 14 oz (396 g)
COLOR: Black

STINGER DS[®] LED STINGER[®] LED

We pumped up the power and turned up the brightness. The Stinger LED now delivers 350 lumens/24,000 candela on high, 175 lumens/12,000 candela on medium, and 85 lumens/6,000 candela on low. It's the optimal balance of lumens/candela/run time and value!

DS LED	LED	
75813	75713	with AC/DC Steady Charge - Black
75811	75711	with AC Steady Charge - Black
75832	75732	with AC/DC Steady Charge PiggyBack [®] - Black
75835	75735	with AC/DC Fast Charge - Black
75812	75712	with DC Steady Charge - (NiCd) - Black
75853	75753	with DC Steady Charge (NiMH) - Black
75810	75710	without Charger (NiCd) - Black
75970	75960	without Charger (NiMH) - Black



	HIGH	MEDIUM	LOW
LUMENS:	350	175	85
CANDELA:	24,000	12,000	6,000
DISTANCE:	310m	219m	155m
RUN TIME:	2h	3.75h	7.25h

Strobe mode: 5.5 hours of continuous run time

TRADITION

BATTERY: NiMH or NiCd
DS SIZE: 8.85" x 1.62" x 1.17"
(22.48 x 4.11 x 2.97 cm)
DS WEIGHT: 12.8 oz (364 g)
COLOR: Black



Holsters for:	Leather Plain	Leather Weave	Std. Nylon	Loop Nylon	Ring Holder
Stinger DS LED HL	75133	75134	75927	75928	75906
Stinger LED HL	75133	75134	75927	75928	75906
Stinger DS LED HP	-	-	75910	75928	75906
Stinger LED HP	-	-	75910	75928	75906
Stinger DS LED	75133	75134	75927	75928	75906
Stinger LED	75133	75134	75927	75928	75906



Lenses & Wands for:	Red Flip Lens	Green Flip Lens	Blue Flip Lens	Red Wand	White Wand	Blue Wand	Yellow Wand	Glow Wand
Stinger DS LED HL	75115	75117	75116	75903	75908	75902	75904	75913
Stinger LED HL	75115	75117	75116	75903	75908	75902	75904	75913
Stinger DS LED HP	-	-	-	75946	75949	75947	75948	75950
Stinger LED HP	-	-	-	75946	75949	75947	75948	75950
Stinger DS LED	75115	75117	75116	75903	75908	75902	75904	75913
Stinger LED	75115	75117	75116	75903	75908	75902	75904	75913



RECHARGEABLE COMPACT

POLYSTINGER SERIES

// PERFORMANCE.PERIOD.

BUILT FOR DURABILITY AND PERFORMANCE.

POLYSTINGER® LED HAZ-LO®

High-performance, Intrinsically Safe Class I, Div. 1 Flashlight for hazardous locations, atmospheres and environments, including petro-chem, utility and other heavy industrial applications.



Intrinsic Safety for Haz. Loc.
Cl. I, II; Div.1 Gr.CDFG
Cl. III, 138C (T3C)
Non-Incendive: Cl.I Div.2 Gr.ABCD
Product is tested per
ANSI/NEMA FL-1 2009 standard



LIGHT SOURCE: C4® LED, with a 50,000 hour lifetime.

LENS: Unbreakable polycarbonate with scratch-resistant coating holds up against spills and maintains clarity in difficult work conditions. O-ring sealed.

BATTERY: 4-cell, 4.8 Volt nickel-cadmium sub-C battery is rechargeable up to 1,000 times.

ON/OFF: Multi-function, head-mounted, electronic push-button switch designed for extremely long life; tested at one million actuations.

FEATURES: IPX4 rated for water-resistant operation. 3 meter impact resistance tested. LED charge-continuity indicator on charger base. Compact, snap-in charger mounts in any position. Serialized for positive identification. Intrinsically safe. Includes wrist lanyard.

	HIGH	LOW
LUMENS:	130	50
CANDELA:	15,000	5,700
DISTANCE:	245m	151m
RUN TIME:	4h	12h


Moonlight mode: 20 days of continuous run time

SIZE: 10.2" x 1.76" x 1.34"
(25.9 x 4.47 x 3.4 cm)

WEIGHT: 13.5 oz (382 g)

COLOR: Black or Yellow

76442	120V AC/12VDC-Black
76412	120V AC/12VDC-Yellow
76443	120V AC-Black
76413	120V AC-Yellow
76411	12V DC-Yellow
76441	12V DC-Black
76452	120V AC/12V DC Fast Charger-Black
76422	120V AC/12V DC Fast Charger-Yellow
76453	120V AC Fast Charger-Black
76423	120V AC Fast Charger-Yellow
76421	12V DC Fast Charger-Yellow
76451	12V DC Fast Charger-Black
76410	Without Charger-Yellow
76440	Without Charger-Black

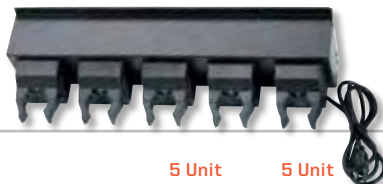

Battery Chargers for:	5 Unit Bank	5 Unit Bank Fast	10 hr Charger	2.5 hr Fast	Fast Piggyback®	Steady Piggyback®	Charge Cords for:	12V Cig	12V DC	120AC
PolyStinger LED Haz-Lo	75400	75401	75100	75103	75276	75275	PolyStinger LED Haz-Lo	22051	22050	22311
PolyStinger DS LED	75400	75401	75100	75103	75276	75275	PolyStinger DS LED	22051	22050	22311
PolyStinger LED	75400	75401	75100	75103	75276	75275	PolyStinger LED	22051	22050	22311



POLYSTINGER DS[®] LED POLYSTINGER[®] LED

Intense brightness, long-range, rechargeability and long run time in a durable nylon polymer housing plus dual full-function switches—one in the tailcap and one on the head.



LIGHT SOURCE: C4[®] LED, with a 50,000 hour lifetime.

LENS: Unbreakable polycarbonate with scratch-resistant coating. O-ring sealed.

BATTERY: 3-cell, 3.6 Volt Ni-Cd sub-C battery rechargeable up to 1,000 times. Also available with 3-cell, 3.6 Volt Ni-MH sub-C battery, rechargeable up to 1,000 times.

ON/OFF: Multi-function, easy access, head-mounted, push-button switch designed for extremely long life; tested at one million actuations. DS model also has a second multi-function push-button tactical tailswitch; both switches offer full feature control independent of each other.

FEATURES: IPX4 rated for water-resistant operation. 3 meter impact resistance tested. LED charge-continuity indicator on charger base. Compact, snap-in charger mounts in any position. Serialized for positive identification.

	HIGH	MEDIUM	LOW
LUMENS:	385	195	95
CANDELA:	26,000	13,000	6,500
DISTANCE:	310m	219m	155m
RUN TIME:	2h	3.75h	7.25h

Strobe mode: 5.5 hours of continuous run time

DS SIZE: 8.64" x 1.76" x 1.21"
(21.95 x 4.47 x 3.07 cm)
DS WEIGHT: 11.9 oz (338 g)
DS COLOR: Black

DS LED	LED	
-	76163	120V AC/DC 2 Holders-Yellow
76813	76113	120V AC/DC 2 Holders-Black
-	76161	120V AC-Yellow
76811	76111	120V AC-Black
-	76162	12V DC-Yellow
-	76199	12V DC-Yellow NiMH Battery
76812	786112	12V DC-Black
76849	76149	12V DC-Black-NiMH Battery
-	76182	120V AC/DC 1 PiggyBack Holder-Yellow
76832	76132	120V AC/DC 1 PiggyBack Holder-Black
-	76185	120V AC/DC Fast Charge-2 holders-Yellow
76835	76135	120V AC/DC Fast Charge-2 holders-Black
-	76166	120V AC/DC Fast Charge-1 PiggyBack Holder-Yellow
-	76116	120V AC/DC Fast Charge-1 PiggyBack Holder-Black
-	76160	Without Charger-Yellow
-	76203	Without Charger-Yellow-NiMH Battery
76810	76110	Without Charger-Black
76850	76150	Without Charger-Black-NiMH Battery



Battery Sticks for:	NiCd	NiMH	Holsters for:	Leather Plain	Leather Weave	Holster	Loop Holster	Ring Holder	Red Wand	White Wand	Blue Wand	Yellow Wand	Glow Wand
PolyStinger LED Haz-Lo	76375	-	PolyStinger LED Haz-Lo	-	-	75927	75928	75906	75933	75938	75932	75934	75943
PolyStinger DS LED	75175	75375	PolyStinger DS LED	75133	75134	75927	75928	75906	75933	75938	75932	75934	75943
PolyStinger LED	75175	75375	PolyStinger LED	75133	75134	75910	75928	75906	75933	75938	75932	75934	75943

RECHARGEABLE COMPACT

STINGER SERIES

// PERFORMANCE.PERIOD.



THE STANDARD AND THE EVOLUTION.

STINGER LITE PIPE



SIZE: 19.62" x 1.5" x 1.07"
(49.84 x 3.81 x 2.71 cm)
WEIGHT: 12.3 oz (339 g)
COLOR: Black

LUMENS:	220
RUN TIME:	3h 15m

This ultra-thin rechargeable work light has a removable, rotating hook, so it can hang almost anywhere; and it's so thin it fits into tight spots to get light right where you need it. The Stinger Lite Pipe is available as a complete unit or, if you have a Xenon Stinger, you can buy the Lite Pipe Kit to convert it to a Stinger Lite Pipe.

LIGHT SOURCE: 8 LEDs for uniform brightness.

LENS: Impact resistant polycarbonate cone with scratch-resistant coating. O-ring sealed.

BATTERY: 3-cell, 3.6 Volt Ni-Cd sub-C battery rechargeable up to 1,000 times. Also available with 3-cell, 3.6 Volt Ni-MH sub-C battery, rechargeable up to 1,000 times.

ON/OFF: Easy access head mounted push-button switch designed for extremely long life; tested at 1 million actuations.

FEATURES: IPX4 Rated for water resistant operation. 1 meter impact resistance tested. Serialized for positive identification. LED Charge-continuity indicator on charger base. Compact, snap-in charger mounts in any position.

NiCd	NiMH	
75684	75685	with 120V AC/DC Steady Charge
75654	-	with 120V AC/DC PiggyBack Steady Charge
75650	75651	(Without Charger)
75951		Stinger Lite Pipe Kit (For use with your existing Xenon Stinger)

Stinger Lite Pipe Kit
(Works with Xenon Stingers manufactured after 2002)



Battery Chargers for:
Stinger Lite Pipe 75400
Stinger Classic LED 75400

5 Unit Bank
75401

5 Unit Bank Fast
75100

10 hr Charger
75103

2.5 hr Fast
75276

Fast Piggyback®
75275

Steady Piggyback®
22051

Charge Cords for:
Stinger Lite Pipe 22050
Stinger Classic LED 22051

12V Cig
22051

12V DC
22050

120AC
22311

"YOUR LIGHTS HAVE BEEN ON MY BELT FOR 15 YEARS. NOT ONCE HAVE THEY FAILED!"

I recently made the big mistake of ordering and using a competitor's product. It was a huge mistake. I have since returned completely and totally to Streamlight. Your lights are the toughest and most reliable on the market and I am proud to carry them with me on duty and off. For 15 years, your lights have been on my belt and not once have they ever failed. Thank you for all the great products.

*Sincerely,
Sergeant Philip Freeman
Apache Junction Police Department*

STINGER® CLASSIC LED



So many people loved the size, shape and feel of the original Stinger that we brought it back ... as a powerful, durable LED flashlight. The new rechargeable Stinger Classic LED gives you a smooth beam with plenty of peripheral light and 390 lumens on high. It has three lighting modes plus a strobe.

LIGHT SOURCE: C4® LED, with a 50,000 hour lifetime.

LENS: Custom acrylic optic. Gasket sealed.

BATTERY: 3-cell, 3.6 Volt Ni-Cd sub-C battery rechargeable up to 1,000 times. Also available with 3-cell, 3.6 Volt Ni-MH sub-C battery, rechargeable up to 1,000 times.

ON/OFF: Multi-function, easy access head mounted push-button switch designed for extremely long life; tested at 1 million actuations.

FEATURES: IPX4 Rated for water resistant operation. 1 meter impact resistance tested. Serialized for positive identification. LED Charge-continuity indicator on charger base. Compact, snap-in charger mounts in any position.

NiCd	NiMH	
75662	-	with 120V AC/DC - 2 Holders
75663	-	with 120V AC
75664	75675	with 12V DC
75666	-	with 120V AC/DC - 1 PiggyBack Holder
75665	-	with 120V AC/DC Fast Charger - 2 Holders
75660	75661	[Without Charger]

SIZE: 7.65" x 1.60" x 1.08"
(19.43 x 4.06 x 2.74 cm)

WEIGHT: 11.1 oz (315 g)

COLOR: Black

	HIGH	MEDIUM	LOW
LUMENS:	390	210	100
CANDELA:	13,200	6,500	3,100
DISTANCE:	230m	161m	111m
RUN TIME:	1h 45m	3h 45m	6h 45m

Strobe mode: 5 hours of continuous run time



Battery Sticks for:
Stinger Lite Pipe
Stinger Classic LED

NiCd
75175
75175

NiMH
75375
75375

Holsters for:
Stinger Lite Pipe
Stinger Classic LED

Leather Plain
-
75133

Leather Weave
-
75134

Holster
-
75910

Loop Holster
75928
75928

Ring Holder
75906
75906

Red Wand
-
75933

White Wand
-
75938

Blue Wand
-
75932

Yellow Wand
-
75934

Glow Wand
-
75943

RECHARGEABLE COMPACT

STRION SERIES
// PERFORMANCE.PERIOD.

LITTLE
IN STATURE, BIG IN **LIGHT.**

STRION LED HL®

What if you could put the power of a Stinger in a compact light? That's what we did with the Strion. We even made them fit long gun-mounts so you can attach a Strion to your weapon. This little Strion LED HL casts a bright white beam that spreads out wide to flood an entire area with light.



	HIGH	MEDIUM	LOW
LUMENS:	500	250	125
CANDELA:	10,000	5,000	2,500
DISTANCE:	200m	141m	100m
RUN TIME:	1h	2h	3h 30m

Strobe mode: 2.5 hours of continuous run time

HL SERIES

SIZE: 5.90" x 1.25" x X .95"
(14.99 x 3.18 x 2.41 cm)

WEIGHT: 5.2 oz (148 g)

COLOR: Black

LIGHT SOURCE: C4® LED, with a 50,000 hour lifetime.

LENS: Borofloat High Temperature Glass. Gasket sealed.

BATTERY: Lithium-ion battery with on-board safety control circuit, 3.75V, 2,000mAh minimum, rechargeable up to 1,000 times.

ON/OFF: Multi-function, push-button, tactical tailswitch. One-handed operation of momentary, variable intensity or strobe mode.

FEATURES: IPX4 rated design; water resistant operation. 2 meter impact resistance tested. LED Charge-continuity indicator on charger base. Compact, snap-in charger mounts in any position. Serialized for positive identification.

74752	with 120V AC/12V DC - 2 holders
74751	with 120V AC/12V DC - 1 holder
74755	with 120V AC/12V DC - 1 holder Clam packaged
74753	with 120V AC
74754	with 12V DC
74750	without Charger
74509	Strion LED HL with grip - with 120V AC



Battery Chargers	6 Unit Bank 120V	6 Unit Bank DC	Charger Holder	Battery Stick	Li-ion	Charge Cords	12V Cig	12V DC	120AC	Rail Mount	12 Ga. Mag Tube	Vertical Grip
Strion LED HL	74400	74401	74102	Strion LED HL	74175	Strion LED HL	22051	22050	22311	74200	69903	69114
Strion LED HP	74400	74401	74102	Strion LED HP	74175	Strion LED HP	22051	22050	22311	74200	69903	69114
Strion LED	74400	74401	74102	Strion LED	74175	Strion LED	22051	22050	22311	74200	69903	69114

STRION[®] LED HP



LIGHT SOURCE: C4[®] LED, with a 50,000 hour lifetime.

LENS: Unbreakable polycarbonate lens with scratch-resistant coating. O-ring sealed.

BATTERY: Lithium-ion battery with on-board safety control circuit, 3.75V, 2,000mAh minimum, rechargeable up to 1,000 times.

ON/OFF: Multi-function, push-button, tactical tailswitch. One-handed operation of momentary, variable intensity or strobe mode.

FEATURES: LED charge-continuity indicator on charger base. Compact, snap-in charger mounts in any position. IPX4 rated design for water-resistant operation. Two meter impact resistant tested. Serialized for positive identification.

This bright, powerful light delivers 275 lumens of performance. The beam is not just intense, it's far-reaching. Ideal for long-range lighting.



HP SERIES

SIZE: 7" x 2.2" x X..95"
(17.78 x 5.59 x 2.41 cm)

WEIGHT: 7.1 oz (202 g)

COLOR: Black

	HIGH	MEDIUM	LOW
LUMENS:	275	138	70
CANDELA:	40,000	20,000	10,000
DISTANCE:	400m	283m	200m
RUN TIME:	2h	4h	7h 30m

Strobe mode: 5.5 hours of continuous run time

74501	with AC/12V DC-1 Holder-Black
74502	with AC/12V DC-2 Holders-Black
74503	with AC-Black
74504	with DC-Black
74500	without Charger-Black

STRION[®] LED



The fully adjustable ring adjusts to any hand size, providing a sure grip for one-handed operation.



Strion LED is a powerful value that's perfect for the broadest range of lighting needs – now available with adjustable ring for one-handed operation.

LIGHT SOURCE: C4[®] LED, with a 50,000 hour lifetime.

LENS: Borofloat high-temperature glass. Gasket-sealed.

BATTERY: Lithium-ion battery with on-board safety control circuit, 3.75V, 2,000mAh minimum, rechargeable up to 1,000 times.

ON/OFF: Multi-function, push-button, tactical tailswitch. One-handed operation of momentary, variable intensity or strobe mode.

FEATURES: LED charge-continuity indicator on charger base. Compact, snap-in charger mounts in any position. IPX4 rated design for water-resistant operation. 2 meter impact resistance. Serialized for positive identification. Anti-roll ring included. Adjustable ring version includes pocket clip, anti-roll head and adjustable grip-ring. Available in HL model.

	HIGH	MEDIUM	LOW
LUMENS:	260	130	65
CANDELA:	10,000	5,000	2,500
DISTANCE:	200m	141m	100m
RUN TIME:	2h	4h	7h 30m

Strobe mode: 5.5 hours of continuous run time

TRADITION

SIZE: 5.9" x 1.25" x .95"
(14.99 x 3.18 x 2.41 cm)

WEIGHT: 5.2 oz (148 g)

COLOR: Black

74301	with AC/12V DC-1 Holder-Black
74302	with AC/12V DC-2 Holders-Black
74303	with AC-Black
74304	with DC-Black
74308	with AC/DC-Black-Blister
74300	without Charger-Black
74309	Strion LED with grip - with 120V AC
74054	Strion Grip Ring Accessory Pack



Holsters for:
Strion LED HL
Strion LED HP
Strion LED

Leather Plain
74059
74059

Leather Weave
74060
74060

Std. Nylon
75910
85909

Nylon Option
85905
85905

Lenses & Wands for:
Strion LED HL
Strion LED HP
Strion LED

Red Flip Lens
85115
85115

Green Flip Lens
85117
85117

Blue Flip Lens
85116
85116

Red Wand
74903
74903

White Wand
75949
-

Blue Wand
75947
-

Yellow Wand
74904
74904

Glow Wand
74913
75950
74913

RECHARGEABLE FULL-SIZE

SL-20L SERIES

// PERFORMANCE.PERIOD.



SL-20L®



This full-size, full-power, rechargeable C4® LED professional grade light delivers the intense brightness and the run times you need for a wide variety of jobs.

LIGHT SOURCE: C4® LED, with a 50,000 hour lifetime.

LENS: Unbreakable polycarbonate lens. Scratch-resistant coating. O-ring sealed.

BATTERY: 5-cell, 6.0 Volt Ni-Cd sub-C battery, rechargeable up to 1,000 times. Also available with 5-cell, 6.0 Volt Ni-MH sub-C battery, rechargeable up to 1,000 times.

ON/OFF: Multi-function, push-button barrel switch. One handed operation of momentary, variable intensity or strobe mode.

FEATURES: IPX4 rated design; water-resistant operation. 1 meter impact resistance tested. Serialized for positive identification. Charge switch illuminates when flashlight is charging.



NiCd	NiMH	
20603	20703	with 120V AC/DC - 2 Sleeves-Black
20601	20701	with 120V AC NiCd-Black
20602	20702	with 12V DC NiCd-Black
20600	20700	without Charger-Black

	HIGH	MEDIUM	LOW
LUMENS:	350	160	10
CANDELA:	60,000	27,000	1,000
DISTANCE:	490m	329m	63m
RUN TIME:	1.25h	2h	4h

SIZE: 13.1" x 2.5" x 1.5"
(33.3 x 6.35 x 3.81 cm)

WEIGHT: 1 lb 11.2 oz (770 g)

COLOR: Black

Strobe mode: 4 hours of continuous run time



Battery Chargers for:	5 Unit Bank 120v	5 Unit Bank DC	Charge Sleeve
SL-20L	75400	75103	75276
SL-20LP	75400	75103	75276



Charge Cords for:	12V Cig	12V DC	120AC
SL-20L	22051	22050	22311
SL-20LP	22051	22050	22311

STREAMLIGHT STORIES...

"IN OVER 15 YEARS, I'VE DROPPED MY SL-20X PLENTY OF TIMES, BUT IT'S NEVER LET ME DOWN!"

"My Streamlight SL-20X has been working with me in a steel mill nearly every day for over 15 years. It's hard to imagine harsher conditions anywhere else. This light has been dropped off of 40' crane runways, into sluiceways and pits (to name a few things), seen extremes of hot and cold, and banged around every way imaginable. Although it looks a bit weathered, it still works like new."

*Richard C. Burns Jr.
Highspire, PA*

SL-20LP®



All the power and performance of our SL-20L® in a durable, nylon, polymer housing.

LIGHT SOURCE: C4® LED, with a 50,000 hour lifetime.

LENS: Unbreakable polycarbonate lens. Scratch-resistant coating. O-ring sealed.

BATTERY: 5-cell, 6.0 Volt Ni-Cd sub-C battery, rechargeable up to 1,000 times. Also available with 5-cell, 6.0 Volt Ni-MH sub-C battery, rechargeable up to 1,000 times.

ON/OFF: Multi-function, push-button barrel switch. One handed operation of momentary, variable intensity or strobe mode.

FEATURES: IPX4 rated design; water-resistant operation. 1 meter impact resistance tested. Serialized for positive identification.



NiCd	NiMH	
25223	25323	with 120V AC/DC 2 Sleeves - Yellow
25203	25303	with 120V AC/DC 2 Sleeves - Black
25213	25313	with 120V AC/DC 2 Sleeves - Orange
25221	25321	with 120V AC - Yellow
25201	25301	with 120V AC - Black
25211	25311	with 120V AC - Orange
25222	25322	with 12V DC - Yellow
25202	25302	with 12V DC - Black
25212	25312	with 12V DC - Orange
25220	25320	without Charger - Yellow
25200	25300	without Charger - Black
25210	25310	without Charger - Orange

	HIGH	MEDIUM	LOW
LUMENS:	350	160	10
CANDELA:	60,000	27,000	1,000
DISTANCE:	490m	329m	63m
RUN TIME:	1.25h	2h	4h

SIZE: 13.2" x 2.5" x 1.5"
(33.5 x 6.35 x 3.81 cm)
WEIGHT: 1 lb 4.8 oz (590 g)
COLOR: Black, Yellow or Orange

Strobe mode: 4 hours of continuous run time



Battery Stick for:
SL-20L
SL-20LP

NiCd 77175
NiMH 77375

Holsters for:
SL-20L
SL-20LP

Ring Holder 22911
Std. Nylon 25090

Wands for:
SL-20L
SL-20LP

Red Wand 22511
White Wand 22517

Blue Wand 22512
Yellow Wand 22519

Glow Wand 22513

RECHARGEABLE LANTERNS
















LANTERN SERIES
// PERFORMANCE.PERIOD.

RECHARGEABLE

LANTERN SERIES
// PERFORMANCE.PERIOD.

STREAMLIGHT TASK-SPECIFIC TECHNOLOGY: CHOOSE THE LIGHT INTENSITY ALLOWING YOU TO CHOOSE THE RIGHT LIGHT FOR THE JOB.

USE THIS EASY COMPARISON CHART TO CHOOSE THE BEST LIGHT FOR YOU BASED ON THE FEATURES THAT YOU NEED!

	LUMENS CANDELA/REACH RUN TIME MSRP	BEAM STYLE	SPECS HIGH MODE PERFORMANCE SHOWN. FOR PERFORMANCE IN OTHER MODES, SEE MODEL PAGES.	
E-FLOOD[®] LITEBOX[®] HL™  HL SERIES			OUTPUT: 3,600 lumens INTENSITY: 31,000 candela BEAM DISTANCE: 352 meters RUN TIME: 2 hours SIZE: 12.3" x 5.1" x 7.7" <small>(31 x 13 x 19 cm)</small> WEIGHT: 10.4 lb (4.7 kg) COLOR: International Safety Orange	HL SERIES
E-FLOOD[®] LITEBOX[®] E-FLOOD[®] FIREBOX[®] 			OUTPUT: 615 lumens INTENSITY: 4,000 candela BEAM DISTANCE: 126 meters RUN TIME: 8 hours SIZE: 11.5" x 5.1" x 7" <small>(29.2 x 13 x 17.8 cm)</small> WEIGHT: 7 lbs 14.4 oz (3.58 kg) COLOR: International Safety Orange, High-Visibility Yellow, or Beige	
E-SPOT[®] LITEBOX[®] E-SPOT[®] FIREBOX[®] 			OUTPUT: 540 lumens INTENSITY: 55,000 candela BEAM DISTANCE: 469 meters RUN TIME: 7 hour SIZE: 11.5" x 5.1" x 7" <small>(29.2 x 13 x 17.8 cm)</small> WEIGHT: 7 lbs 14.4 oz (3.58 kg) COLOR: International Safety Orange, High-Visibility Yellow, or Beige	
FIRE VULCAN[®] LED 			OUTPUT: 145 lumens INTENSITY: 80,000 candela BEAM DISTANCE: 566 meters RUN TIME: 3 hours SIZE: 7.5" x 5" x 6.5" <small>(19.05 x 12.7 x 16.51 cm)</small> WEIGHT: 1 lb 13.6 oz (839 g) COLOR: High-Visibility Orange	
HID LITEBOX[®] 			OUTPUT: 3,350 lumens INTENSITY: 1,000,000 candela BEAM DISTANCE: 2,000 meters RUN TIME: 1.75 hours SIZE: 14.9" x 5.1" x 8.8" <small>(38 x 13 x 23 cm)</small> WEIGHT: 10 lbs 1.6 oz (4.6 kg) COLOR: International Safety Orange or Black	

E-FLOOD SERIES

// PERFORMANCE.PERIOD.



E-FLOOD[®] LITEBOX[®] HL[™]

This super-bright, 3,600 lumen lantern really floods an area with light. The intense brightness stretches out from side to side to illuminate the scene. Choose from 3 levels of lighting. Unique diffuser lets you select from two flood levels in all three modes for outdoor or indoor use. Ideal for illuminating a rescue scene or an entire plant floor, the E-Flood LiteBox HL runs 8 hours at 1200 lumens, 4 hours at 2400 lumens and 2 hours at 3600 lumens.



NFPA

Rack meets requirements of NFPA 1901-14.1.11.2 (2003) mounted in any position



LIGHT SOURCE: Six (6) C4[®] LEDs, with a 50,000 hour lifetime.

LENS: Unbreakable polycarbonate with scratch-resistant coating. O-ring sealed.

BATTERY: Zero-maintenance 12V, 7.2Ah sealed lead acid and is rechargeable up to 500 times using existing Litebox[®] system charge racks. Red and green LEDs provide charge status feedback. 10 Hour charge to 90% battery capacity with continuous trickle charge to maximize battery capacity. E-FLOOD LiteBox HL battery will continue to charge while operating directly from an external 12V DC power source when using the remote cord.

ON/OFF: Toggle switch allows operation from internal battery or continuous operation from external 12VDC power source.

FEATURES: C4[®] LED technology and circuit to provide regulated light output throughout battery life. Serialized for positive identification. Fits existing Streamlight Litebox[®] chargers.

	HIGH	MEDIUM	LOW
LUMENS:	3,600	2,400	1,200
CANDELA:	31,000	20,000	11,000
DISTANCE:	352m	283m	210m
RUN TIME:	2h	4h	8h

HL SERIES

SIZE: 12.3" x 5.1" x 7.7"
(31 x 13 x 19 cm)

WEIGHT: 10.4 lb (4.7 kg)

COLOR: International Safety Orange

E-Flood HL LiteBox

45661	120V AC/12V DC, shoulder strap & mounting rack - Orange
45664	100V AC/12V DC, shoulder strap & mounting rack - Orange
45665	Vehicle Mount System, 12V DC direct wire rack, shoulder strap - Orange
45660	Without Charger - Orange



Charge Racks:

Standard Charge Rack—Orange
Standard Charge Rack—Yellow
Standard Charge Rack—Beige
Vehicle Mount Charge Rack—Orange
Vehicle Mount Charge Rack—Yellow

Fits All

45070
45072
45073
45071
45074

Charge Cords:

12V CIG
12V DC
120 AC

Fits All

22051
22050
22311

Upgrades for LiteBox/FireBox:

E-Spot Upgrade Kit 45845
E-Flood Upgrade Kit 45842

Shoulder Straps:

Quick Release Strap
Shoulder Strap

Fits All

44050
45232

Battery for:

E-Flood HL LiteBox 45937
E-Flood LiteBox 45937
E-Flood FireBox 45937
E-Spot LiteBox 45937
E-Spot FireBox 45937

THE E-FLOOD & E-SPOT SERIES' ARE ABOUT
DELIVERING
THE RIGHT LIGHT
EXACTLY WHERE
YOU NEED IT.

E-FLOOD® LITEBOX®
E-FLOOD® FIREBOX®

Six C4® LEDs flood bright light over an entire area, such as an equipment room or vault. With its swivel-head and run time of up to 18 hours, the portable/rechargeable E-Flood helps you keep large spaces illuminated, no matter how long your shift lasts.

E-Flood LiteBox

45801	with AC/ DC, shoulder strap and mounting rack-Orange
45821	with AC/DC, shoulder strap and mounting rack-Yellow
45805	Vehicle Mount System with DC, shoulder strap-Orange
45825	Vehicle Mount System with DC, shoulder strap-Yellow
45807	Power Failure System w/AC/DC Chargers and mounting rack-Orange
45817	Power Failure System w/AC/DC Chargers and mounting rack-Beige
45806	without Charger-Orange
45816	without Charger-Beige
45826	without Charger-Yellow

E-Flood FireBox

45811	with AC/DC, dual rear LEDs, shoulder strap and mounting rack-Orange
45815	Vehicle Mount System w/DC, dual rear LEDs, shoulder strap-Orange
45832	without Charger-dual rear LEDs-Orange



The Power Failure System features "Smart" power failure circuitry which automatically illuminates the light when the power goes off



E-Flood FireBox includes dual rear LEDs.

NFPA

Rack meets requirements of NFPA 1901-14.1.11.2 (2003) mounted in any position

	HIGH	LOW
LUMENS:	615	330
CANDELA:	4,000	2,150
DISTANCE:	126m	93m
RUN TIME:	8h	18h

SIZE: 11.5" x 5.1" x 7" (29.2 x 13 x 17.8 cm)

WEIGHT: 7 lbs 14.4 oz (3.58 kg)

COLOR: International Safety Orange, High-Visibility Yellow or Beige

E-SPOT® LITEBOX®
E-SPOT® FIREBOX®

Three C4® LEDs spotlight an area with focused bright light so you can search or make an inspection from a distance. Its swivel-head makes the portable/rechargeable E-Spot great for inspecting places like high bays and ceilings.



E-Spot FireBox includes dual rear LEDs.

NFPA

Rack meets requirements of NFPA 1901-14.1.11.2 (2003) mounted in any position

E-Spot LiteBox

45851	Standard system AC/DC, shoulder strap and mounting rack-Orange
45871	Standard system AC/DC, shoulder strap and mounting rack-Yellow
45855	Vehicle Mount System with 12V DC, shoulder strap-Orange
45875	Vehicle Mount System with 12V DC, shoulder strap-Yellow
45857	Power Failure System, shoulder strap and mounting rack-Orange
45867	Power Failure System, shoulder strap and mounting rack-Beige
45856	without Charger- with shoulder strap-Orange
45866	without Charger- with shoulder strap-Beige
45876	without Charger and shoulder strap- Yellow

E-Spot FireBox

45861	Standard System-Orange
45865	Vehicle Mount System-Orange
45882	without Charger-Orange

	HIGH	LOW
LUMENS:	540	330
CANDELA:	55,000	32,000
DISTANCE:	469m	358m
RUN TIME:	7h	15h

SIZE: 11.5" x 5.1" x 7" (29.2 x 13 x 17.8 cm)

WEIGHT: 7 lbs 14.4 oz (3.58 kg)

COLOR: International Safety Orange, High-Visibility Yellow or Beige (Power Failure model only)

VULCAN SERIES
// PERFORMANCE.PERIOD.

STREAMLIGHT STORIES...

"MY LITEBOX® GOT RUN OVER AND MUTILATED, BUT IT'S STILL SHINING!"

I think you know how tough your Litebox hand-held lights are. However, this one fell off a tailboard and was run over by "something." Guess what? it still works! That's durability! Wow!

*Jeff Kochis
Assistant Chief
City of Hammond Fire Department
Hammond, Indiana*

FIRE VULCAN® LED



A life-saving innovation. This lantern with taillight LEDs will help you be seen, even in thick smoke.

LIGHT SOURCE: C4® LED, impervious to shock with a 50,000 hour lifetime. Two ultra-bright blue LEDs.

LENS: Unbreakable polycarbonate with scratch-resistant coating. O-ring sealed.

BATTERY: Two lightweight Lithium-ion nanotechnology cells. Recharges in five hours.

ON/OFF: Push and hold momentary toggle switch to access eight modes of operation.

LEFT MODES:

- (Optional Programmable 2, 3 or 4)
- 1-Steady High LED/Steady taillights
- 2-Steady Low LED/Steady taillights
- 3-Steady High LED/No taillights
- 4-No LED/Steady taillights

RIGHT MODES:

- (Optional Programmable 2, 3 or 4)
- 1-Steady High LED/Blinking taillights
- 2-Steady Low LED/Blinking taillights
- 3-Blinking High LED/No taillights
- 4-No LED/Blinking taillights

FEATURES: IPX7 rated design (1 meter for 30 minutes). Lantern floats. LED solid state circuitry provides regulated light output throughout battery life. Serialized for positive identification. Fits existing Streamlight Vulcan® chargers.

	HIGH	LOW
LUMENS:	145	70
CANDELA:	80,000	40,000
RUN TIME:	3h	7h

SIZE: 7.5" x 5" x 6.5"
(19.05 x 12.7 x 16.51 cm)
WEIGHT: 1 lb 13.6 oz (839 g)
COLOR: High-Visibility Orange



Ultra-bright blue taillight LEDs make certain you can be seen, even in thick smoke.



Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F, G;
Class III T-Code: T4

NFPA

Rack meets requirements of NFPA 1901-14.1.11.2 (2003) mounted in any position




TWO FIRE VULCAN® LED MODELS:

Standard System: Includes charging rack and both AC and DC chargers.

Vehicle Mount System: Includes 12V DC vehicle-mountable, direct-wire charging rack.

44450	Standard System with AC/DC—Orange
44451	Vehicle Mount with DC—Orange
44454	without Charger—Orange



Charge Racks:
Standard Charge Rack, Orange
Standard Charge Rack, Yellow
Direct Wire 12V DC Charge Rack, Orange



Fits All
44101
44100
44191

Charge Cords:
12V CIG
12V DC
120 AC

Fits All
22051
22050
22311



Shoulder Straps:
Quick Release Strap

Fits All
44050



Battery for:
Fire Vulcan LED

44610



**THE HID LITEBOX:
THE POWER
TO LIGHT AN
ENTIRE SCENE.**

HID LITEBOX[®]

Portable high-intensity searchlight with a one million candela peak beam intensity that powers up instantly and illuminates objects a mile away!

LIGHT SOURCE: 35 watt high intensity discharge xenon lamp with 2,000 hour minimum lifetime.

BATTERY/RUN TIME: Zero-maintenance 12V, 7.2Ah sealed lead acid battery. Rechargeable up to 500 times using existing LiteBox[®] system mounting racks. Red and green LEDs provide charge status feedback. Ten hour charge to 90% battery capacity with continuous trickle charge to maximize battery capacity.

ORANGE BLACK

45601	45621	with 120V AC/12V DC
45604	45624	with 100V AC/12V DC
45600	45620	without Charger
45605	45625	Vehicle Mount System with 12V DC

	HIGH
LUMENS:	3,350
CANDELA:	1,000,000
RUN TIME:	1h 45m

SIZE: 14.9" x 5.1" x 8.8"
(38 x 13 x 23 cm)

WEIGHT: 10 lbs 1.6 oz (4.6 kg)

COLOR: International Safety Orange or Black



Swivel neck shown in 90° position.



Swivel neck shown in 45° position.



10 ft (3 meters) 12V DC power cord plugs into port at rear of light to provide duration lighting - included with all HID LiteBox models

HID LiteBox battery will continue to charge while operating directly from an external 12V DC power source when using the remote cord




Charge Racks:
Standard Charge Rack, Black 45075
Standard Charge Rack, Orange 45070
Standard Charge Rack, Yellow 45072
Standard Charge Rack, Beige 45073
Vehicle Mount Rack, Orange 45071
Vehicle Mount Rack, Yellow 45074



Fits All
Standard Charge Rack, Black 45075
Standard Charge Rack, Orange 45070
Standard Charge Rack, Yellow 45072
Standard Charge Rack, Beige 45073
Vehicle Mount Rack, Orange 45071
Vehicle Mount Rack, Yellow 45074

Charge Cords: **Fits All**
12V CIG 22051
12V DC 22050
120 AC 22311
12V DC (10ft, 3m) 45600



HID LiteBox Lens/Filters:
HID Bulb Kit 45637
Lens Reflector Assy. 45638
Flood Lens 45657
IR Filter 45654



Shoulder Straps: **Fits All**
Quick Release Strap 44050
Shoulder Strap 45232



Battery for:
HID LiteBox 45630
LiteBox 45937
FireBox 45937

WAYPOINT SERIES

// PERFORMANCE.PERIOD.



WAYPOINT®



With its pistol-grip handle, built-in stand and C4® LED that produces 115,000 candela peak beam intensity, the Waypoint® really comes in handy for lighting up an entire scene. Runs on three "C" batteries and its deep-dish parabolic reflector produces a long-range beam with optimum peripheral illumination.



YELLOW	BLACK	
44900	44902	with 12V DC power cord* - w/polymer storage mount
44904	44905	with 12V DC power cord* - Blister packaged - Yellow
44908	44908	Polymer Storage Mount - Black
44903	44903	12V DC power cord
44924	44924	Red Filter
44925	44925	Green Filter

*12V DC power cord does not recharge batteries

	HIGH	LOW
LUMENS:	210	20
CANDELA:	115,000	10,000
DISTANCE:	678m	245m
RUN TIME:	8h 30M	120h

SIZE: 6.75" x 7.14" x 3.5"
(17.15 x 18.14 x 8.89 cm)
WEIGHT: 1 lb 12.8 oz (616 g)
COLOR: Yellow or Black

Unlimited run time when using 12V DC power cord.
Emergency signal run time 120 hours.

Green Filter
reduces
shadows.



Red Filter
preserves
night vision.

WAYPOINT RECHARGEABLE... 5 FEET OF CHARGING CORD 1,800 FEET OF LIGHT.

WAYPOINT® RECHARGEABLE



This 300 lumen rechargeable light has a broader, wider beam than the original Waypoint; and if it drops in water, no problem, it will float on the surface for easy retrieval.

YELLOW	BLACK	
44910	44911	with 120V AC charge cord - Yellow
-	44918	Waypoint Rechargeable Holder - Black
44915	44915	Red Filter
44916	44916	Green Filter

	HIGH	LOW
LUMENS:	300	25
CANDELA:	80,000	6,100
DISTANCE:	560m	155m
RUN TIME:	5h	50h

Emergency signal run time 35 hours.

SIZE: 6.75" x 7.14" x 3.5"
(17.15 x 18.14 x 8.89 cm)
WEIGHT: 1 lb 8.32 oz (691 g)
COLOR: Yellow or Black



Green Filter reduces shadows.

Red Filter preserves night vision.



Includes 120V Charge Cord.



Polymer storage mount allows for secure storage (included with boxed product and also offered as an accessory).

RECHARGEABLE LANTERNS

LANTERN SERIES

// PERFORMANCE.PERIOD.



DELIVERING THE RIGHT LIGHT EXACTLY WHERE YOU NEED IT.

PORTABLE SCENE LIGHT

Streamlight's first portable scene light incorporates the E-Flood® Litebox® HL™ head coupled with two Litebox batteries and produces over 3,600 lumens. Users can choose from 3 levels of lighting and the unique diffuser lets you select either a flood or spot beam in all three modes for outdoor or indoor use. Operators will appreciate the maximum run time of 18 hours in the low mode. The light reaches 72" when fully extended.

LIGHT SOURCE: Six (6) C4® LEDs, with a 50,000 hour lifetime.

LENS: Unbreakable polycarbonate with scratch-resistant coating. O-ring sealed.

BATTERY: Two, zero-maintenance 12V, 7.2Ah sealed lead acid batteries. Rechargeable up to 500 times. Red and green LEDs provide charge status feedback. 10 Hour charge to 90% battery capacity with continuous trickle charge to maximize battery capacity. Battery will continue to charge while operating directly from an external 12V DC power source when using the remote cord.

ON/OFF: Toggle switch allows operation from internal battery or continuous operation from external 12VDC power source.

FEATURES: C4® LED technology and circuit to provide regulated light output throughout battery life. Serialized for positive identification. Includes shoulder strap. Designed for maximum weather resistance.

45670 Portable Scene Light—Yellow

HL SERIES
NEW FOR '14

Cord is built into the pole avoiding snags during deployment

Balanced design; lead Acid batteries provide ballast and stability

Full extension to 72" with the stabilization legs fully deployed and locked in less than 30 seconds



	HIGH	MEDIUM	LOW
LUMENS:	3,600	2,400	1,100
CANDELA:	31,000	20,000	11,000
DISTANCE:	352m	283m	210m
RUN TIME:	5h	9h	18h

SIZE: 22" x 6.5" x 11"
(55.88 x 16.5 x 27.9 cm)
WEIGHT: 25 lb (11.3 kg)
COLOR: Yellow

RIGHT ANGLE SERIES
// PERFORMANCE.PERIOD.

RIGHT ANGLE
SERIES // PERFORMANCE.PERIOD.

USE THIS EASY COMPARISON CHART TO CHOOSE THE BEST LIGHT FOR YOU BASED ON THE FEATURES THAT YOU NEED!


LUMENS
CANDELA/REACH
RUN TIME
MSRP

BEAM STYLE

SPECS


HIGH MODE PERFORMANCE SHOWN.
FOR PERFORMANCE IN OTHER
MODES, SEE MODEL PAGES.

SURVIVOR[®] LED // RECHARGEABLE




OUTPUT: 140 lumens
INTENSITY: 36,000 candela
BEAM DISTANCE: 379 meters
RUN TIME: 3 hours 30 min
SIZE: 7.06" x 2.85" x 2.87"
(17.92 x 7.24 x 7.29 cm)
WEIGHT: 1 lb 1.9 oz (508 g)
COLOR: International Safety Orange, High-Visibility Yellow, or Black

SURVIVOR[®] LED // ALKALINE




OUTPUT: 140 lumens
INTENSITY: 36,000 candela
BEAM DISTANCE: 379 meters
RUN TIME: 4 hours
SIZE: 7.06" x 2.85" x 2.87"
(17.92 x 7.24 x 7.29 cm)
WEIGHT: 13.1 oz (371 g)
COLOR: International Safety Orange, High-Visibility Yellow, or Black

VANTAGE[®]



OUTPUT: 115 lumens
INTENSITY: 7,000 candela
BEAM DISTANCE: 167 meters
RUN TIME: 6 hours
SIZE: 3.26" x 1.47" x 2.56"
(8.28 x 3.73 x 6.5 cm)
WEIGHT: 5.14 oz (145.7 g)
COLOR: Black

POLYTAC 90[®]




OUTPUT: 170 lumens
INTENSITY: 7,000 candela
BEAM DISTANCE: 167 meters
RUN TIME: 3 hours 45 min
SIZE: 5.22" x 1.25" x 1"
(13.3 x 3.18 x 2.54 cm)
WEIGHT: 4.1 oz (116 g)
COLOR: Black, Yellow, or Orange

KNUCKLEHEAD[®] FLOOD



OUTPUT: 200 lumens
INTENSITY: 1,150 candela
BEAM DISTANCE: 68 meters
RUN TIME: 3 hours 30 min
SIZE: 9.2" x 2.85" x 2.75"
(23.4 x 7.2 x 7 cm)
NiCd WEIGHT: 1 lb 7.1 oz (655 g)
ALKALINE WEIGHT: 1 lb 2.3 oz (519 g)
COLOR: International Safety Orange

KNUCKLEHEAD[®] SPOT



OUTPUT: 180 lumens
INTENSITY: 11,000 candela
BEAM DISTANCE: 210 meters
RUN TIME: 3 hours 30 min
SIZE: 9.2" x 2.85" x 2.75"
(23.4 x 7.2 x 7 cm)
NiCd WEIGHT: 1 lb 7.1 oz (655 g)
ALKALINE WEIGHT: 1 lb 2.3 oz (519 g)
COLOR: International Safety Orange

RECHARGEABLE RIGHT ANGLE

SURVIVOR LED SERIES

// PERFORMANCE.PERIOD.



SURVIVOR LED

One of the brightest, right-angle LED flashlights in the world! Class I, Div. 1 rated!



LIGHT SOURCE: C4® LED, shock-proof with a 50,000 hour lifetime.

LENS: Unbreakable polycarbonate with silicone anti-scratch coating is assembled in a heavy-duty bezel. O-ring sealed.

BATTERY: Industrial rechargeable nickel-cadmium 4.8 volt, 1.8 amp hour, 4-cell sub-C battery can be recharged up to 1,000 times. Optional four "AA" alkaline non-rechargeable battery pack provides fast replacement with readily available batteries. Includes optional 4 "AA" alkaline battery cartridge.

ON/OFF: Sonic welded push-button switch designed for extremely long life. A rubber dome push-button actuator provides easy operation, even when wearing heavy gloves.

FEATURES: Serialized for positive identification. 2 meter impact resistant tested. Features a moonlight mode, which is a very low mode that will literally run for days. To get to this feature, simply turn the light on and then hold the switch down through the high, low and strobe settings: after 6 to 8 seconds it will go into the moonlight mode.

NiCd MODEL	HIGH	LOW
LUMENS:	140	47
CANDELA:	36,000	12,000
DISTANCE:	379m	219m
RUN TIME:	3h 30m	13h

Moonlight mode: 20 days of continuous run time
Flash runs 8 hours

ALKALINE MODEL	HIGH	LOW
LUMENS:	140	47
CANDELA:	36,000	12,000
DISTANCE:	379m	219m
RUN TIME:	4h	15h

Moonlight mode: 20 days of continuous run time
Flash runs 8 hours

UL LISTED Class I, Div. 1, Groups C & D T4
Class I, Div. 2, Groups A, B, C, D T4
Class II, Div. 2, Groups F & G
Class III T4

UL LISTED Class I, Div. 1, Groups C & D T4
Class I, Div. 2, Groups A, B, C, D T4
Class II, Div. 2, Groups F & G
Class III T4

UL LISTED Class I, Div. 1, Groups C & D T4 "Exia"
Class I, Div. 2, Groups A, B, C, D, T4
Class II, Div. 2, Groups F&G
Class III T4

UL LISTED Class I, Div. 1, Groups C & D T4 "Exia"
Class I, Div. 2, Groups A, B, C, D, T4
Class II, Div. 2, Groups F&G
Class III T4

NFPA Rack meets requirements of 1901-14.1.11.2 (2003) mounted in any position

MSHA Permissible for use in Gassy Mines, Methane/air only. Appr. No. 20-A1000001-0

SIZE: 7.06" x 2.85" x 2.87"
(17.92 x 7.24 x 7.29 cm)

NiCd WEIGHT: 1 lb 1.9 oz (508 g)

ALKALINE WEIGHT: 13.1 oz (371 g)

COLOR: International Safety Orange, High-Visibility Yellow, or Black

	YELLOW	ORANGE	BLACK	
90513	90503	90523		with Charger/Holders and AC/DC cords
90512	90502	90522		with AC Fast Charger
90519	90509	90528		with DC Fast Charger
90510	90500	90520		without Charger
90541	90540	90545		Alkaline



Alkaline battery cartridge holds four "AA" alkaline batteries.



Battery Chargers for:

Steady Charger Plug-In Charger Holder	90010
Steady Charger PiggyBack® Charger	90110
AC Fast Charger (Includes Holder)	90011
AC PiggyBack® Fast Charger	90111
DC#1 Cigarette Lighter Cord/Fast Charger (Includes Holder)	90012
DC#1 Cigarette Lighter PiggyBack® Fast Charger	90112
DC#2 Direct Wire Cord/Fast Charger (Includes Holder)	90013
120V AC Bank Charger	90400
12V DC Bank Charger	90401

Battery Packs:

Alkaline Battery Cartridge	90542
Battery Pack Assembly—LED Div. 1	90130
Battery Pack Assembly—LED Div. 2	90338

Charge Cords:

120V AC Charger	22311
12V DC Cigarette Lighter Charger	22051
12V DC Direct Wire Charger	22050

"I'VE NEVER HAD A LIGHT PERFORM LIKE THE STREAMLIGHT SURVIVOR LED!"

We responded to a report of a structure fire with heavy smoke; and within a few seconds we had a "flash" on the fire. My helmet light was melted and my helmet was charred to the point of having to get a new one. I looked down on my shoulder, where the Survivor LED was clipped, to notice that that light had also suffered damage. The bezel was warped and the lens had small cracks as well as being warped, but the light was still working AND worked for the rest of the night during overhaul stages of the fire.

Steve Russo, Firefighter/Paramedic, Lakeside Fire Protection District

VANTAGE®

The solution to firefighter's hands-free lighting needs. Compact, powerful and shock-proof!

SIZE: 3.26" x 1.47" x 2.56"
(8.28 x 3.73 x 6.5 cm)
WEIGHT: 5.14 oz (145.7 g)
COLOR: Black

LUMENS: 115
CANDELA: 7,000
DISTANCE: 167m
RUN TIME: 6h

69140	Vantage LED Tactical Helmet Light-Black
85175	Lithium Batteries-2 Pack



Dual direction, easy access on/off switch.

470nm ultra-bright blue taillight LED.

NFPA Meets requirements of NFPA 1971-8.6 (2007); 500° heat resistance test
CE Meets applicable European Community Directives

STREAMLIGHT TECHNOLOGY: PRODUCT-SPECIFIC DESIGN ALLOWS YOU TO TARGET THE BEAM.

MOUNTING VERSATILITY:

Clamp the Vantage® light with C4® technology onto any traditional or modern firefighter's helmet or hard hat. It rotates and can be clamped above or below the brim. The Vantage has 115 lumens of light and a blue safety taillight LED.



POLYTAC 90®

This versatile, right angle compact tactical flashlight can clip onto turn-out gear, or onto our new elastic head strap for a headlamp. It's super bright, can be operated easily with gloves and is encased in a durable nylon polymer housing.

SIZE: 5.22" x 1.25" x 1"
(13.3 x 3.18 x 2.54 cm)
WEIGHT: 4.1 oz (116 g)
COLOR: Black, Yellow or Orange

	HIGH	LOW
LUMENS:	170	17
CANDELA:	7,000	700
DISTANCE:	167m	53m
RUN TIME:	3h 45m	30h

Strobe runs 6 hours

Gear Keeper® makes your job easier while preventing loss of light.

Gear Keeper® Tether features spectra nylon line with 36" extension and 6 oz. retraction force.



Headstrap

YELLOW	ORANGE	BLACK	
88831	88834	88830	with lithium batteries – Clam packaged
–	88832	–	with lithium batteries & Gear Keeper
88833	88833	88833	Gear Keeper®
14059	14059	14059	Elastic Headstrap - Coyote

KNUCKLEHEAD SERIES

// PERFORMANCE.PERIOD.



KNUCKLEHEAD® FLOOD



A lightweight, rechargeable, hand-held work light that floods an entire work area with light. Includes an articulating head and features multiple attachment methods and the latest in dual C4® power LED technology.

LIGHT SOURCE: Dual C4® LEDs, with a 50,000 hour lifetime.

LENS: Unbreakable polycarbonate with silicone anti-scratch coating is assembled in a heavy-duty bezel. O-ring sealed.

BATTERY: Industrial rechargeable nickel-cadmium 4.8 volt, 1.8 amp hour, 4-cell sub-C battery can be recharged up to 1,000 times. Optional four "AA" alkaline non-rechargeable battery cartridge provides fast replacement with readily available batteries. Batteries are included in Alkaline model.

ON/OFF: Sonic welded push-button switch designed for extremely long life. A rubber dome push-button actuator provides easy operation even when wearing heavy gloves.

FEATURES: Full 360° rotating head with 210° of articulation. IPX4 rated for water-resistant operation. All openings O-ring sealed. 2 meter impact resistance tested. Removable magnet with 135 lb pull strength. Orange model comes with clip; integrated stowable hook on yellow and black models. Serialized for positive identification.



Optional 4 "AA" Alkaline Battery Cartridge



AIM IT ANYWHERE // WITH AN ARTICULATING HEAD.

Full 360° rotating head with 210° of articulation.

ATTACH IT TO STEEL // WITH ITS MAGNET.

CLIP IT ANYWHERE // WITH A SPRING-LOADED CLIP. (ORANGE MODEL)

Orange Model features a spring-loaded clip for convenient hands-free flood lighting.

HANG IT ANYWHERE // WITH AN INTEGRATED STOWABLE HOOK. (YELLOW & BLACK MODELS)



YELLOW	ORANGE	BLACK	
90627	90657	90607	with Charger/Holder and 120V AC & DC cords
90622	90661	90602	with 120V AC Charger/Holder
90626	-	90606	12V DC
90633	-	90613	with 120V AC/DC PiggyBack® Charger
90640	90670	90620	with 12V DC Fast Charger
90638	-	90618	with 120V AC Fast Charger PiggyBack® Charger
90621	90651	90601	without Charger
90642	90644	90641	Alkaline Model-Black/Hook

Orange model comes with Clip, Black & Yellow models come with Hook

SIZE: 9.2" x 2.85" x 2.75"
(23.4 x 7.2 x 7 cm)

NiCd WEIGHT: 1 lb 7.1 oz (655 g)

ALKALINE WEIGHT: 1 lb 2.3 oz (519 g)

COLOR: International Safety Orange, High-Visibility Yellow, or Black

	HIGH	LOW
LUMENS:	200	63
CANDELA:	1,150	350
DISTANCE:	68m	37m
RUN TIME:	3h 30m	16h

Moonlight mode: 20 days of continuous run time
Flash: 8 hours continuous time



Class I, Div. 2, Grps A, B, C, D,
Class II, Div. 2, Grps F, G
Class III T4

NFPA

Rack meets requirements of
1901-14.1.11.2 (2003)
mounted in any position

Battery Chargers:

- Steady Charge Plug-In Charger Holder
- Steady Charge PiggyBack® Charger
- AC Fast Charger (Includes Holder)
- AC PiggyBack® Fast Charger
- DC #1 Fast Charger (Includes Holder)
- DC #1 PiggyBack® Fast Charger
- DC #2 Fast Charger (Includes Holder)
- 120V AC Bank Charger
- 12V DC Bank Charger

Knucklehead

- 90010
- 90110
- 90011
- 90111
- 90012
- 90112
- 90013
- 90400
- 90401

Knucklehead Spot

- 90010
- 90110
- 90011
- 90111
- 90012
- 90112
- 90013
- 90400
- 90401



5 Unit bank Charger 120V



Fast Charger



10-hour Steady Charger Holder



PiggyBack® Charger

WHETHER YOU'RE WORKING ON THE FLOOR OR OVERHEAD, THE KNUCKLEHEAD IS YOUR PARTNER.

KNUCKLEHEAD® SPOT

The far-reaching beam of the Knucklehead Spot can help you locate hazards or victims from a distance. An articulating head gives firefighters more flexibility when working in situations with changing conditions.

LIGHT SOURCE: C4® LED, with a 50,000 hour lifetime.

LENS: Unbreakable polycarbonate with silicone anti-scratch coating is assembled in a heavy-duty bezel. O-ring sealed.

BATTERY: Industrial rechargeable nickel-cadmium 4.8 volt, 1.8 amp hour, 4-cell sub-C battery can be recharged up to 1,000 times. Optional four "AA" alkaline non-rechargeable battery pack provides fast replacement with readily available batteries. Batteries are included in Alkaline model.

ON/OFF: Sonic welded push-button switch designed for extremely long life. A rubber dome push-button actuator provides easy operation even when wearing heavy gloves.

FEATURES: Full 360° rotating head with 210° of articulation. IPX4 rated for water-resistant operation. All openings O-ring sealed. 2 meter impact resistance tested. Removable magnet with 135 lb pull strength and clip. Serialized for positive identification.

90757	120V AC/12V DC - Orange
90761	120V AC Fast Charge - Orange
90770	12V DC Fast Charge - Orange
90751	Light Only (without charger) Orange
90744	Alkaline Model - Orange - Blister



Spring-loaded clip attaches to turn-out gear for convenient hands-free lighting.



Powerful magnet adheres to steel surfaces. Full 360° rotating head with 210° of articulation.

	HIGH	LOW
LUMENS:	180	55
CANDELA:	11,000	3,300
DISTANCE:	210m	115m
RUN TIME:	3h 30m	16h

Moonlight mode: 20 days of continuous run time
Flash: 8 hours continuous time

SIZE: 9.2" x 2.85" x 2.75"
(23.4 x 7.2 x 7 cm)

NiCd WEIGHT: 1 lb 7.1 oz (655 g)

ALKALINE WEIGHT: 1 lb 2.3 oz (519 g)

COLOR: International Safety Orange



Class I, Div. 2, Grps A, B, C, D,
Class II, Div. 2, Grps F, G
Class III T3C

NFPA

Rack meets requirements of
1901-14.1.11.2 (2003)
mounted in any position



Optional 4 "AA"
Alkaline Battery
Cartridge



Alkaline
Battery Cartridge



Rechargeable
Battery Packs



Battery Cartridges:	Alkaline	Div. 2
Knucklehead	90542*	90338
Knucklehead Spot	90542*	90338

*Batteries not included

Charge Cords for:	12V Cig	12V DC	120AC
Knucklehead	22051	22050	22311
Knucklehead Spot	22051	22050	22311



SAFETY-RATED SERIES.

// STREAMLIGHT GIVES YOU MORE SAFETY-RATED LIGHTS FOR MORE OPTIONS IN HAZARDOUS LOCATIONS.

Streamlight flashlights are tested and approved by the world's leading independent laboratories – including Underwriters Laboratories, ATEX, Demko, and the Mine Safety and Health Administration (MSHA). This testing is your assurance that the Streamlight flashlight you choose will be safe in the environment(s) in which you'll be using it.



POLYSTINGER® LED HAZ-LO® 3N PROPOLYMER® LED



// DIFFERENT LIGHTS FOR DIFFERENT HAZARDOUS LOCATIONS.

The National Electric Code (NEC) defines hazardous locations by "class" and "division." There are three classes:



CLASS I locations are made hazardous by the presence of flammable gases, liquids or vapors.



CLASS II locations are hazardous because combustible dusts are present.



CLASS III locations contain easily ignitable fibers or flyings.

The "Division" designation refers to the likelihood that ignitable concentrations of flammable materials are present. There are two divisions:



DIVISION 1 designates an environment where ignitable concentrations of flammable gases, liquids, vapors or dusts can exist some of the time or all of the time under normal operating conditions, or where easily ignitable fibers and flyings are manufactured, handled or used.



DIVISION 2 locations are where ignitable concentrations are not likely to exist under normal operating conditions or where Class 3 materials are stored or handled.

Hazardous classes are further defined by "groups" based on the physical properties of their combustible materials. These groups include (but are not limited to):



- GROUP A** Acetylene
- GROUP B** Hydrogen
- GROUP C** Ethylene, carbon monoxide
- GROUP D** Propane, gasoline, naphtha, benzene, butane, ethyl alcohol, acetone, methane



- GROUP E** Metals including aluminum, magnesium (Div. 1 only)
- GROUP F** Carbonaceous dusts including coal, carbon black, coke
- GROUP G** Dusts not included in E and F including wood, plastics, flour, starch or grain dusts



3AA PROPOLYMER®
HAZ-LO®

4AA PROPOLYMER®
LED

4AA PROPOLYMER®
LUX

4AA PROPOLYMAX®
LED

3C PROPOLYMER®
HAZ-LO®

3C PROPOLYMER®
LED



3AA HAZ-LO®



STYLUS®



STYLUS REACH®

// STREAMLIGHT'S HAZ-LO LIGHTS - 2 STANDARDS PROVIDE DIFFERENT PATHS TO THE SAME RESULT: A DIVISION 1 RATING!

When working in a Division 1 area, we expect explosive atmospheres to be present. Streamlight's HAZ-LO product line is suitable for use in Division 1 areas. Streamlight uses different protection standards and testing at Nationally Recognized Test Labs (NRTL) to achieve the Division 1 rating that is common to all Streamlight HAZ-LO Lighting. This is the best possible performance while ensuring that your flashlight will not become an ignition source. ANSI/UL 783 is the specific standard for flashlights used in hazardous locations. ANSI/UL 913 is the intrinsically safe standard for general electronic equipment. While either standard can direct certification to Division 1 level, it is important to note Class, Group and Temperature code requirements to select the correct flashlight for specific applications.



// WHY ARE SAFETY RATINGS IMPORTANT?

There are several types of locations in which it can be extremely dangerous to use any light that has not been specifically designed – and approved – for that kind of location. These are areas where fire or explosion hazards may exist due to the presence of flammable gases, liquids, vapors, dusts, or ignitable fibers or flyings. If you will be using a flashlight in any potentially hazardous location, it is critical that your light be safety-rated for that specific kind of environment.

// ATEX RATINGS

Streamlight also offers safety-rated lights which comply with the European Union (EU) Directive 94/9/EC (ATEX) for products intended for use in potentially explosive atmospheres within the EU member countries. Please visit our web site (www.streamlight.com) for more information on ATEX-rated products. We also have a catalog of ATEX-rated products available upon request.

NON-RECHARGEABLE

PROPOLYMER SERIES

// PERFORMANCE.PERIOD.



2AA PROPOLYMER[®] LED

Impact and shock resistant LED flashlight that provides 20 hours of run time.

67101	with alkaline batteries-Clam packaged-Yellow
67100	with alkaline batteries-Clam packaged-Black
68271	Global Mount Kit



Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Group F&G;
Class III, T4



Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Group F&G;
Class III, T4



SIZE: 6.3" x 1.3" x .89"
(16 x 3.3 x 2.26 cm)
WEIGHT: 3.6 oz (100 g)
COLOR: Yellow or Black

LUMENS:	20
CANDELA:	2,300
DISTANCE:	96m
RUN TIME:	20h



Rubber
Helmet
Strap



"N" Cell Batteries

Accessory Name	2AA LED ProPolymer	3N LED ProPolymer
Rubber Helmet Strap	99075	-
Red Safety Wand	74903	-
Yellow Safety Wand	74904	-
Glow-In-The-Dark Safety Wand	74913	-
Nylon Holster	85905	-
Gallet (F1S, F1SF, FS2) Mount Kit	68130	-
Global Mount Kit	68271	-
"N" Cell batteries-6 pack	-	64030

"MY 4AA PROPOLYMER MELTED & MUTATED. BUT IT STILL WORKS!"

Your flashlights are amazing! I was using a 4AA Propolymer along with a torch for preheating. The light got too close to the torch; and, as you can see by the pictures, the torch melted the flashlight ... but it still works! Thanks and please continue making great durable products.

*Jason Palmer
Alberta, Canada*

3N PROPOLYMER[®] LED



Intrinsic Safety for Haz. Loc.
Class I, II, Div. 1, Groups A,B,C,D,E,F,G;
Class III, T4A Classified



Intrinsic Safety for Haz. Loc.
Exia Class I, II, Div. 1, Groups A,B,C,D,E,F,G;
Class III, T4A Exia

Extremely lightweight, alkaline battery-powered personal light features three ultra-bright LEDs.

LIGHT SOURCE: 100,000 hour life LEDs.

LENS: Unbreakable polycarbonate lens with scratch resistant coating.

BATTERY: Three "N" size alkaline batteries.

ON/OFF: Features momentary blink or constant on tail switch.

FEATURES: Features an integral pocket clip. Intrinsically safe.

62202	with White LEDs and alkaline batteries—Clam packaged—Yellow
62302	with White LEDs and alkaline batteries—Clam packaged—Black
62212	with Blue LEDs and alkaline batteries—Clam packaged—Yellow

SIZE: 5.25" x .96" x .69"
(13.33 x 2.44 x 1.75 cm)

WEIGHT: 2.1 oz (59.54 g)

COLOR: Yellow or Black

LUMENS:	30
RUN TIME:	120h

3AA PROPOLYMER[®] HAZ-LO[®]



Class I, Div 1, Groups A, B, C, D;
Class II, Div. 1, Groups E, F, G;
Class III, T4 Exia

It's the premier light in our Propolymer series. With the strongest blend of performance and safety ratings, 120 lumens of high output, a strong beam and a body that is resistant to chemicals and solvents, this high-performance, light works in tough demanding environments.

LIGHT SOURCE: C4[®] LED, impervious to shock with a 50,000 hour lifetime.

LENS: Unbreakable polycarbonate lens with scratch resistant coating.

BATTERY: Three "AA" size alkaline batteries.

ON/OFF: Push button tail switch provides one handed momentary or constant operation.

FEATURES: The 3 alkaline battery design reduces costs by 25%! 3 meter impact resistance tested. IP67 rated for dust-tight and waterproof to 1 meter for 30 minutes; IPX4 for water spray. Anti static and non-conductive. Integrated and retained facecap lock. Corrosion proof. Deep parabolic reflector produces long range brilliance and smooth uniform beam pattern. Electronically regulated.

SIZE: 7.0" x 1.05" x 1.50"
(17.78 x 2.67 x 3.81 cm)

WEIGHT: 7.5 oz (213 g)

COLOR: Yellow, Black or Orange

LUMENS:	120
CANDELA:	14,000
DISTANCE:	237m
RUN TIME:	6h 30m

YELLOW	BLACK	ORANGE	
68720	68721	68722	3AA ProPolymer HAZ-LO with alkaline batteries - Blister
68723	68724	-	3AA ProPolymer HAZ-LO with alkaline batteries - Box
68270	-	-	Helmet Lighting Kit- 3AA Propolymer Haz-lo with white LED, alkaline batteries, helmet mount, helmet band, clam packaged

3AA PROPOLYMER HAZ-LO ACCESSORIES

68085	Helmet Mount Kit
68086	Gallet Helmet Mount Kit
72024	Lanyard with Push Button Slide



NON-RECHARGEABLE

PROPOLYMER SERIES

// PERFORMANCE.PERIOD.

4AA PROPOLYMER[®] LED



Impact-and shock-resistant LED projects a soft, diffused wide area of light and provides 155 hours of run time.

YELLOW	BLACK	
68202	68302	with White LEDs and alkaline batteries—Clam packaged
68212	—	with Blue LEDs and alkaline batteries—Clam packaged
68201	68301	with White LEDs and alkaline batteries—in box
68200	68300	with White LEDs without alkaline batteries—in box

SIZE: 6.5" x 1.63" x 1.34"
(16.51 x 4.14 x 3.4 cm)
WEIGHT: 6.3 oz (178.6 g)
COLOR: Yellow or Black

LUMENS: 67
RUN TIME: 155h



Class I, Div. 1, Groups C, D;
Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F&G;
Class III, T3C



Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F&G;
Class III, T3C



Permissible Flashlight
App. No. 10C-658-0
Tested for use in methane-air
mixtures only

4AA PROPOLYMER[®] LUX



Provides a longer reaching, brighter beam.
Ergonomically shaped for maximum hand comfort.

YELLOW	BLACK	
68244	68344	4AA Lux Div. 2 with alkaline batteries—Clam packaged
68602	68702	4AA Lux Div. 1 with alkaline batteries—Clam packaged

SIZE: 7" x 1.35" x 1.69"
(17.8 x 3.43 x 4.29 cm)
WEIGHT: 7.6 oz (216 g)
COLOR: Yellow or Black

LUMENS: 100
CANDELA: 4,200
DISTANCE: 130m
RUN TIME: 6h

4AA Lux Div. 1



Class I & II, Div. 1, Groups C, D, F & G;
Class I, Div. 2, Groups A, B, C, D;
Class III, T4



Class I & II, Div. 1, Groups C, D, F & G;
Class III, T4 Exia
Non-incendive:
Class I, Div. 2, Groups A, B, C, D



Permissible Flashlight
App. No. 20-A060002-0
Tested for use in methane-air
mixtures only

4AA Lux Div. 2



Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F&G;
Class III, T3C (142 C)



Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F&G;
Class III, T3C (142 C)

NFPA

Meets requirements of
NFPA 1971-8.6 (2007);
500° heat resistance test



Safety Wands



Gallet Helmet Mount



Helmet Mount



Accessory Name	4AA LED ProPolymer	4AA Lux ProPolymer
Yellow Safety Wand	75904	75904
Red Safety Wand	75903	75903
Blue Safety Wand	75902	75902
White Safety Wand	75908	75908
Glow-In-The-Dark Safety Wand	75913	75913
Nylon Hoster	68905	68905
Helmet Mount	68269	68269
Global Mount Kit	68271	68271



4AA PROPOLYMAX



It's the brightest light in our ProPolymer® series, with 300 lumens of high-output and a body that's resistant to chemicals and solvents. Take this high-performance, programmable light to work in tough, demanding environments, and you'll have a high-performance partner at your side.

LIGHT SOURCE: C4® LED, with a 50,000 hour lifetime.

LENS: Unbreakable polycarbonate lens with scratch-resistant coating.

BATTERY: Four "AA" size alkaline batteries.

ON/OFF: Multi-function, push-button tactical tailswitch. One handed operation of momentary, variable intensity or strobe mode. TEN-TAP™ programmable switch allows user selection of one of three different programs: high/low/strobe (factory default), high only or low/high.

FEATURES: 3 meter impact resistance tested. IP67 rated for dust-tight and waterproof to 1 meter for 30 minutes; IPX4 for water spray. Non-conductive and corrosion proof. TEN-TAP™ programmable switch allows user to select one of three different programs. Deep parabolic reflector produces long range brilliance and smooth uniform beam pattern. Electronically regulated.

- 68820 with alkaline batteries - Blister - Yellow
- 68821 with alkaline batteries - Blister - Black
- 68822 with alkaline batteries - Blister - Orange

4AA PROPOLYMAX ACCESSORIES

- 68088 Belt Clip - fits 4AA ProPolymax
- 68089 Poly Mount Kit - universal mounting via MSA V-Gard slot or self-adhesive mount



SIZE: 7" x 1.05" x 1.5"
(17.78 x 2.67 x 3.81 cm)

WEIGHT: 8.2 oz (233 g)

COLOR: Yellow, Black or Orange

	HIGH	LOW
LUMENS:	300	50
CANDELA:	17,000	2,500
DISTANCE:	261m	100m
RUN TIME:	2h 45m	24h



Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F&G;
Class III, T4



Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F&G;
Class III, T4



Belt Clip



Poly Mount Kit

Belt Clip

NON-RECHARGEABLE

PROPOLYMER SERIES

// PERFORMANCE.PERIOD.



3C PROPOLYMER[®] LED



Impact-and shock-resistant LED flashlight projects a soft diffused wide area of light and provides 336 hours of run time.

- 33202 with White LEDs without alkaline batteries—Clam packaged—Yellow
- 33302 with White LEDs without alkaline batteries—Clam packaged—Black



Permissible Flashlight
App. No. 10C-658-0
Tested for use in methane-air mixtures only



Class I, Div. 1, Group D;
Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F&G;
Class III, T3C



Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F&G;
Class III, T3C



SIZE: 8.55" x 1.95" x 1.48"
(21.72 x 4.95 x 3.76 cm)

WEIGHT: 13.5 oz (382.73 g)

COLOR: Yellow or Black

LUMENS:	85
RUN TIME:	336h

THE PROPOLYMER SERIES IS ALWAYS
READY FOR
HAZARDOUS DUTY.

3C PROPOLYMER® HAZ-LO®



The 3C Propolymer® HAZ-LO® is an intrinsically safe, high performance, 3 "C" Alkaline powered C4® LED flashlight that carries a strong beam. It features a tail switch for momentary or constant on operation, integrated & retained facecap lock and module polarity protection. The body is constructed of an engineering polymer resin that is virtually indestructible, shock resistant, anti static, non-conductive and light weight.

LIGHT SOURCE: C4® LED , impervious to shock with a 50,000 hour lifetime.

LENS: Unbreakable polycarbonate lens with scratch-resistant coating.

BATTERY: Three "C" size alkaline batteries.

ON/OFF: Push button tail switch provides one handed momentary or constant operation.

FEATURES: 3 meter impact resistance tested. IP67 rated for dust-tight and waterproof to 1 meter for 30 minutes; IPX4 for water spray. Anti static and non-conductive. Integrated and retained facecap lock. Corrosion proof Deep parabolic reflector produces smooth uniform beam pattern. Electronically regulated.



SIZE: 9.3" x 1.46" x 2.08"
 (23.62 x 3.71 x 5.28 cm)

WEIGHT: 13.9 oz (394 g)

COLOR: Yellow or Orange

LUMENS: 150

CANDELA: 7,000

DISTANCE: 167m

RUN TIME: 18h

33820 3C ProPolymer HAZ-LO - Yellow
 33822 3C ProPolymer HAZ-LO - Orange



Class I, Div 1, Groups A, B, C, D T4;
 Class II, Div. 1, Groups E, F, G;
 Class III, T4 Classified



Class I, Div 1, Groups A, B, C, D T4;
 Class II, Div. 1, Groups E, F, G;
 Class III, T4 Exia

TACTICAL WEAPONS-MOUNTED SERIES

// PERFORMANCE.PERIOD.

USE THIS EASY COMPARISON CHART TO CHOOSE THE BEST LIGHT FOR YOU BASED ON THE FEATURES THAT YOU NEED!


LUMENS
CANDELA/REACH
RUN TIME
MSRP

BEAM STYLE

SPECS

HIGH MODE PERFORMANCE SHOWN.
FOR PERFORMANCE IN OTHER
MODES, SEE MODEL PAGES.

TLR-1 HL®




OUTPUT: 630 lumens
INTENSITY: 12,000 candela
DISTANCE: 219 meters
RUN TIME: 1 hour 15 min
SIZE: 3.39" x 1.47" x 1.44"
(8.61 x 3.73 x 3.65 cm)
WEIGHT: 4.18 oz (118.6 g)
COLOR: Black

HL SERIES

TLR-2 HL®


Red Laser



OUTPUT: 630 lumens
INTENSITY: 12,000 candela
DISTANCE: 219 meters
RUN TIME: 1 hour 15 min
SIZE: 3.39" x 1.47" x 1.83"
(8.61 x 3.73 x 4.64 cm)
WEIGHT: 4.78 oz (135.5 g)
COLOR: Black

HL SERIES


TLR-1 HP® TLR-1s HP®



OUTPUT: 200 lumens
INTENSITY: 46,000 candela
BEAM DISTANCE: 429 meters
RUN TIME: 1 hour 45 min
SIZE: 4.83" x 1.44" x 2.2"
(12.27 x 3.66 x 5.59 cm)
WEIGHT: 5.3 oz (150.3 g)
COLOR: Black

HP SERIES

TLR-1® TLR-1s®





OUTPUT: 300 lumens
INTENSITY: 12,000 candela
BEAM DISTANCE: 219 meters
RUN TIME: 2 hours 30 min
SIZE: 3.39" x 1.47" x 1.44"
(8.61 x 3.73 x 3.65 cm)
WEIGHT: 4.18 oz (118.6 g)
COLOR: Black



















TRADITION

TLR-2® TLR-2s®

Red Laser



OUTPUT: 300 lumens
INTENSITY: 12,000 candela
BEAM DISTANCE: 219 meters
RUN TIME: 2 hours 30 min
SIZE: 3.39" x 1.47" x 1.83"
(8.61 x 3.73 x 4.64 cm)
WEIGHT: 4.72 oz (133.8 g)
COLOR: Black

	LUMENS CANDELA/REACH RUN TIME MSRP	BEAM STYLE	SPEEDS HIGH MODE PERFORMANCE SHOWN. FOR PERFORMANCE IN OTHER MODES, SEE MODEL PAGES.	
TLR-VIR[®] White LED/Infrared LED 			OUTPUT: 300 lumens IR OUTPUT: 1,000mW/sr INTENSITY: 12,000 candela RUN TIME: 2 hours 30 min IR RUN TIME: 20 hours SIZE: 3.82" x 1.47" x 2.03" <small>(9.7 x 3.73 x 5.16 cm)</small> WEIGHT: 6.0 oz (170 g) COLOR: Black	TRADITION
TLR-1[®] GAME SPOTTER[™] Green LED 			OUTPUT: 160 lumens INTENSITY: 31,000 candela BEAM DISTANCE: 352 meters RUN TIME: 1 hour 45 min SIZE: 4.83" x 1.44" x 2.2" <small>(12.27 x 3.66 x 5.59 cm)</small> WEIGHT: 5.6 oz (158.8 g) COLOR: Black	TRADITION
TLR-2[®] G Green Laser 			OUTPUT: 200 lumens INTENSITY: 6,300 candela BEAM DISTANCE: 159 meters RUN TIME: 2 hours 15 min SIZE: 3.39" x 1.47" x 1.83" <small>(8.61 x 3.73 x 4.64 cm)</small> WEIGHT: 4.58 oz (130 g) COLOR: Black	HP SERIES
TLR-3[®] 			OUTPUT: 125 lumens INTENSITY: 5,000 candela RUN TIME: 1 hour 30 min SIZE: 2.71" x 1.18" x 1.51" <small>(6.88 x 3 x 3.84 cm)</small> WEIGHT: 2.32 oz (65.8 g) COLOR: Black	TRADITION
TLR-4[®] Red Laser 			OUTPUT: 125 lumens INTENSITY: 5,000 candela RUN TIME: 1 hour 30 min SIZE: 2.73" x 1.2" x 1.99" <small>(6.93 x 3.05 x 5.05 cm)</small> WEIGHT: 2.81 oz (79.7 g) COLOR: Black	TRADITION
TLR-4[®] G Direct Drive Green Laser 			OUTPUT: 115 lumens INTENSITY: 5,200 candela RUN TIME: 1 hour 45 min SIZE: 2.73" x 1.2" x 1.99" <small>(6.93 x 3.05 x 5.05 cm)</small> WEIGHT: 2.81 oz (79.7 g) COLOR: Black	TRADITION

NON-RECHARGEABLE

TACTICAL WEAPONS-MOUNTED SERIES

// PERFORMANCE.PERIOD.



TLR-1 HL®

HL® **LED** With **[(STROBE)]**
Double tap tailswitch to activate.



HL SERIES

SIZE: 3.39" x 1.47" x 1.44"
(8.61 x 3.73 x 3.65 cm)
WEIGHT: 4.18 oz (118.6 g)
COLOR: Black

LUMENS: 630
CANDELA: 12,000
DISTANCE: 219m
RUN TIME: 1h 15m

See more of what's all around you. Be safer. The 630 lumens wide beam pattern gives you added peripheral vision. A strobe is also included for signaling and disorienting.

LIGHT SOURCE: C4® LED technology, with a 50,000 hour lifetime.

LENS: Unbreakable polycarbonate lens with scratch-resistant coating. Gasket sealed.

BATTERY: Two 3 Volt "CR123A" lithium batteries, with a storage life of ten years.

ON/OFF: Standard Switch: Ambidextrous momentary/steady On-Off. Double tap of momentary paddle within 0.4 seconds activates strobe. Strobe can be disabled.

FEATURES: One handed snap-on/tighten interface keeps hands away from muzzle when attaching/detaching. Mounts directly to long guns with MIL-STD-1913 (Picatinny) rails. Extensively live-fire tested. Impact resistant construction. Operating temperature: -40°F to +120°F. IPX7 rated design; waterproof to 1 meter for 30 minutes.

69260 Includes Rail Locating Keys for Glock style, 1913 Picatinny, S&W 99/TSW, and Beretta 90two. Lithium batteries. Boxed. Black.

Remote system accessories available are featured on Page 49.

TLR-2 HL®

HL® **LED** With **[(STROBE)]**
Double tap tailswitch to activate.



HL SERIES

SIZE: 3.39" x 1.47" x 1.83"
(8.61 x 3.73 x 4.64 cm)
WEIGHT: 4.78 oz (135.5 g)
COLOR: Black

LUMENS: 630
CANDELA: 12,000
DISTANCE: 219m
RUN TIME: 1h 15m

The TLR-2 HL has the same 630 lumens, wide beam pattern and strobe as the TLR-1 HL, but it also comes equipped with a red laser to guide your aim.

LIGHT SOURCE: C4® LED, with a 50,000 hour lifetime and a 640-660nm red laser.

LENS: Unbreakable polycarbonate lens with scratch-resistant coating. Gasket sealed.

BATTERY: Two 3 Volt "CR123A" lithium batteries, with a storage life of ten years.

ON/OFF: Standard Switch: Ambidextrous momentary/steady On-Off. Double tap of momentary paddle within 0.4 seconds activates strobe.

FEATURES: One handed snap-on/tighten interface keeps hands away from muzzle when attaching/detaching. Mounts directly to long guns with MIL-STD-1913 (Picatinny) rails. Extensively live-fire tested. Impact resistant construction. Operating temperature: -40°F to +120°F. IPX4 rated design for water resistant operation.

69261 Includes Rail Locating Keys for Glock style, 1913 Picatinny, S&W 99/TSW, and Beretta 90two. Lithium batteries. Boxed. Black.

Remote system accessories available are featured on Page 49.

LONG OR WIDE THE TLR HL/HP SERIES COVERS YOU.

TLR-1 HP®



*shown with
remote switch
backplate.*

SIZE: 5.25" x 1.44" x 2.2"
(13.34x 3.66 x 5.59 cm)

WEIGHT: 5.6 oz (158.8 g)

COLOR: Black

HP SERIES

LUMENS:	200
CANDELA:	46,000
DISTANCE:	429m
RUN TIME:	1h 45m

Designed for long-guns, the TLR-1 HP is a super-charged, high-power light with extreme blinding brightness and long-range beam. There is simply no other rail-mountable light with power like this at a comparable price.

LIGHT SOURCE: C4® LED, with a 50,000 hour lifetime.

LENS: Unbreakable polycarbonate lens with scratch-resistant coating. O-ring sealed.

BATTERY: Two 3 Volt "CR123A" lithium batteries, with a storage life of ten years.

ON/OFF: Standard Switch: Ambidextrous momentary/steady On-Off. Remote Switch: Momentary/steady On-Off and port plug for remote switch assembly. Double tap of momentary paddle within 0.4 seconds activates strobe. (TLR-1s HP only).

FEATURES: One handed snap-on/tighten interface keeps hands away from muzzle when attaching/detaching. Mounts directly to long guns with MIL-STD-1913 (Picatinny) rails. Extensively live-fire tested. Impact resistant construction. Operating temperature: -40°F to +120°F. IPX7 rated design; waterproof to 1 meter for 30 minutes. Strobe mode (TLR-1s HP only).

69217	Standard. Includes Rail Locating Keys for Glock style, 1913 Picatinny, S&W 99/TSW, and Beretta 90two. Lithium batteries. Boxed. Black.
69218	Remote. Includes Rail Locating Keys for Glock style, 1913 Picatinny, S&W 99/TSW, and Beretta 90two. Remote switch and Lithium batteries. Boxed. Black.

TLR-1s HP®



*shown with
standard switch
backplate.*

SIZE: 4.83" x 1.44" x 2.2"
(12.27x 3.66 x 5.59 cm)

WEIGHT: 5.3 oz (150.3 g)

COLOR: Black

HP SERIES

LUMENS:	200
CANDELA:	46,000
DISTANCE:	429m
RUN TIME:	1h 45m

The same great features as a TLR-1 HP, the TLR-1s HP is a long range, high-power weapon light with strobe.

69215	Standard. Includes Rail Locating Keys for Glock style, 1913 Picatinny, S&W 99/TSW, and Beretta 90two. Lithium batteries. Boxed. Black.
69216	Remote. Includes Rail Locating Keys for Glock style, 1913 Picatinny, S&W 99/TSW, and Beretta 90two. Remote switch and Lithium batteries. Boxed. Black.

Remote system accessories available are featured on Page 49.



NON-RECHARGEABLE

TACTICAL WEAPONS-MOUNTED SERIES

// PERFORMANCE.PERIOD.

TLR-1 // TLR-1's



These intensely bright, incredibly durable tactical lights come in standard and strobe (TLR-1 S) models. An IR model is also available.

LIGHT SOURCE: C4® LED, with a 50,000 hour lifetime.

IR illuminator: High Power IR LED, 850 nm, impervious to shock with a 20,000 hour lifetime.

LENS: High-temperature, shock-mounted, impact-resistant Borofloat glass.

BATTERY: Two 3 Volt "CR123A" lithium batteries, with a shelf life of ten years.

ON/OFF: Three position Mode Selector switch. Ambidextrous momentary/steady on/off switch.

FEATURES: One-handed snap-on and tighten interface keeps hands away from muzzle when attaching/detaching. Tethered battery door and latch mechanism prevent battery door loss while providing easy battery replacement. Securely fits a broad range of weapons. Mounts directly to handguns with Glock-style rails and to all MIL-STD-1913 (Picatinny) rails. Extensively live-fire tested impact resistant construction. Windage and elevation adjustment screws mounted in brass bushings for long life and dependable zero retention. Highly accurate sight repeatability when remounting. Operating temperature: -40°F to +120°F. IPX7 rated design; waterproof to 1 meter for 30 minutes.

TRADITION

SIZE: 3.39" x 1.47" x 1.44"
(8.61 x 3.73 x 3.65 cm)
WEIGHT: 4.18 oz (118.6 g)
COLOR: Black

LUMENS:	300
CANDELA:	12,000
DISTANCE:	219m
RUN TIME:	2h 30m

69110	Includes Rail Locating Keys for Glock style, 1913 Picatinny, S&W 99/TSW, and Beretta 90two-lithium batteries-Boxed-Black
69150	IR Includes Rail Locating Keys for Glock style, 1913 Picatinny, S&W 99/TSW, and Beretta 90two-lithium batteries. Boxed-Black
69210	Strobe Includes Rail Locating Keys for Glock style, 1913 Picatinny, S&W 99/TSW, and Beretta 90two-lithium batteries. Boxed-Black

TLR-2 // TLR-2's



The same great features as the TLR-1 lights with an integrated red laser for accurate aiming. Strobe (S) and IR models are available.

LIGHT SOURCE: C4® LED, with a 50,000 hour lifetime and a 650-660nm red laser.

IR illuminator: High Power IR LED, 850 nm, impervious to shock with a 20,000 hour lifetime.

LENS: High-temperature, shock-mounted, impact-resistant Borofloat glass.

BATTERY: Two 3 Volt "CR123A" lithium batteries, with a shelf life of ten years.

ON/OFF: Ambidextrous momentary/steady on/off switch. Three position Mode Selector switch (Laser only, LED Illumination only, both). Double-tap of momentary paddle within .4 seconds activates strobe. (TLR-2's only).

FEATURES: One-handed snap-on and tighten interface keeps hands away from muzzle when attaching/detaching. Tethered battery door and latch mechanism prevent battery door loss while providing easy battery replacement. Securely fits a broad range of weapons. Mounts directly to handguns with Glock-style rails and to all MIL-STD-1913 (Picatinny) rails. Extensively live-fire tested impact resistant construction. Windage and elevation adjustment screws mounted in brass bushings for long life and dependable zero retention. Highly accurate sight repeatability when remounting. Operating temperature: -40°F to +120°F. IPX4 rated design for water-resistant operation.

TRADITION

SIZE: 3.39" x 1.47" x 1.83"
(8.61 x 3.73 x 4.64 cm)
WEIGHT: 4.72 oz (133.8 g)
COLOR: Black

LUMENS:	300
CANDELA:	12,000
DISTANCE:	219m
RUN TIME:	2h 30m

69120	with Laser Sight Includes Rail Locating Keys for Glock style, 1913 Picatinny, S&W 99/TSW, and Beretta 90two-lithium batteries-Boxed-Black
69160	IR w/ Laser Sight Includes Rail Locating Keys for Glock style, 1913 Picatinny, S&W 99/TSW, and Beretta 90two-lithium batteries-Boxed-Black
69230	Strobe w/ Laser Sight Includes Rail Locating Keys for Glock style, 1913 Picatinny, S&W 99/TSW, and Beretta 90two-lithium batteries-Boxed-Black

DURABILITY, POWER, LONG-RUNNING.

ADVANTAGE: TLR TACTICAL LIGHTS



TLR-1®, TLR-2®, TLR-1® HP, TLR-1® GAMESPOTTER® REMOTES

**includes two screws, tie wrap, double stick tape and retaining clips - requires remote door assembly*

69134-Shotgun coil remote switch

69135-Long gun remote switch

69132-Remote tape switch

AR15/M16 Mount

H&K USP Compact & Full Size Adapter

TLR 12 ga. Mag Tube

Remington 870

Ambidexterous TLR Vertical Grip with Rail

CR123A Lithium Batteries

Remote Switch Retaining Clips for Picatinny Rail

TLR 1 & 2 Rail Locating Key Kit

Holsters TLR-1, TLR-2

TLR-1 & 2 Colored & Infrared Lenses



69130-Battery door/switch with integrated remote connector



69161-Battery door/switch features a "locked off" position to prevent accidental light actuation

TLR ACCESSORIES:

Accessory Name	
H&K USP Mount - Full Size	69085
Remington 870 Mount	69906
TLR 12 ga. Mag Tube Mount	69901
AR15/M16 Mount	69902
H&K Compact	69091
Colored Flip Lens - Red	69115
Colored Flip Lens - Blue	69116
Colored Flip Lens - Green	69117
Infrared Lens	69118
TLR Rail Locating Kit	69175
Ambidexterous Vertical Grip with Rail	69114
Contour Remote	69300
Remote Retaining Clip	88178
Remote Door/Switch Assy	69130
Remote Door/Switch Assy - "Lock Off"	69161
Remote Tape Switch, Straight	69132
Remote Pressure Switch, Coil	69134
Remote Pressure Switch, Straight	69135
Holster	69202
CR123A Li Batteries - 2 Pack	85175
CR123A Li Batteries - 6 Pack	85180
CR123A Li Batteries - 12 Pack	85177
CR123A Li Batteries - 400 Pack	85179

NON-RECHARGEABLE

TACTICAL WEAPONS-MOUNTED SERIES

// PERFORMANCE.PERIOD.

DURABILITY, POWER, LONG-RUNNING.

ADVANTAGE: TLR TACTICAL LIGHTS

TLR-VIR®

The TLR-VIR® gives you two sources of light, visible and IR. Switch from the long reaching, bright white, C4®-powered LED to the infrared LED via your remote switch or paddle switch on the back door. With an easy-access strobe, you're ready for anything.

C4® LED With **(STROBE)**
Double tap tailswitch to activate.



TRADITION

SIZE: 3.82" x 1.47" x 2.03"
(9.7 x 3.73 x 5.16 cm)
WEIGHT: 6.0 oz (170 g)
COLOR: Black

LUMENS: 300
CANDELA: 12,000
IR OUTPUT: 1000mW/sr
RUN TIME: 2h 30m
IR RUN TIME: 20h

ILLUM. SOURCE: Visible: C4® LED, impervious to shock with a 50,000 hour lifetime. Infrared: LED emitter, 850 nm, impervious to shock with a 20,000 hour lifetime.

LENS: High-temperature, shock-mounted, impact-resistant Borofloat glass.

BATTERY: Two (2) 3 Volt CR123A lithium batteries, with a shelf life of ten years.

ON/OFF: Momentary/steady on/off switch with plug port for remote switch. Three-position Mode Selector switch (IR Illumination, Safe OFF, Visible Illumination). IR Illumination mode selection tactile indicator on housing.

FEATURES: Visible C4® LED and IR LED. Tactile indicator on IR LED housing identifies IR Illumination position. One-handed snap-on and tighten interface keeps hands away from muzzle when attaching/detaching. The illuminator securely fits all long guns with MIL_STD-1913 rails, such as an M16, M4 or SCAR platforms, as well as M240 and M249 machine guns. Extensively live-fire tested impact resistant construction. Operating temperature: -40°F to +140°F. IPX7 rated design; waterproof to 1 meter for 30 minutes. User programmable strobe enable/disable.

69180 with lithium batteries

Accessory Name

Remington 870 Mount	69906
TLR 12 ga. Mag Tube Mount	69901
AR15/M16 Mount	69902
Colored Flip Lens-Red	69115
Colored Flip Lens-Blue	69116
Colored Flip Lens-Green	69117
Infrared Lens	69118
TLR Rail Locating Kit	69175
Ambidexterous Vertical Grip with Rail	69114
Remote Retaining Clip	88178
Remote Door/Switch Assy	69130
Remote Tape Switch, Straight	69132
Remote Pressure Switch, Coil	69134
Remote Pressure Switch, Straight	69135
CR123A Li Batteries-2 Pack	85175
CR123A Li Batteries-6 Pack	85180
CR123A Li Batteries-12 Pack	85177
CR123A Li Batteries-400 Pack	85179

Rail Locating Key Kit



Remote Switches* -long gun only

*includes two screws, tie wrap, double stick tape and retaining clips-requires remote door assembly.



Ambidexterous TLR Vertical Grip with Rail



Remote Door
-long gun only

TLR-2® IRW

C4® LED With **[(STROBE)]**
Double tap tailswitch to activate.



TRADITION
NEW FOR '14

SIZE: 3.39" x 1.47" x 1.83"
(8.61 x 3.73 x 4.64 cm)
WEIGHT: 4.72 oz (133.8 g)
COLOR: Black

LUMENS: 300
CANDELA: 12,000
IR OUTPUT: Less than .8mW
DISTANCE: 219m
RUN TIME: 2h 30m
Laser mode: 45+ hours of run time

Ideal for target acquisition, the TLR-2 IRW features a Class 1 "Eye Safe" IR laser and 300 lumens of visible, blinding white light.

LIGHT SOURCE: C4® LED, with a 50,000 hour lifetime. IR Laser: 850 nm.
LENS: High-temperature, shock-mounted, impact-resistant Borofloat glass.
BATTERY: Two 3 Volt "CR123A" lithium batteries, with a shelf life of ten years.
ON/OFF: Ambidextrous momentary/steady on/off switch. Three position Mode Selector switch (White light only, Safe OFF, IR Laser only). Double tap of momentary paddle within 0.4 seconds activates white light strobe.
FEATURES: One-handed snap-on and tighten interface keeps hands away from muzzle when attaching/detaching. Securely fits a broad range of weapons. Mounts directly to handguns with Glock-style rails and to all MIL-STD-1913 (Picatinny) rails. Extensively live-fire tested impact resistant construction. Windage and elevation adjustment screws mounted in brass bushings for long life and dependable zero retention. Highly accurate sight repeatability when remounting. Operating temperature: -40°F to +120°F. IPX4 rated design for water-resistant operation. Strobe can be disabled.

69165 with lithium batteries

TLR-3®

This ultra-compact, superbright light is designed for sub-compact and compact weapons, yet it fits the broadest array of handguns on the market - all the way up to full-size.



TRADITION

SIZE: 2.71" x 1.18" x 1.51"
(6.88 x 3 x 3.84 cm)
WEIGHT: 2.32 oz (65.8 g)
COLOR: Black

LUMENS: 125
CANDELA: 5,300
RUN TIME: 1h 30m

LIGHT SOURCE: C4® LED, with a 50,000 hour lifetime.

LENS: Borofloat high-temperature glass.

BATTERY: One 3 Volt "CR2" lithium battery, with a shelf life of ten years.

ON/OFF: Ambidextrous momentary/steady on/off switch.

FEATURES: Ultra-lightweight and compact. One-handed snap-on and tighten interface keeps hands away from muzzle when attaching/detaching. Securely fits a broad range of weapons using key kit provided. Extensively live-fire tested. Operating temperature: -40°F to +120°F. IPX7 rated design; waterproof to one meter for 30 minutes. Serialized for positive identification.

69220 Standard model includes rail locating keys for a variety of weapons with Picatinny or Glock style rails - lithium battery - Boxed - Black

69221 H&K USP Compact Model - Black

69222 H&K USP Full-Size Model - Black

TLR-4®

Designed for sub-compact and compact weapons, it has all the same great features as the TLR-3® with a red laser light for accurate aiming.

TRADITION

SIZE: 2.73" x 1.2" x 1.99"
(6.93 x 3.05 x 5.05 cm)
WEIGHT: 2.81 oz (79.7 g)
COLOR: Black

LUMENS: 125
CANDELA: 5,300
RUN TIME: 1h 30m



LIGHT SOURCE: C4® LED, with a 50,000 hour lifetime. 640-660nm red laser.

LENS: Borofloat high-temperature glass.

BATTERY: One 3 Volt "CR2" lithium battery, with a shelf life of ten years.

ON/OFF: Ambidextrous momentary/steady on/off switch. Three position Mode Selector switch for Laser only, LED illumination only or both Laser and LED.

FEATURES: Ultra-lightweight and compact. Ambidextrous momentary/steady on/off switch. One-handed snap-on and tighten interface keeps hands away from muzzle when attaching/detaching. Securely fits a broad range of weapons using key kit provided (key kit not provided with H&K USP models). Windage and Elevation adjustment screws mounted in brass bushings for long life and dependable zero retention of laser. Operating temperature: -10°F to +120°F. IPX4 rated- water resistant. Serialized for positive identification.

69240 Standard model includes rail locating keys for a variety of weapons with Picatinny or Glock style rails - lithium battery - Boxed - Black

69241 H&K USP Compact Model - Black

69242 H&K USP Full-Size Model - Black

TLR-3/TLR-4 ACCESSORIES:

Accessory Name	TLR-3	TLR-4
CR2 lithium batteries - 2 Pack	69223	69223
H&K USP Conversion Kit - Compact	69224	69224
H&K USP Conversion Kit - Full Size	69225	69225
Holster	69201	69202

NON-RECHARGEABLE

TACTICAL WEAPONS-MOUNTED SERIES

// PERFORMANCE.PERIOD.



TLR-1® GAME SPOTTER®

A long-gun/long-range light with a green LED that's designed to see at a distance, preserve night vision and not spook varmints.



shown with remote switch backplate.

LIGHT SOURCE: C4® LED, green (520-535nm), impervious to shock with a 50,000 hour lifetime.

LENS: Unbreakable polycarbonate lens with scratch-resistant coating, O-ring sealed.

BATTERY: Two 3 Volt "CR123A" lithium batteries, with a storage life of ten years.

ON/OFF: Standard Switch: Ambidextrous momentary/steady On-Off. Remote Switch: Momentary/steady On-Off and port plug for remote switch assembly.

FEATURES: One handed snap-on/tighten interface keeps hands away from muzzle when attaching/detaching. Mounts directly to long guns with MIL-STD-1913 (Picatinny) rails. Extensively live-fire tested. Impact resistant construction. Operating temperature: -40°F to +120°F. IPX7 rated design; waterproof to 1 meter for 30 minutes.

NOTE: NIGHT HUNTING WITH ARTIFICIAL LIGHT MAY BE PROHIBITED OR RESTRICTED IN YOUR STATE. PLEASE CHECK YOUR STATE'S GAME LAWS FOR CLARIFICATION.

HP SERIES

SIZE: 4.83" x 1.44" x 2.2"
(12.27 x 3.66 x 5.59 cm)

WEIGHT: 5.6 oz (158.8 g)

COLOR: Black

LUMENS:	160
CANDELA:	31,000
DISTANCE:	352m
RUN TIME:	1h 45m

69227 STD. Includes Rail Locating Keys for Glock style, 1913 Picatinny, S&W 99/TSW, and Beretta 90two. Lithium batteries. Boxed. Black.

69228 RMT. Includes Rail Locating Keys for Glock style, 1913 Picatinny, S&W 99/TSW, and Beretta 90two. Remote switch and Lithium batteries. Boxed. Black.



TLR-2® G includes Rail Locating Keys for Glock style, 1913 Picatinny, S&W 99/TSW, and Beretta 90two

The TLR-2G features a green laser, that's visible in daylight, and provides optimum precision and focus for acquiring your target no matter what time of day or night it is.

THE TLR[®]

FAMILY JUST WENT **GREEN.**

TLR-4[®] G

The TLR-4 sub-compact and compact weapon light is now available with an integrated direct drive green laser for aiming. The green laser is visible in daylight as well as in the dark. The TLR-4 G operates through an extremely wide temperature range.



TRADITION

NEW FOR '14

SIZE: 2.73" x 1.2" x 1.99"
(6.93 x 3.05 x 5.05 cm)

WEIGHT: 2.81 oz (79.7 g)

COLOR: Black

LUMENS:	115
CANDELA:	5,200
RUN TIME:	1h 45m

LIGHT SOURCE: C4[®] LED, direct drive green laser (510-530nm), impervious to shock with a 50,000 hour lifetime.

LENS: Borofloat high-temperature glass.

BATTERY: One 3 Volt "CR2" lithium battery, with a shelf life of ten years.

ON/OFF: Ambidextrous momentary/steady on/off switch. Three position Mode Selector switch for Laser only, LED illumination only or both Laser and LED.

FEATURES: Ultra-lightweight and compact. Ambidextrous momentary/steady on/off switch. One-handed snap-on and tighten interface keeps hands away from muzzle when attaching/detaching. Securely fits a broad range of weapons using key kit provided (key kit not provided with H&K USP models). Windage and elevation adjustment screws mounted in brass bushings for long life and dependable zero retention of laser. Operating temperature: -20°F to +120°F. IPX4 rated-water resistant. Serialized for positive identification.

69245	Standard model includes rail locating keys for a variety of weapons with Picatinny or Glock style rails—lithium battery—Boxed—Black
-------	---

69246	H&K USP Compact Model. Black.
-------	-------------------------------

69247	H&K USP Full-Size Model. Black.
-------	---------------------------------

TLR-2[®] G

The G is for green. This is a new version of our TLR-2 with a green laser to guide your aim. Unlike the red laser, the green is visible in daylight.



SIZE: 3.39" x 1.47" x 1.83"
(8.61 x 3.73 x 4.64 cm)

WEIGHT: 4.58 oz (130 g)

COLOR: Black

TRADITION

LUMENS:	200
CANDELA:	6,300
DISTANCE:	159m
RUN TIME:	1h 15m

LIGHT SOURCE: C4[®] LED, impervious to shock with a 50,000 hour lifetime. 522-542nm green laser.

LENS: High-temperature, shock-mounted, impact-resistant Borofloat glass.

BATTERY: One 3 Volt "CR123A" lithium batteries, with a shelf life of ten years.

ON/OFF: Ambidextrous momentary/steady on/off switch. Three position Mode Selector switch (Laser only, LED Illumination only, both).

FEATURES: High visibility Green Laser. C4[®]LED technology for extreme brightness. Fits existing weapon holsters made for the TLR-2. Ambidextrous momentary/steady On-Off switch. One handed snap-on & tighten interface keeps hands away from muzzle when attaching/detaching. Securely fits a broad range of weapons. Mounts directly to handguns with Glock-style rails and to all MIL-STD-1913 (Picatinny) rails. Includes keys for Glock-style, Picatinny, Beretta 90two, S&W 99 and S&W TSW Extensively live-fire tested impact resistant construction. Windage and Elevation adjustment screws mounted in aluminum body for long life and dependable zero retention. Highly accurate sight repeatability when remounting. Operating temperature: 32°F to 104°F. IPX4 rated design for water resistant operation. Strobe can be disabled.

69250	Includes Rail Locating Keys for Glock style, 1913 Picatinny, S&W 99/TSW, and Beretta 90two. Lithium batteries. Boxed. Black.
-------	--

NON-RECHARGEABLE

TACTICAL HAND-HELD SERIES

// PERFORMANCE.PERIOD.

WHEN IT COMES TO HAND-HELD TACTICALS...

THE BRIGHTEST LIGHT CONTROLS THE FIGHT.

SUPER TAC® X



High and low intensity modes, strobe mode and the latest in power LED technology.

LIGHT SOURCE: C4® LED, with a 50,000 hour lifetime.

LENS: Unbreakable polycarbonate with scratch-resistant coating. O-ring sealed.

BATTERY: Two 3 Volt "CR123A" lithium batteries, with a shelf life of ten years.

ON/OFF: Multi-function, push-button tactical tailswitch. One-handed operation of momentary, variable intensity or strobe mode.

FEATURES: IPX4 rated for water-resistant operation. 2 meter impact resistance tested. All openings o-ring sealed to resist moisture. Serialized for positive identification. LED solid state power regulation circuitry provides regulated light output throughout battery life. Removable pocket clip. Fits Streamlight 69100 Rail Mount. Operates with remote switches.

88708	with holster and lithium batteries—Box—Black
88709	with lithium batteries—Clam packaged—Black
88710	Super Tac Kit: Vert. grip with mount—Boxed—Black



Super Tac Kit. Includes vertical grip with rail and low profile mount.

SIZE: 6.62" x 2.2" x .9"
(16.81 x 5.59 x 2.29 cm)

WEIGHT: 7.1 oz (200 g)

COLOR: Black

	HIGH	LOW
LUMENS:	200	10
CANDELA:	40,000	2,000
DISTANCE:	400m	89m
RUN TIME:	2h 30m	50h

Strobe runs 6 hours

Our legacy products remain available. Please see www.streamlight.com for details.

TL-2® X



C4® enhanced LED tactical flashlight pierces the darkness and shine for hours. Slides easily into rail mount, and includes a handy belt/pocket clip.

LIGHT SOURCE: C4® LED, with a 50,000 hour lifetime.

LENS: High-temperature glass lens, gasket-sealed.

BATTERY: Two 3 Volt "CR123A" lithium batteries, with a shelf life of ten years.

ON/OFF: Multi-function, push-button tactical tailswitch. One-handed operation of momentary, variable intensity or strobe mode.

FEATURES: IPX4 rated design for water-resistant operation. 3 meter impact resistance tested. Includes pocket clip, adjustable lanyard and anti-roll head. Serialized for positive identification. LED solid state power regulation provides maximum light output throughout battery life.

88119	with lithium batteries—Clam packaged—black
-------	--

SIZE: 5.65" x 1.25" x 0.9"
(13.33 x 3.18 x 2.29 cm)

WEIGHT: 4.7 oz (129 g)

COLOR: Black

	HIGH	LOW
LUMENS:	200	10
CANDELA:	11,000	550
DISTANCE:	210m	47m
RUN TIME:	2h 30m	50h

Strobe runs 6 hours



*Fits TangoDown Rail Covers (includes two screws, tie wrap, double stick tape and retaining clips)



Remote & Mounts	Remote Switch Retaining Clips	12 Ga. Mag Tube	Rail Mount	Amb. Vert. Grip w/Rail	AR15/M16 Adapter	Low Profile Mount	Remote Switch w/Coil Cord*	Remote Switch w/8" Cord*
Super Tac X	88178	69903	69100	69114	69902	88118	88186	88185
TL-2 X	88178	69903	69100	69114	69902	88118	88186	88185
NightFighter X	-	-	-	-	-	-	-	-
Scorpion X	-	-	-	-	-	-	-	-

NIGHTFIGHTER® X

The NightFighter® tactical light is the lightest flashlight in its class. The unique adjustable ring is designed for easy one-handed operation.



LIGHT SOURCE: C4® LED, with a 50,000 hour lifetime.

LENS: High-temperature glass, gasket-sealed.

BATTERY: Two 3 Volt "CR123A" lithium batteries with a shelf life of ten years.

ON/OFF: Momentary push-button tailswitch provides momentary access to all modes. Rotary on/off.

FEATURES: IPX4 rated design for water-resistant operation. 3 meter impact resistance tested. Includes pocket clip, adjustable lanyard, anti-roll head and adjustable grip-ring. Serialized for positive identification. LED solid state power regulation provides maximum light output throughout battery life.

SIZE: 5.4" x 1.25" x .88"
(13.72 x 3.18 x 2.24 cm)

WEIGHT: 5.2 oz (147 g)

COLOR: Black

	HIGH	LOW
LUMENS:	200	10
CANDELA:	11,000	550
DISTANCE:	210m	47m
RUN TIME:	2h 30m	50h

Strobe runs 6 hours

The fully adjustable ring – unique to the NightFighter X – adjusts to any hand size, providing a sure grip for one-handed operation.

88008 with lithium batteries – Clam packaged – black

SCORPION® HL

The only tactical light with a rubberized grip and tail switch is now a high lumen flashlight! It has 600 lumens of blinding light, TEN-TAP® programming and a new sleeve design for better grip.



HL SERIES

NEW FOR '14

SIZE: 5.46" x 1.375" x .96"
(13.87 x 3.49 x 2.44 cm)

WEIGHT: 4.8 oz (136 g)

COLOR: Black

	HIGH	LOW
LUMENS:	600	33
CANDELA:	16,000	800
RUN TIME:	1h 15m	18h

Strobe runs 2.5 hours

TEN-TAP® programmable switch allows user selection of one of three different programs:

- high/strobe/low (factory default)
- high only
- low/high

85400 with lithium batteries – Black

SCORPION® X



Full-featured tactical C4® LED flashlight has high, low and strobe modes and a rubberized housing for a secure grip.

LIGHT SOURCE: C4® LED, impervious to shock with a 50,000 hour lifetime.

LENS: High-temperature glass, gasket-sealed.

BATTERY: Two 3 Volt "CR123A" lithium batteries with a shelf life of ten years.

ON/OFF: Multi-function, push-button tactical tailswitch. One-handed operation of momentary, variable intensity or strobe mode.

FEATURES: IPX4 rated design for water-resistant operation. 3 meter impact resistance tested. LED solid state power regulation provides maximum light output throughout battery life. Also has "Anti-Roll" head.

SIZE: 5.6" x 1.25" x .94"
(14.22 x 3.18 x 2.39 cm)

WEIGHT: 5.0 oz (142 g)

COLOR: Black

	HIGH	LOW
LUMENS:	200	10
CANDELA:	11,000	550
DISTANCE:	210m	47m
RUN TIME:	2h 30m	50h

Strobe runs 6 hours

85011 with lithium batteries – Clam packaged – black



Holsters for:	Nylon Holster	Deluxe Holster
Super Tac X	75910	-
TL-2 X	85905	85909
NightFighter X	85905	85909
Scorpion X	85905	85909
Scorpion HL	85905	85909



CR123A Li Batteries:	
2 Pack	85175
4 Pack	85180
12 Pack	85177
400 Pack	85179

Lenses for:	
Super Tac X	-
TL-2 X	85115
NightFighter X	85115
Scorpion X	85115



Red Flip Lens	Green Flip Lens	Blue Flip Lens	Infrared Lens
-	-	-	-
85115	85117	85116	74039
85115	85117	85116	74039
85115	85117	85116	74039

NON-RECHARGEABLE

TACTICAL HAND-HELD SERIES

// PERFORMANCE.PERIOD.

POLYTAC®

Its tough, durable nylon polymer housing is now more rugged than ever. But the big news is more brightness. We increased the lumens to 275 on high to make this an even more powerful, long-lasting tactical light.

LIGHT SOURCE: C4® LED, with a 50,000 hour lifetime.

LENS: Glass lens; O-ring sealed.

BATTERY: Two 3 Volt "CR123A" lithium batteries with a shelf life of ten years.

ON/OFF: Multi-function push button tactical tailswitch provides one-handed operation of momentary and variable intensity modes. TEN-TAP® programmable switch allows user selection of one of three different programs: high/strobe/low (factory default), high only, or low/high.

FEATURES: LED solid state power regulation provides maximum light output throughout battery life. IPX7 rated design; waterproof to 1 meter for 30 minutes.

88850	with lithium batteries—Clam packaged—Black
88851	with lithium batteries—Clam packaged—Coyote
88853	with lithium batteries—Clam packaged—Yellow
88854	Helmet Lighting Kit—Clam packaged—Yellow



SIZE: 5.34" x 1.36" x 1"
(13.56 x 3.54 x 2.54 cm)

WEIGHT: 4.21 oz (121 g)

COLOR: Black, Coyote or Yellow

	HIGH	LOW
LUMENS:	275	14
CANDELA:	9,500	500
DISTANCE:	195m	45m
RUN TIME:	3h	65h

Strobe runs 5.5 hours

NFPA

Meets requirements of NFPA 1971-8.6 (2007)

TRADITION

UPDATED FOR '14

TEN-TAP® programmable switch allows user selection of one of three different programs:

- high/strobe/low (factory default)
- high only
- low/high



Helmet Lighting Kit

POLYTAC® HP

The High Performance model of the PolyTac now delivers even higher performance. It's brighter, with 275 lumens on high; and the durable nylon polymer housing is tougher than ever with a surer, more rugged grip.

LIGHT SOURCE: C4® LED, with a 50,000 hour lifetime.

LENS: Unbreakable polycarbonate with scratch-resistant coating, O-ring sealed.

BATTERY: Two 3 Volt "CR123A" lithium batteries with a shelf life of ten years.

ON/OFF: Multi-function push button tactical tailswitch provides one-handed operation of momentary and variable intensity modes. TEN-TAP® programmable switch allows user selection of one of three different programs: high/strobe/low (factory default), high only, or low/high.

FEATURES: LED solid state power regulation provides maximum light output throughout battery life. IPX7 rated design; waterproof to 1 meter for 30 minutes.

88860	with lithium batteries—Clam packaged—Black
88861	with lithium batteries—Clam packaged—Coyote
88863	with lithium batteries—Clam packaged—Yellow



HP SERIES

UPDATED FOR '14



SIZE: 5.90" x 1.68" x 1"
(14.95 x 4.26 x 2.54 cm)

WEIGHT: 5.2 oz (148 g)

COLOR: Black, Coyote or Yellow

	HIGH	LOW
LUMENS:	275	14
CANDELA:	19,000	1,000
DISTANCE:	275m	63m
RUN TIME:	3h	56h

Strobe runs 5.5 hours

TEN-TAP® programmable switch allows user selection of one of three different programs:

- high/strobe/low (factory default)
- high only
- low/high

THE POLYTAC SERIES ARE SUPER-BRIGHT AND
**WITHSTAND
 CONSTANT
 PUNISHMENT.**

POLYTAC 90°

This versatile right-angle compact tactical flashlight can clip onto turn-out gear, or onto our an elastic head strap for a headlamp. It's super-bright, can be operated easily with gloves, and is encased in a durable nylon polymer housing.

LIGHT SOURCE: C4® LED, with a 50,000 hour lifetime.

LENS: Glass lens; gasket-sealed.

BATTERY: Two 3 Volt "CR123A" lithium batteries with a shelf life of ten years.

ON/OFF: Head-mounted, push-button switch provides one-handed momentary or constant on operation. Fast double-click from off activates Strobe mode; fast triple-click from off activates Low mode.

FEATURES: 90° head. 1 meter impact resistance tested. IPX7 rated design; waterproof to 1 meter for 30 minutes. Integrated carabiner style D-ring for a variety of attachment methods. Fully rotatable/reversible/removable clip that allows for a variety of mounting positions. LED solid state power regulation provides maximum light output throughout battery life. Individually serialized for positive identification.

88830	with lithium batteries-Clam packaged-Black
88831	with lithium batteries-Clam packaged-Yellow
88834	with lithium batteries-Clam packaged-Orange
88832	with lithium batteries & Gear Keeper®-Orange
88833	Gear Keeper®
14059	Elastic Headstrap - Coyote



Includes integrated clip and foldable hook.

Top-mounted switch for easy on/off.

SIZE: 5.22" x 1.25" x 1"
 (13.3 x 3.18 x 2.54 cm)

WEIGHT: 4.1 oz (116 g)

COLOR: Black, Yellow or Orange

	HIGH	LOW
LUMENS:	170	17
CANDELA:	7,000	700
DISTANCE:	167m	53m
RUN TIME:	3h 45m	30h

Strobe runs 6 hours

NFPA

Meets requirements of NFPA 1971-8.6 (2007)

For more information on the Gear Keeper® version, please see Page 33.

Colored & Infrared Lenses



Headstrap



Accessory Name	PolyTac LED	PolyTac LED HP	PolyTac 90 LED
CR123A lithium batteries-2 Pack	85175	85175	85175
CR123A lithium batteries-6 Pack	85180	85180	85180
CR123A lithium batteries-12 Pack	85177	85177	85177
CR123A lithium batteries-400 Pack	85179	85179	85179
Colored Flip Lens-Red	69115	-	-
Colored Flip Lens-Blue	69116	-	-
Colored Flip Lens-Green	69117	-	-
Infrared Lens	69118	-	-
Rubber Helmet Strap	99075	99075	99075
Elastic Headstrap	-	-	14059

NON-RECHARGEABLE

TACTICAL HAND-HELD SERIES // PERFORMANCE.PERIOD.

THE PROTAC HL3[®] WITH 1,100 LUMENS.

PROTAC HL[®]3

Compact and lightweight, the ProTac HL[®] 3 is incredibly bright with 1,100 lumens. It's the brightest addition to the ProTac[®] series and one of the brightest tactical lights of its size.

LIGHT SOURCE: C4[®] LED, with a 50,000 hour lifetime.

LENS: Glass lens; O-ring sealed.

BATTERY: Three 3 Volt "CR123A" lithium batteries, with a shelf life of ten years.

ON/OFF: Multi-function, push-button tactical tailswitch. One handed operation of momentary, variable intensity or strobe mode. TEN-TAP[®] programmable switch allows user selection of one of three different programs: high/strobe/low (factory default), high only, or low/high.

FEATURES: LED solid state power regulation provides maximum light output throughout battery life. IPX7 rated design; waterproof to one meter for 30 minutes. Anti-roll facecap. Removable pocket clip. Serialized for positive identification.

88047 with lithium batteries and holster-Black



TEN-TAP[®] programmable switch allows user selection of one of three different programs:

- high/strobe/low (factory default)
- high only
- low/high



HL SERIES
// NEW FOR '14

SIZE: 7.1" x 1.73" x 1.0"
(18.03 x 4.39 x 2.54 cm)
WEIGHT: 9.3 oz (263 g)
COLOR: Black

	HIGH	LOW
LUMENS:	1,100	35
CANDELA:	36,000	1,200
DISTANCE:	379m	69m
RUN TIME:	1h 30m	36h

Strobe runs 1.5 hours

PROTAC HL®

Super compact and bright, the ProTac HL offers 600 lumens of blinding light and the latest in power LED technology. TEN-TAP programming provides three different user selectable modes.

LIGHT SOURCE: C4® LED, with a 50,000 hour lifetime.

LENS: Glass lens; O-ring sealed.

BATTERY: Two 3 Volt "CR123A" lithium batteries, with a shelf life of ten years.

ON/OFF: Multi-function, push-button tactical tailswitch. One handed operation of momentary, variable intensity or strobe mode. TEN-TAP® programmable switch allows user selection of one of three different programs: high/strobe/low (factory default), high only, or low/high.

FEATURES: LED solid state power regulation provides maximum light output throughout battery life. IPX7 rated design; waterproof to one meter for 30 minutes. Anti-roll facecap. Removable pocket clip. Serialized for positive identification.

88040 with lithium batteries and holster—Black



Nylon Holster

TEN-TAP® programmable switch allows user selection of one of three different programs:

- high/strobe/low (factory default)
- high only
- low/high



HL SERIES

SIZE: 5.4" x 1.375" x 1.0"
(13.72 x 3.49 x 2.54 cm)

WEIGHT: 5.6 oz (158 g)

COLOR: Black

	HIGH	LOW
LUMENS:	600	33
CANDELA:	16,000	800
DISTANCE:	253m	57m
RUN TIME:	1h 15m	18h

Strobe runs 2.5 hours

PROTAC HL® HEADLAMP

The HL® Series has gone hands-free! When your task requires both hands and a bright light with a wide, flood beam, reach for the ProTac HL Headlamp. It produces 540 lumens of light that reaches 172 meters.

LIGHT SOURCE: C4® LED, with a 50,000 hour lifetime.

LENS: Glass lens; gasket sealed.

BATTERY: Two 3 Volt "CR123A" lithium batteries, with a shelf life of ten years.

ON/OFF: Multi-function, push-button switch. One handed operation of momentary, variable intensity or strobe mode. TEN-TAP® programmable switch allows user selection of one of three different programs: high/medium/low (factory default), high only, or low/medium/high.

FEATURES: LED solid state power regulation provides maximum light output throughout battery life. IPX4 rated for water resistant operation. All openings o-ring sealed. 1 meter impact resistance tested.

61304 with lithium batteries and elastic and rubber straps—Black



HL SERIES

NEW FOR '14

TEN-TAP® programmable switch allows user selection of one of three different programs:

- high/medium/low (factory default)
- high only
- low/medium/high

	HIGH	MEDIUM	LOW
LUMENS:	540	95	18
CANDELA:	7,400	1,200	250
DISTANCE:	172m	69m	31m
RUN TIME:	1h 45m	8h	36h



SIZE: 3.66" x 1.2" x 2.6"
(9.29 x 3.05 x 6.60 cm)

WEIGHT: 6.6 oz (187 g)

COLOR: Black

NON-RECHARGEABLE

TACTICAL HAND-HELD SERIES

// PERFORMANCE.PERIOD.

PROTAC® 1L PROTAC® 2L

ProTac® 1L weighs just 2.0 oz., yet it delivers 180 lumens on high and runs up to 17 hours on low. ProTac® 2L features 260 lumens, and lithium batteries for lots of power and long run times.



Nylon Holster



Nylon Holster

TEN-TAP® programmable switch allows user selection of one of three different programs:

- high/strobe/low (factory default)
- high only
- low/high



	HIGH	LOW
PROTAC 1L		
LUMENS:	180	12
SIZE: 3.43" x .9" x .77" (8.71 x 2.29 x 1.96 cm)	CANDELA: 3,800	250
WEIGHT: 2.0 oz (57 g)	DISTANCE: 123m	32m
COLOR: Black	RUN TIME: 2h	24h

Strobe runs 4 hours

PROTAC® 1L
88030 with (1) lithium battery and holster – Black

	HIGH	LOW
PROTAC 2L		
LUMENS:	260	13
SIZE: 4.77" x .9" x .77" (12.12 x 2.29 x 1.96 cm)	CANDELA: 5,600	300
WEIGHT: 2.8 oz (79 g)	DISTANCE: 150m	35m
COLOR: Black	RUN TIME: 3h	50h

Strobe runs 6 hours

PROTAC® 2
88031 with (2) lithium batteries and holster – Black

PROTAC® 1AA PROTAC® 2AA

The ProTac® 1AA and 2AA are small, lightweight, and extremely bright.

TEN-TAP® programmable switch allows user selection of one of three different programs:

- high/strobe/low (factory default)
- high only
- low/high



	HIGH	LOW
PROTAC 1AA		
LUMENS:	70	5
SIZE: 4.16" x .9" x .65" (10.57 x 2.29 x 1.65 cm)	CANDELA: 1,450	125
WEIGHT: 2.3 oz (65 g)	DISTANCE: 76m	22m
COLOR: Black	RUN TIME: 2h	32h

Strobe runs 4 hours

PROTAC® 1AA
88032 with (1) alkaline battery and holster – Black



Nylon Holster

Nylon Holster

	HIGH	LOW
PROTAC 2AA		
LUMENS:	155	11
SIZE: 6.14" x .9" x .65" (15.60 x 2.29 x 1.65 cm)	CANDELA: 3,300	200
WEIGHT: 3.4 oz (96 g)	DISTANCE: 115m	28m
COLOR: Black	RUN TIME: 2h	36h

Strobe runs 4 hours

PROTAC® 2AA
88033 with (2) alkaline batteries and holster – Black

THE PROTAC SERIES...
**SMALLEST,
 LIGHTEST HAND-HELD TACTICALS.**

PROTAC® 2AAA



ProTac® 2AAA has high, low and strobe modes; and it runs up to 30 hours on low mode.

LIGHT SOURCE: C4® LED, 50,000 hour lifetime.

LENS: Glass lens; O-ring sealed.

BATTERY: Two "AAA" alkaline batteries.

ON/OFF: Multi-function, push-button tactical tailswitch. One-handed operation of momentary or variable intensity mode.

FEATURES: LED solid state power regulation provides maximum light output throughout battery life. IPX7 rated design; waterproof to one meter for 30 minutes. Anti-roll facecap. Removable pocket clip. Serialized for positive identification.



SIZE: 5.62" x .72" x .5"
 (14.27 x 1.83 x 1.27 cm)
WEIGHT: 2.0 oz (57 g)
COLOR: Black

	HIGH	LOW
LUMENS:	80	10
CANDELA:	1,550	200
DISTANCE:	80m	28m
RUN TIME:	1h 30m	30h

Strobe runs 5 hours

88039 w/alkaline batteries –Black

PROTAC® EMS



The ProTac® EMS light provides the optimal non-glare light for pupil and wound examination.

LIGHT SOURCE: C4® LED, 50,000 hour lifetime.

LENS: Glass lens; O-ring sealed.

BATTERY: One "AA" alkaline battery or one "AA" lithium.

ON/OFF: Multi-function, push-button tactical tailswitch. One-handed operation of momentary or variable intensity mode.

FEATURES: EMS light has low, medium and high modes. It starts in low for pupil examination and progresses to a brighter beam. LED solid state power regulation provides maximum light output throughout battery life. IPX7 rated design; waterproof to 1 for 30 minutes. Anti-roll facecap. Removable pocket clip. Serialized for positive identification.



Nylon Holster

SIZE: 3.97" x .9" x .65"
 (10.08 x 2.29 x 1.65 cm)
WEIGHT: 2.3 oz (65 g)
COLOR: EMS Blue

	LOW	MED	HIGH
LUMENS:	3.6	10	50
CANDELA:	120	340	1,450
DISTANCE:	20m	36m	76m
RUN TIME:	36h	14h	1h 30m

88034 with (1) alkaline battery and holster –EMS Blue

88037 Accessory Holster

NON-RECHARGEABLE

MILITARY HANDS-FREE / SIGNALING SERIES


// PERFORMANCE.PERIOD.



STREAMLIGHT TECHNOLOGY:
**MULTI-TASK
LIGHTING.**



ROTATES 360° ON HELMET MOUNT

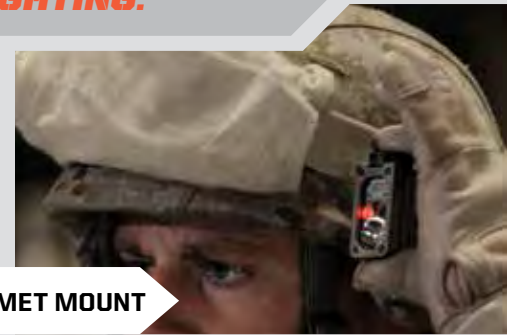

CLIPS ANYWHERE



PIVOTS 90° ON HEADSTRAP



Accessory Name	Sidewinder	Sidewinder	
	Compact II	Compact	Sidewinder
Helmet Mount - Coyote	14055	14055	14055
Rail Mount for Helmet - Coyote	14057	14057	14057
Safety Wand - Glow-in-the-Dark	14902	14902	14902
CR123A Lithium Batteries - 2 Pk	85175	85175	85175
Elastic Headstrap	14059	14059	-



Safety Wand



Helmet Rail Mount



Helmet Mount



Headstrap

THE SIDEWINDER COMPACT II... MULTIPLE POWER SOURCES MAXIMUM FUNCTIONALITY AND DEPENDABILITY.

SIDEWINDER COMPACT® II

The same features as the Sidewinder Compact® with a more versatile power source; it can use a single CR123 lithium, "AA" alkaline, or "AA" lithium battery. The entire body rotates 185°, allowing it to be aimed in any direction, even sideways or backward, for signaling and lighting with no restrictions. Features a white C4® LED that projects a brilliant white light for task lighting and navigating and colored LEDs for versatility and your specific tasks.

LIGHT SOURCE: High-output C4® LED, white, impervious to shock with 50,000Hr lifetime. 5mm IR LED, peak wavelength 880nm. 5mm Red LED, peak wavelength 630nm. 5mm Blue LED, peak wavelength 470nm. 5mm Green LED, peak wavelength 527nm. Colored LEDs 100,000Hr lifetime. See specific model for LED combinations.

LENS: Unbreakable polycarbonate with scratch-resistant coating. Gasket-sealed.

ON/OFF: Compound On-Off mode selector switch ergonomically separates On-Off-Dimming-Strobe and LED selection functions. Design does not require the operator to access separate switching locations on the device. Rubber dome actuator and 4 position pull-to-turn locking rotary selector knob with IR LED tactile indicator provides easy operation even when wearing heavy gloves.

FEATURES: IPX7 rated design; waterproof to 1 meter for 30 minutes. 3 meter multiple orientation impact resistance tested. Pull-to-turn locking rotary selector knob prevents accidental mode changes and allows selection of four illumination sources. Built-in battery polarity protection guards against damage to the light. Cord attachment hole provided in clip capable of supporting 25 lb of load. O-ring and gasket-sealed openings for waterproof operation. Meets MIL-STD-810F, Method 512.4. Durable belt/clothing clip with integral helmet mount features.

SIDEWINDER COMPACT® II

Military Model

- 14510 White, Red, Blue, IR LEDs with Helmet Mount. Mailer-Coyote
- 14512 White, Red, Blue, IR LEDs with Helmet Mount. Clam-Coyote
- 14514 White, Red, Blue, IR LEDs with Helmet Mount and headstrap. Mailer-Coyote

Aviation Model

- 14531 White, Green, Blue, IR LEDs-Coyote
- 14520 White, Green, Blue, IR LEDs with Helmet Mount. Boxed-Coyote

Sidewinder Compact II Accessory Kits

- 14112 Helmet Mount Accessory Kit-Coyote Helmet Mount, Headstrap, and MOLLE plate
- 14113 Rail Mount Accessory Kit-Coyote Rail Mount, Headstrap and MOLLE plate



- Military Model
- Super-bright white C4® LED
- Blue LED
- IR/IFF LED
- Red LED

Operates on a AA Alkaline, AA Lithium or CR123A Lithium battery



- Aviation Model
- Super-bright white C4® LED
- Blue LED
- IR/IFF LED
- Green LED

SIZE: 3" x 1.07" x 2.04"
(7.62 x 2.72 x 5.21 cm)

WEIGHT: 2.4 oz (68 g)

COLOR: Coyote

	C4 HIGH W/CR123 LITHIUM	C4 HIGH W/"AA" LITHIUM	C4 HIGH W/"AA" ALKALINE
LUMENS:	55	47	47
CANDELA:	1,175	1,000	1,000
DISTANCE:	69m	63m	63m
RUN TIME:	6h	6h	2h

SIDEWINDER COMPACT II® BATTERY RUN TIME

CR123 LITHIUM/"AA" LITHIUM BATTERY					
LED	Low 10% Output	Medium 1 25% Output	Medium 2 45% Output	High 100% Output	Strobe 100% Output
C4®	70 Hrs	28 Hrs	16 Hrs	6 Hrs	10 Hrs
5mm IR or Red	100 Hrs+	72 Hrs	36 Hrs	16 Hrs	24 Hrs
5mm Blue or Green	100 Hrs+	60 Hrs	24 Hrs	12 Hrs	18 Hrs
"AA" ALKALINE BATTERY					
C4®	40 Hrs	16 Hrs	8 Hrs	2 Hrs	4 Hrs
5mm IR or Red	100 Hrs+	48 Hrs	18 Hrs	9 Hrs	14 Hrs
5mm Blue or Green	100 Hrs+	36 Hrs	12 Hrs	6 Hrs	10 Hrs

All run time claims to 10% of initial output level. Illumination output electronically regulated.



The Sidewinder Compact II is designed for versatility. It can operate on a "AA" Lithium, "AA" alkaline or CR123 Lithium battery.

NON-RECHARGEABLE

MILITARY HANDS-FREE / SIGNALING SERIES

// PERFORMANCE.PERIOD.

SIDEWINDER COMPACT®

This versatile lighting tool can fit in the palm of your hand! You can also clip it to your MOLLE vest, belt, hat brim or pocket. And a special helmet mount is available for the ultimate in mobility and hands-free illumination.

LIGHT SOURCE: High-output C4® LED, white, impervious to shock with 50,000Hr lifetime. 5mm IR LED, peak wavelength 880nm. 5mm Red LED, peak wavelength 630nm. 5mm Blue LED, peak wavelength 470nm. 5mm Green LED, peak wavelength 527nm. Colored LEDs 100,000Hr lifetime. See specific model for LED combinations.

LENS: Unbreakable polycarbonate with scratch-resistant coating. Gasket-sealed.

BATTERY: One (1) CR123A size lithium cell battery provides fast replacement with readily available batteries. Lithium cells allow operation in extreme temperature environments (-40F to 150F).

ON/OFF: Tactile indicator on rotary knob for IR LED position. Push-button switch enables/disables selected illumination source starting at low output and progressing to the brightest output in four discrete steps. Double-click of push-button initiates high output strobe of selected illumination source.

FEATURES: IPX7 rated design; waterproof to 1 meter for 30 minutes. 3 meter multiple orientation impact resistance tested. Pull-to-turn locking rotary selector knob prevents accidental mode changes and allows selection of four illumination sources. Built-in battery polarity protection guards against damage to the light. Cord attachment hole provided in clip capable of supporting 25 lb of load. O-ring and gasket-sealed openings for waterproof operation. Meets MIL-STD-810F, Method 512.4. Durable belt/clothing clip with integral helmet mount features.

SIZE: 3" x 1" x 2.01"
(7.62 x 2.54 x 5.11 cm)
WEIGHT: 2.4 oz (68 g)
COLOR: Coyote or Green

LUMENS:	55
CANDELA:	1,175
DISTANCE:	69m
RUN TIME:	5h 15m

SIDEWINDER COMPACT®

Military Model

- 14102 White, Red, Blue, IR LEDs with Helmet Mount. Clam-Coyote
- 14103 White, Red, Blue, IR LEDs with Helmet Mount. Clam-Green

Aviation Model

- 14120 White, Green, Blue, IR LEDs with Helmet Mount. Boxed-Coyote



Military Model

- Super-bright white C4® LED
- Blue LED
- IR/IFF LED
- Red LED



Aviation Model

- Super-bright white C4® LED
- Blue LED
- IR/IFF LED
- Green LED



SIDEWINDER COMPACT® LIGHT OUTPUT & BATTERY RUN TIME

LED	Light Output	Low 5% Output	Medium 1 25% Output	Medium 2 60% Output	High 100% Output	Strobe 100% Output
C4®	55 Lumens	60 Hrs+	28 Hrs	9 Hrs	5.25 Hrs	9 Hrs
5mm IR	25mW/sr (min) radiant intensity	100 Hrs+	48 Hrs	24 Hrs	14 Hrs	24 Hrs
5mm Red	1 Lumens	100 Hrs+	48 Hrs	24 Hrs	14 Hrs	24 Hrs
5mm Blue	1.8 Lumens	100 Hrs+	36 Hrs	18 Hrs	10 Hrs	18 Hrs
5mm Green	4.5 Lumens	100 Hrs+	36 Hrs	18 Hrs	10 Hrs	18 Hrs

All run time claims to 10% of initial output level. Illumination output electronically regulated.

SIDEWINDER... THE MOST VERSATILE MILITARY LIGHT IN THE WORLD.

SIDEWINDER®

LIGHT SOURCE: High-output C4® LED, white, impervious to shock with 50,000Hr lifetime. 5mm IR LED, peak wavelength 880nm. 5mm Red LED, peak wavelength 630nm. 5mm Blue LED, peak wavelength 470nm. 5mm Green LED, peak wavelength 527nm. Colored LEDs 100,000Hr lifetime. See specific model for LED combinations.

LENS: Unbreakable polycarbonate lens with scratch-resistant coating. Gasket-sealed.

BATTERY: Two (2) "AA" size alkaline cells provide fast replacement with readily available batteries. Lithium "AA" cells allow extended operation in extreme temperature environments (-40F to 150F). Tactile battery polarity indication on body allows replacement of cells in dark environment.

ON/OFF: Tactile indicator on rotary knob for IR LED position. Push-button switch enables/disables selected illumination source starting at low output and progressing to the highest output in 4 discrete steps. Sportsman model starts in high and progresses to low in 4 steps. Double-click of push-button initiates high output strobe of selected illumination source.

FEATURES: IPX7 rated design; waterproof to 1 meter for 30 minutes. 3 meter multiple orientation impact resistance tested. Tethered battery compartment cap facilitates replacement of cells without loss of cap. Cord attachment holes provided in battery compartment cover capable of supporting 25 lb of load. O-ring and gasket sealed openings for waterproof operation. Meets MIL-STD-810F, Method 512.4. Durable Belt/Clothing clip with integral helmet mount features. Attachment screw withstands 30 inch pounds average torque without failure or stripping.

SIDEWINDER®

Military Model

- 14000 w/alkaline-White, Red, Blue, IR LEDs-Clam packaged-Coyote
- 14001 w/alkaline-White, Red, Blue, IR LEDs-Clam packaged-Green
- 14022 w/alkaline-White, Red, Blue, IR LEDs w/Helmet Mount-Clam-Coyote
- 14027 w/alkaline-White, Red, Blue, IR LEDs w/Helmet Mount-Clam-Green

Aviation Model

- 14008 w/alkaline-White, Green, Blue, IR LEDs-Clam-Coyote
- 14024 w/alkaline-White, Green, Blue, IR LEDs with retainer-Boxed-Coyote

This flashlight has been engineered to meet a variety of hands-free task illumination requirements with various color LEDs operable at varying outputs and run times. The flashlight features a 185° tilting head and belt or web clip to allow positioning of the illumination source at the work area.



SIZE: 2.34" x 1.08" x 4.65"
(5.94 x 2.74 x 11.81 cm)
LITHIUM WEIGHT: 4.38 oz (124 g)
ALKALINE WEIGHT: 5.02 oz (142 g)
COLOR: Coyote or Green

LUMENS:	55
CANDELA:	1,175
DISTANCE:	69m
RUN TIME:	5h
	30m



SIDEWINDER® LIGHT OUTPUT & BATTERY RUN TIME

LED	Light Output	Low 5% Output	Medium 1 25% Output	Medium 2 60% Output	High 100% Output	Strobe 100% Output
C4®	55 Lumens	100 Hrs*	45 Hrs	11 Hrs	5.5 Hrs	10 Hrs
5mm IR	25mW/sr (min) radiant intensity	200 Hrs*	140 Hrs	60 Hrs	24 Hrs	40 Hrs
5mm Red	1 Lumens	200 Hrs*	140 Hrs	60 Hrs	24 Hrs	40 Hrs
5mm Blue	1.8 Lumens	150 Hrs*	100 Hrs	35 Hrs	16 Hrs	30 Hrs
5mm Green	4.5 Lumens	150 Hrs*	100 Hrs	35 Hrs	16 Hrs	30 Hrs

All run time claims to 10% of initial output level. Illumination output electronically regulated.

NON-RECHARGEABLE

CAMO BUCKMASTERS SERIES // PERFORMANCE.PERIOD.



BUCKMASTERS® PACKMATE®

Designed specifically to meet the outdoorsman's lighting needs, the lithium-powered Packmate combines Streamlight's C4® LED Technology with an extended run time mode and Night Vision Green LEDs that will not spook game.

LIGHT SOURCE: C4® LED, with a 50,000 hour lifetime.
Three ultra-bright green LEDs, with a 100,000 hour lifetime.

LENS: Unbreakable polycarbonate lens.

BATTERY: Two 3 Volt "CR123A" lithium batteries with a shelf life of ten years.

ON/OFF: Tailswitch: on/off and signal. Mode Select Options: Three ultra-bright green LEDs /one ultra-bright green LED / C4® LED-High / C4® LED-Low.

FEATURES: Micro-faceted reflector for smooth focus; O-ring sealed; weather resistant, and heavy-duty drop-tested construction. High-strength wrist lanyard.

51057 with lithium batteries—Clam packaged—Camo
85175 CR123A lithium batteries—2 Pack



SIZE: 5.44 " x 1.33" x .98"
(13.79 x 3.38 x 2.49 cm)

WEIGHT: 5.44 oz (152 g)

COLOR: RealTree® Hardwoods® Green High Definition (HD)

	C4 HIGH	C4 LOW	GREEN HIGH	GREEN LOW
LUMENS:	125	20	7.5	4
CANDELA:	6,000	1,000	80	40
RUN TIME:	2.75h	15h	38h	52h

BUCKMASTERS® TWIN-TASK® 2L

Lightweight, versatile light switches from powerful xenon bulb to three ultra-bright safety green LEDs. The dependable lithium batteries have a ten-year shelf life; and the water and corrosion-resistant casing is incredibly durable.

LIGHT SOURCE: 4.8 Volt, .9A high-pressure xenon bulb;
(3) safety green LEDs, with a 100,000 hour life.

LENS: Unbreakable polycarbonate lens.

BATTERY: Two 3 Volt "CR123A" lithium batteries with a shelf life of ten years.

ON/OFF: Push-button sequences through one xenon bulb, three LEDs or off.

FEATURES: Micro-faceted reflector for smooth focus. O-ring sealed. Water-resistant. Heavy-duty drop-tested construction.

51025 with lithium batteries—Clam packaged—Camo
85905 Nylon Holster
85175 CR123A lithium batteries—2 Pack



SIZE: 5.43" x 1.33" x .98"
(13.79 x 3.38 x 2.49 cm)

WEIGHT: 5.44 oz (152 g)

COLOR: RealTree® Hardwoods® Green High Definition (HD)

	XENON	(3) GREEN LEDs
LUMENS:	72	10
RUN TIME:	2h 30m	28h

WHEN YOU'RE HEADED INTO THE FIELD

RELY ON THE EXPERTS...

STREAMLIGHT & BUCKMASTERS.

BUCKMASTERS® CAMO TRIDENT®

Hands-free lighting with 90° tilting head. Features super-bright C4® LED and three safety-green LEDs within the same reflector. Three-position lighting includes C4® LED, one LED or three LEDs.

LIGHT SOURCE: All models - One (1) White C4® LED, impervious to shock with a 50,000 hour lifetime, three (3) 5mm Ultra Bright Safety Green LEDs, impervious to shock with 100,000 hr lifetime.

LENS: Unbreakable polycarbonate lens.

BATTERY: Three (3) "AAA" size, Alkaline or Lithium batteries.

ON/OFF: Push-button sequence through modes: One (1) 5mm LED, Three (3) 5mm LEDs, C4 power LED, and Off.

FEATURES: Low Battery Indicator - Red LED flashes when battery voltage is low and batteries are near the end of their usable life. LED is located in the reflector in between the "Low Batt" marking and functions while the light is energized. Tough ABS thermoplastic construction with elastomer over mold. IPX4 rated for water resistant operation. 2 meter impact resistance tested. 90 degree tilting head. Rubber Hard Hat Strap.

61070 3 Green LEDs with alkaline batteries - Camo



SIZE: 1.75" x 2.70" x 2.40"
(4.45 x 6.85 x 6.09 cm)

WEIGHT: 5.50 oz (156 g)

COLOR: RealTree® Hardwoods® Green High Definition (HD)

Camo Model	C4 LED	3 LEDS	1 LED
LUMENS:	80	20	6
CANDELA:	4,000	175	55
DISTANCE:	126m	26m	15m
RUN TIME:	5h	20h	63h

BUCKMASTERS® STYLUS PRO®

This powerful multi-task penlight is available in RealTree® Hardwoods® camouflage - ideal for the great outdoors.

LIGHT SOURCE: Ultra-bright green LED, with a 50,000 hour lifetime

LENS: Unbreakable and scratch-resistant polycarbonate lens.

BATTERY: Two "AAA" alkaline batteries.

ON/OFF: Push-button tailswitch.

FEATURES: Tailswitch for momentary on/off. O-ring sealed, shock proof and drop tested construction. Water-resistant per IPX4. Removable pocket clip.

66124 with Green LED - RealTree® Hardwoods® Green HD



SIZE: 5.3" x .6"
(13.4 x 1.5 cm)

WEIGHT: 1.64 oz (46.9 g)

COLOR: RealTree® Hardwoods® Green High Definition (HD)

LUMENS:	5
CANDELA:	73
DISTANCE:	17m
RUN TIME:	11h

NON-RECHARGEABLE

CAMO SERIES
// PERFORMANCE.PERIOD.



IF CAMO IS YOUR COLOR, WE'VE GOT YOU COVERED.

ENDURO®



One of the lightest, brightest, most comfortable headlamps available today. Features high and low lighting modes, a run time of up to 9 hours, an integrated rubber/elastic combination head strap, and a clip that attaches to the brim of your hat, coat lapel or car visor.

LIGHT SOURCE: .5 watt high-flux LED; 30,000 hours rated LED life. Ultra-bright green LED: 50,000 hours rated LED life.

LENS: Unbreakable polycarbonate lens.

BATTERY: Two 1.5V "AAA" cells.

ON/OFF: Push-button switch: 1st mode: Low; 2nd mode: High.

RUN TIME: White LED High: 6 hours; green LED High: 9 hours.

FEATURES: O-ring sealed construction—waterproof to 1 meter for one hour. Impact resistant housing—drop test verified. High-Flux LED—Reflector Focused for 100 ft+ range. Solid state power regulation provides maximum light output throughout battery life. Integral hatclip. Packaged with batteries and rubber/elastic combo head strap.

61400 with alkaline batteries—Elastic Strap and Visor Clip—Black

61405 with alkaline batteries—Elastic Strap and Visor Clip—Camo



SIZE: 1.3" x 2.25" x 1.6"
(3.25 x 5.7 x 4 cm)

WEIGHT: 2.75 oz (78.5 g)

COLOR: Black or RealTree®
Hardwoods® Green High
Definition (HD)

BLACK MODEL WHITE LED	HIGH	LOW
LUMENS:	14.5	6
CANDELA:	850	—
RUN TIME:	6h	12h

CAMO MODEL GREEN LED	HIGH	LOW
LUMENS:	8	4
CANDELA:	162	—
RUN TIME:	9h	120h

Securely clips to the brim of your hat for convenient, hands-free use.



RECHARGEABLE LANTERNS

THE SIEGE SERIES

// PERFORMANCE.PERIOD.

STREAMLIGHT TECHNOLOGY: DECADES OF ILLUMINATION INNOVATION.



RUGGED PERFORMANCE //

- 340 LUMENS ON HIGH
- 12+ DAY RUN TIME ON LOW
- DROP TESTED TO 2 METERS



VERSATILE //

- 3 WHITE LIGHT SETTINGS
- WILL HANG ANYWHERE
- D-RINGS CLIP ANYWHERE
- REMOVE THE TOP FOR DIRECT ILLUMINATION



SURVIVOR //

- WATERPROOF
- ENGINEERED TO FLOAT
- RESISTANT TO BATTERY CORROSION



RESCUE //

- SHINES IN SOLID RED
- MORSE CODE S.O.S. SIGNAL LASTS 18 DAYS



THE SIEGE: IT'S GOT SURVIVAL INSTINCTS.

THE SIEGE® LED LANTERN

The Siege® isn't just another lightweight lantern - it's a super bright lantern with 340 lumens, bright enough to light up a whole campsite; and it runs over 30 hours on high! You can hang it upright or inverted, use it to signal for help, it's even waterproof to 1 meter. It's brighter, more durable, and much more versatile than other emergency/camping lanterns; yet it's compact enough to pack in a gear bag.



LIGHT SOURCE: Four (4) White C4® LEDs, impervious to shock with a 50,000 hour lifetime, and one Red C4® LED.

LENS: Unbreakable polycarbonate lenses.

BATTERY: Three "D" size, Alkaline batteries.

ON/OFF: White Output Modes = High, Medium, Low and Off. Red Output Modes = High, Flash SOS and Off. To change the lights (beam) color from white to red, or red to white, press and hold the on/off button for two seconds until the light changes color. Release the button. Switching Output Modes: Pushing the button within 1.5 seconds of the last button push will change the light mode. You may sequence through all light levels and then to off.

FEATURES: Battery Indicator in the on/off button- Changes from Green to Yellow to Red and then Flashing Red when the batteries are at the end of their useable life. IPX7 rated for waterproof operation to 1 meter submersion. 2 meter impact resistance tested. 2 D-Rings, top and bottom, for easy attachment. Spring loaded to fold out of the way when not in use. Ergonomic handle - Makes the light easy to carry and is designed to hook on any edge or bar.

44931 The Siege Lantern - Coyote

(4) WHITE C4 LEDs	HIGH	MEDIUM	LOW
LUMENS:	340	175	33
RUN TIME:	30h	70h	295h

Light output with outer globe removed.

SIZE: 3.8" x 7.25"
(9.65 x 18.41 cm)
WEIGHT: 1 lb 15 oz (878 g)
COLOR: Coyote

(1) RED LED	HIGH	FLASH/SOS MODE
LUMENS:	10	10
RUN TIME:	235h	430h



Versatile design features rugged carry handle and D-rings clip to hang virtually anywhere.



Shown with outer globe removed.

NON-RECHARGEABLE

STYLUS SERIES

// PERFORMANCE PERIOD.



STYLUS PRO REACH®

We added the extended reach and flexibility of the Stylus Reach® to the more powerful Stylus Pro® to create a brighter penlight with a 8" PVC cable which provides 14" of reach, helping you to get an intense light right where you need it.



- LIGHT SOURCE:** C4® LED, with a 30,000 hour lifetime.
- LENS:** Unbreakable and scratch-resistant polycarbonate lens.
- BATTERY:** Two "AAA" alkaline batteries.
- ON/OFF:** Push button tail switch - momentary or constant on operation.
- FEATURES:** Tailcap switch for momentary on/off. O-ring sealed, shock proof and drop-tested construction. Water-resistant per IPX4. Unbreakable pocket clip.



Magnet Clip Holder

66418 White LED - Clam packaged - Matte Black

SIZE: 14.6" x .6"
(37.1 x 1.5 cm)

WEIGHT: 2.7 oz (76.5 g)

COLOR: Matte Black

LUMENS:	38
CANDELA:	825
DISTANCE:	57m
RUN TIME:	8h

MICROSTREAM®

So small, you can keep it in your pants pocket or clip it to a cap for hands-free use. Ideal if you carry a lot of gear and don't want to be weighed down.



- LIGHT SOURCE:** C4® LED, with a 30,000 hour lifetime.
- LENS:** Unbreakable polycarbonate lens.
- BATTERY:** One "AAA" alkaline battery.
- ON/OFF:** Push-button tailswitch - momentary or constant on operation.
- FEATURES:** O-ring sealed. One meter impact resistance tested. Water-resistant per IPX4. High Strength "Break Away" safety lanyard. Removable pocket/hat clip.

66318 White LED - Clam packaged - Black

SIZE: 3.6" x .6"
(91.5 x 15 mm)

WEIGHT: 1.10 oz (31.2 g)

COLOR: Matte Black

LUMENS:	35
CANDELA:	360
DISTANCE:	38m
RUN TIME:	2h 15m

LIGHTING THE WAY THROUGH NORTHERN IRAQ... AND ON TO AFGHANISTAN

I just got back from yet another trip on the road, this time to northern Iraq. For the last 340+ days, your Stylus Pro pen light LED has been tucked into my ankle pocket providing instant access. I can't tell you how many times I've used it, but I can tell you that it's been so often that I successfully lost the clip it came with and have worn through the rubber coating over the button that turns it on and off. Thanks for such an awesome and reliable light. Power generation is still a huge challenge here, so having light at my fingertips was invaluable. I'll keep it in my pack for my next trip to Afghanistan, probably around next summer. Keep throwing the right kind of products out there, they're worth it.

Andrew J. "AJ" Brilla, Capt, USAF
Iraq Training and Advisory Mission-Air Force (ITAM-AF)
Chief, Logistics


STYLUS PRO® USB

Rechargeable penlight conveniently charges via USB connector - to wall or computer.

FEATURES: C4® LED technology for extreme brightness. IPX4 rated for water resistant operation. All openings o-ring sealed. 1 meter impact resistance tested. Micro USB charge port under water resistant sliding cover. Rechargeable using supplied USB cord. Removable pocket clip. Holster.

66133	Holster, 120V AC wall adapter, USB cord-Black
66134	Holster, USB cord-Black

NEW FOR '14

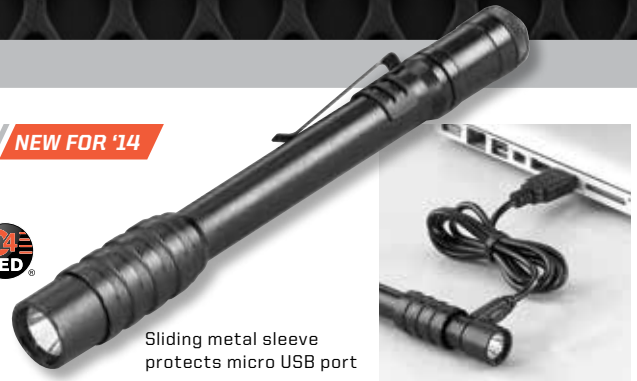

Sliding metal sleeve protects micro USB port

SIZE: 6.15" x .74"
(15.6 x 1.9 cm)
WEIGHT: 1.9 oz (53.8 g)
COLOR: Black

LUMENS:	70
CANDELA:	630
DISTANCE:	50m
RUN TIME:	3.5h

Recharge by plugging into USB port or optional AC wall adapter

STYLUS PRO®

Developed for multiple tasks for professionals and sportsmen. The hallmarks of this light are its compact durable construction, optimum beam output and a tailswitch for single-handed operation.

LIGHT SOURCE: White C4® LED, with a 30,000 hour lifetime. Green LED models have a 50,000 hour lifetime.

LENS: Unbreakable polycarbonate lens.

BATTERY: Two "AAA" alkaline batteries.

ON/OFF: Push-button tailswitch - momentary or constant on operation.

FEATURES: O-ring sealed. One meter impact resistance tested. Water-resistant per IPX4. Tear-resistant nylon holster. Removable pocket clip.

66118	White LED-Clam packaged-Matte Black
66121	White LED-Clam packaged-Silver
66120	White LED-Clam packaged-Red
66122	White LED-Clam packaged-Blue
66124	with Green LED - RealTree® Hardwoods® Green HD

SIZE: 5.3" x .6"
(13.4 x 1.5 cm)
WEIGHT: 1.64 oz (46.9 g)
COLOR: Matte Black, Silver, Blue or Red

	C4 WHITE LED	GREEN LED
LUMENS:	65	5
CANDELA:	690	73
DISTANCE:	52m	17m
RUN TIME:	6h 30m	11h



Holster

NON-RECHARGEABLE

STYLUS SERIES

// PERFORMANCE.PERIOD.



STYLUS®

This bright LED penlight has a battery life 20x greater than a standard flashlight and goes anywhere you need it.



SAFETY RATED MODEL OFFERED

LIGHT SOURCE: High-intensity 5mm LED, with a 100,000 hour lifetime. Available in White, Blue (470nm), Red (624nm), Green (527nm), or 12MW/sr IR (880nm).

BATTERY: Three "AAAA" size alkaline batteries.

ON/OFF: Features momentary blink or constant on operation.

FEATURES: IPX4 rated for water-resistant operation. Individually serialized for positive identification. Removable pocket clip. Glare guard protector. Safety rated model is intrinsically safe.

SIZE: 6.21" x .375"
(15.17 x .95 cm)

WEIGHT: 1.1 oz (31.19 g)

COLOR: Black, Gold, Silver, US flag, Red, Blue, Camo or Olive Drab

LED COLOR:	WHITE	GREEN	BLUE	RED
LUMENS:	11	7	2	2
CANDELA:	140	59	110	53
DISTANCE:	24m	15m	21m	15m
RUN TIME:	24h	24h	24h	24h

SAFETY RATED MODEL OFFERED



Intrinsic Safety for Haz. Loc. Class I, Div. 1, Groups A, B, C, D, T3C "Classified"



Intrinsic Safety for Haz. Loc. Class I, Div. 1, Groups A, B, C, D, T3C "Exia"



65006	Red LED-Clam packaged-Black
65012	White LED-Clam packaged-Silver
65016	Blue LED-Clam packaged-Silver
65018	White LED-Clam packaged-Black
65020	Green LED-Clam packaged-Black
65022	White LED-Clam packaged-Black
65024	White LED-Clam packaged-Gold
65035	White LED-Clam packaged-Red
65050	White LED-Clam packaged-Blue
65058	White LED-Clam packaged-Black, UL Listed
65080	White LED-Clam packaged-US Flag
65186	IR LED-Clam packaged-Olive Drab
65030	AAAA Batteries-6 Pack

STYLUS® UV

Includes an ultraviolet light for fluorescent detection of fraudulent documents and for use in forensic investigations.

LIGHT SOURCE: 365nm Ultraviolet LED.

BATTERY: 3 "AAAA" size alkaline batteries.

ON/OFF: Features momentary blink or constant on operation.

FEATURES: IPX4 Rated for water-resistant operation. Individually serialized for positive identification. Removable pocket clip. Glare guard protector.



SIZE: 6.21" x .375"
(15.17 x .95 cm)

WEIGHT: 1.1 oz (31.19 g)

COLOR: Black

OUTPUT: 3.8 mW

RUN TIME: 24h

65069 365nm UV LED-Clam packaged-Black

THE STYLUS SERIES ELIMINATES
**HARD-TO-SEE
 NOOKS AND CRANNIES
 AND LIGHTS THE WAY.**

STYLUS REACH®

Features a 7" flexible cable that enables you to see into even the tightest spots.

Twist and turn the flexible cable into any position to light the most out-of-the-way places.



LIGHT SOURCE: High-intensity white LED, with a 100,000 hour lifetime.

BATTERY: Three "AAAA" size alkaline batteries.

ON/OFF: Features a momentary blink switch and constant on.

FEATURES: IPX4 rated for water-resistant operation. Cable allows for 14" of reach. Waterproof. Individually serialized. Pocket clip. Intrinsically safe.

65618	White LED - Clam packaged - Black
65658	White LED - Clam packaged - UL Listed Black
65612	White LED - Clam packaged - Silver

SIZE: 14" x .375"
 (35.6 x .95 cm)
WEIGHT: 1.7 oz (48.2 g)
COLOR: Black or Silver

LUMENS: 11
RUN TIME: 24h



CLASSIFIED
 Intrinsic Safety for Haz. Loc.
 Class I, Div. 1,
 Groups A, B, C, D, T3C
 "Classified"

CLASSIFIED
 Intrinsic Safety for Haz. Loc.
 Class I, Div. 1,
 Groups A, B, C, D, T3C
 "Exia"

A textured grip for non-slip handling makes it easier to maneuver the light in slippery or wet conditions.



STYLUS REACH® 18

All the great features of the Stylus Reach® with an additional 11.5" of "reach." Thanks to its flexible cable, nothing is out of sight.

LIGHT SOURCE: High-intensity white LED, with a 100,000 hour lifetime.

BATTERY: Three "AAAA" size alkaline batteries.

ON/OFF: Features a momentary blink switch and constant on.

FEATURES: Cable allows for 25.5" of reach. IPX4 rated for water-resistant operation. Individually serialized. Pocket clip.

65418	White LED - 18" Cable - Clam packaged - Black
65030	AAAA Batteries - 6 Pack

SIZE: 25.5" x .375"
 (64.77 x .95 cm)
WEIGHT: 3.5 oz (99.2 g)
COLOR: Black

LUMENS: 11
CANDELA: 140
DISTANCE: 24m
RUN TIME: 24h



NON-RECHARGEABLE

HEADLAMP SERIES

// PERFORMANCE.PERIOD.

// **STREAMLIGHT TASK-SPECIFIC TECHNOLOGY:
CHOOSE THE LIGHT INTENSITY ALLOWING YOU TO
CHOOSE THE RIGHT LIGHT FOR THE JOB.**

USE THIS EASY COMPARISON CHART TO CHOOSE THE BEST LIGHT FOR YOU BASED ON THE FEATURES THAT YOU NEED!


LUMENS
CANDELA/REACH
RUN TIME
MSRP

BEAM STYLE

SPECS


HIGH MODE PERFORMANCE SHOWN.
FOR PERFORMANCE IN OTHER
MODES, SEE MODEL PAGES.

SEPTOR





OUTPUT: 120 lumens
INTENSITY: 900 candela
BEAM DISTANCE: 60 meters
RUN TIME: 3 hours 30 min
SIZE: 1.75" x 2.70" x 2.40"
(4.45 x 6.85 x 6.09 cm)
WEIGHT: 5.5 oz (156 g)
COLOR: Yellow

ARGO



OUTPUT: 150 lumens
INTENSITY: 9,250 candela
BEAM DISTANCE: 190 meters
RUN TIME: 3 hours
SIZE: 1.75" x 2.70" x 2.40"
(4.45 x 6.85 x 6.09 cm)
WEIGHT: 5.4 oz (153 g)
COLOR: Yellow

TRIDENT[®] YELLOW



OUTPUT: 80 lumens
INTENSITY: 4,000 candela
BEAM DISTANCE: 126 meters
RUN TIME: 5 hours
SIZE: 1.75" x 2.70" x 2.40"
(4.45 x 6.85 x 6.09 cm)
WEIGHT: 5.50 oz (156 g)
COLOR: Yellow

“GOING DOWN A 360FT-DEEP, PITCH-BLACK AIRSHAFT, I WASN’T ABOUT TO TAKE ANY CHANCES!”

Spec. Rescue International is a training and consulting firm that specializes in technical rescue, management and leadership, hazardous materials, terrorist event response training, expert witnessing, and systems consulting. One of Richard Alfes’ missions involved changing a bladder pump at an EPA superfund site to protect the community’s drinking water. This required a two-man team to descend a 360 foot airshaft. “I had three Streamlight LED lights on my helmet,” Richard says. “A backup light and a backup for that. The first light never failed, so I never needed either backup; and the soft, diffused LED created the perfect light for working down in that pit.”

*Richard Alfes
Vice President
Spec. Rescue International*



NON-RECHARGEABLE

HEADLAMP SERIES

// PERFORMANCE.PERIOD.

SEPTOR®

The Septor task-light headlamp now shines brighter! When you need a hands-free flood light for close-up tasks or tasks at arm's length, the Septor gives you 120 lumens of a soft, wide beam to illuminate your work area.

LIGHT SOURCE: 100,000 hour life 5mm LEDs.

LENS: Unbreakable polycarbonate lens.

BATTERY: Three "AAA" alkaline batteries.

ON/OFF: Push button switch - Sequences through (1) LED, (3) LEDs, (7) LEDs and Off.

FEATURES: Low Battery Indicator - Red LED flashes when battery voltage is low and batteries are near the end of their usable life. LED is located in the reflector in between the "Low Batt" marking and functions while the light is energized. IPX4 rated for water resistant operation. 2 meter impact resistance tested. 90° tilting head. Rubber hard hat strap.



Includes a rubber head strap that ensures a non-slip grip for hardhats.



SIZE: 1.75" x 2.70" x 2.40"
(4.45 x 6.85 x 6.09 cm)

WEIGHT: 5.5 oz (156 g)

COLOR: Yellow

	HIGH	MED	LOW
LUMENS:	120	45	13
CANDELA:	900	375	100
DISTANCE:	60m	35m	20m
RUN TIME:	3h 30m	10h	55h



Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F, G,
Class III, T5

61052 with alkaline batteries—rubber and elastic straps—Yellow

ARGO®

Featuring an intense, long-distance beam for down range illumination with 3 levels of output.

LIGHT SOURCE: C4® LED, with a 50,000 hour lifetime.

LENS: Unbreakable polycarbonate lens.

BATTERY: Three "AAA" alkaline batteries; LED battery indicator on back.

ON/OFF: Push-button sequence through modes, High, Medium, Low and Off.

FEATURES: Low Battery Indicator - Red LED flashes when battery voltage is low and batteries are near the end of their usable life. LED is located in the reflector in between the "Low Batt" marking and functions while the light is energized. IPX4 rated for water resistant operation. 2 meter impact resistance tested. 90° tilting head. Rubber hard hat strap.



Includes a rubber head strap that ensures a non-slip grip for hardhats.



SIZE: 1.75" x 2.70" x 2.40"
(4.45 x 6.85 x 6.09 cm)

WEIGHT: 5.4 oz (153 g)

COLOR: Yellow

	HIGH	MED	LOW
LUMENS:	150	100	45
CANDELA:	9,250	6,375	2,750
DISTANCE:	190m	160m	103m
RUN TIME:	3h	4h 30m	30h



Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F, G,
Class III, T5

61301 with alkaline batteries—rubber and elastic straps—Yellow

OUR MOST POPULAR HEADLAMPS ARE UPDATED WITH
**INCREASED POWER,
 PERFORMANCE,
 AND DURABILITY.**

TRIDENT®

The Trident multi-purpose headlamp now shines brighter! When you need the versatility of switching between either a bright light to illuminate objects at a distance (126 meters) or a soft flood light for tasks at arm's length.



Yellow Model	C4 LED	3 LEDS	1 LED
LUMENS:	80	35	11
CANDELA:	4,000	385	120
DISTANCE:	126m	39m	22m
RUN TIME:	5h	10h	53h

Camo Model	C4 LED	3 LEDS	1 LED
LUMENS:	80	20	6
CANDELA:	4,000	175	55
DISTANCE:	126m	26m	15m
RUN TIME:	5h	20h	63h

Green Model	C4 LED	3 LEDS	1 LED
LUMENS:	80	25	6
CANDELA:	4,000	275	55
DISTANCE:	126m	33m	15m
RUN TIME:	5h	22h	50h



Class I, Div. 2, Groups A, B, C, D;
 Class II, Div. 2, Groups F, G,
 Class III, T5

SIZE: 1.75" x 2.70" x 2.40"
 (4.45 x 6.85 x 6.09 cm)

WEIGHT: 5.50 oz (156 g)

COLOR: Yellow or Green or RealTree®
 Hardwoods® Green High Definition (HD)



90° tilting head with a new, more durable ratcheting system.



Includes a rubber head strap that ensures a non-slip grip for hard-hats.

LIGHT SOURCE: All models - One (1) White C4® LED, impervious to shock with a 50,000 hour lifetime. Yellow Model - Three (3) 5mm Ultra Bright White LEDs, impervious to shock with 100,000 hour lifetime. Camo Model - Three (3) 5mm Ultra Bright Safety Green LEDs, impervious to shock with 100,000 hr lifetime. Green Model - One (1) 5mm Ultra Bright Green LED, Two (2) 5mm Ultra Bright White LEDs, impervious to shock with 100,000 hour lifetime.

LENS: Unbreakable polycarbonate lens.

BATTERY: Three (3) "AAA" size, Alkaline (included) or Lithium batteries.

ON/OFF: Push-button sequence through modes: Yellow and Camo model - One (1) 5mm LED, Three (3) 5mm LEDs, C4 power LED, and Off. Green Model - One (1) 5mm Green LED, Two (2) 5mm White LEDs, C4 power LED, and Off.

FEATURES: Low Battery Indicator - Red LED flashes when battery voltage is low and batteries are near the end of their usable life. LED is located in the reflector in between the "Low Batt" marking and functions while the light is energized. IPX4 rated for water resistant operation. 2 meter impact resistance tested. 90° tilting head. Rubber hard hat strap.

61051	2 White and 1 Green LED with alkaline batteries - Green
61050	with White LEDs with alkaline batteries - Yellow
61070	3 Green LEDs with alkaline batteries - Camo

THREE TRIDENT MODELS:

Yellow Model: Contains C4® LED and three ultra-bright white LEDs

Green Model: Contains C4® LED one safety green LED and two white 5mm LEDs

Camo Model: RealTree® Hardwoods® Green High Definition camouflage pattern; contains super-bright C4 LED and three safety-green 5mm LEDs

NON-RECHARGEABLE

HEADLAMP SERIES

// PERFORMANCE.PERIOD.



BECAUSE THERE ARE TIMES WHEN

HANDS-FREE LIGHTING IS THE ONLY OPTION.

3AA HAZ-LO®



We engineered this compact, long-running, high-performance, C4® LED headlight to meet the stringent requirements of Division 1 hazardous locations while maintaining exceptional light output and a long run time.

LIGHT SOURCE: C4® LED, impervious to shock with a 50,000 hour lifetime.

LENS: Unbreakable polycarbonate lens. O-ring sealed.

BATTERY: Three "AA" size alkaline cells provide fast replacement with readily available batteries.

ON/OFF: Push-button switch: on/off. Rubber dome actuator provides easy operation even when wearing heavy gloves.

FEATURES: Impact-resistant housing—drop test verified. Package includes both elastic head strap and rubber hard hat strap. Intrinsically safe.



61200 with alkaline batteries—rubber and elastic straps—Yellow

LUMENS:	120	SIZE: 1.88" x 2.5" x 3.08"
CANDELA:	6,800	(4.76 x 6.35 x 7.82 cm)
DISTANCE:	165m	WEIGHT: 7.1 oz (202 g)
RUN TIME:	11h	COLOR: Yellow



Class I, II Div. 1, Groups ABCDEFG
Class III, T4A "Classified"



Class I, Div. 1, Groups A, B, C, D, T4;
Class II, Div. 1, Groups E, F, G,
Class III, T4 "Exia"



Permissible Portable Headlamp Assembly
App. No. 20-A070001-01
Tested for use in methane-air mixtures only

STREAMLIGHT HAZ-LO® SERIES: // WHAT IS "INTRINSICALLY SAFE?"



Streamlight offers a variety of lights that are safety-rated for hazardous environments. We even have several lights that are "intrinsically safe"—these are lights that have been tested to ANSI/U.L.-Std-913 and found to be safe for use in a Division 1 classified environment. Streamlight's intrinsically safe lights include:

- 3N Propolymer® LED
- 3AA HAZ-LO® LED Headlamp
- Stylus® and Stylus Reach®
- PolyStinger® LED HAZ-LO®

While an intrinsically safe light would have a Class I, Div. 1 rating, it's important to know that not every product with a Class I, Div. 1 rating is intrinsically safe.

NON-RECHARGEABLE

HEADLAMP SERIES

// PERFORMANCE.PERIOD.

ENDURO®

One of the lightest, brightest, most comfortable headlamps available today. Features high and low lighting modes, a run time up to 24 hours.

SIZE: 1.3" x 2.25" x 1.6"
(3.25 x 5.7 x 4 cm)

WEIGHT: 2.75 oz (78.5 g)

COLOR: Black or RealTree® Hardwoods® Green High Definition (HD)

BLACK MODEL WHITE LED	HIGH	LOW
LUMENS:	14.5	6
CANDELA:	850	—
RUN TIME:	6h	12h

CAMO MODEL GREEN LED	HIGH	LOW
LUMENS:	8	4
CANDELA:	162	—
RUN TIME:	9h	120h

Includes integrated rubber/elastic combination head strap and a clip that attaches to the brim of your hat, coat lapel or car visor.



LIGHT SOURCE: .5 Watt High-Flux LED, with a 30,000 hour lifetime. Camo model: Ultra-bright green LED, with a 50,000 hour lifetime.

LENS: Unbreakable polycarbonate lens.

BATTERY: Two 1.5V "AAA" cells.

ON/OFF: Push-button switch; 1st mode: Low; 2nd mode: High.

FEATURES: O-ring sealed construction—waterproof to 1 meter for one hour. Impact-resistant housing—drop test verified. High-Flux LED—Reflector Focused for 100 ft* range. Solid state power regulation provides maximum light output throughout battery life. Integral Hatclip. Packaged with batteries and "Rubber/Elastic Combo" head strap.

61400	with alkaline batteries—elastic strap and visor clip—Black
61405	with alkaline batteries—elastic strap and visor clip—Camo

BUCKMASTERS® CAMO TRIDENT®

Hands-free lighting with 90° tilting head. Features super-bright C4® LED and three safety-green LEDs within the same reflector. Three-position lighting includes C4® LED, one LED or three LEDs.

LIGHT SOURCE: All models - One (1) White C4® LED, impervious to shock with a 50,000 hour lifetime, three (3) 5mm Ultra Bright Safety Green LEDs, impervious to shock with 100,000 hr lifetime.

LENS: Unbreakable polycarbonate lens.

BATTERY: Three (3) "AAA" size, Alkaline or Lithium batteries.

ON/OFF: Push-button sequence through modes: One (1) 5mm LED, Three (3) 5mm LEDs, C4 power LED, and Off.

FEATURES: Low Battery Indicator - Red LED flashes when battery voltage is low and batteries are near the end of their usable life. LED is located in the reflector in between the "Low Batt" marking and functions while the light is energized. Tough ABS thermoplastic construction with elastomer over mold. IPX4 rated for water resistant operation. 2 meter impact resistance tested. 90 degree tilting head. Rubber Hard Hat Strap.

61070	3 Green LEDs and alkaline batteries—Camo
-------	--



// **UPDATED FOR '13**

SIZE: 1.75" x 2.70" x 2.40"
(4.45 x 6.85 x 6.09 cm)

WEIGHT: 5.50 oz (156 g)

COLOR: RealTree® Hardwoods® Green High Definition (HD)

Camo Model	C4 LED	3 LEDs	1 LED
LUMENS:	80	20	6
CANDELA:	4,000	175	55
DISTANCE:	126m	26m	15m
RUN TIME:	5h	20h	63h

STREAMLIGHT HEADLAMPS GIVE YOU THE VERSATILITY AND THE BRIGHTNESS YOU NEED TO ACCOMPLISH ANY TASK.

SIDEWINDER COMPACT®

With a 185° articulating head, and weighing just 2.4 oz with its super-light lithium battery, this versatile lighting tool can fit in the palm of your hand! You can also clip it to your MOLLE vest, belt, hat brim, headstrap or pocket.

LIGHT SOURCE: High output C4® LED, white, impervious to shock with 50,000 hour lifetime. 5mm red LED, with 100,000 hour lifetime. 5mm green LED, with 100,000 hour lifetime. 5mm blue LED, with 100,000 hour lifetime.

LENS: Unbreakable polycarbonate lens with scratch-resistant coating. Gasket-sealed.

BATTERY: One "CR123A" size lithium cell battery provides fast replacement with readily available batteries. Lithium cells allow operation in extreme temperature environments (-40°F to 150°F).

ON/OFF/INTENSITY/MODE SELECTION: Compound on/off mode selector switch ergonomically separates on/off dimming strobe and LED selection functions. Design does not require the operator to access separate switching locations on the device. Rubber dome actuator and four position pull-to-turn locking rotary selector knob provides easy operation, even when wearing heavy gloves.

FEATURES: Three meter multiple orientation impact resistance tested. Pull-to-turn locking rotary selector knob prevents accidental mode changes and allows selection of four illumination sources. Push-button switch enables/disables selected illumination source starting at high output and progressing to the lowest output in four discrete steps. Double-click of push-button initiates high output strobe of selected illumination source. Built-in battery polarity protection guards against damage to the light. Cord attachment hole provided in clip capable of supporting 25 lb of load. O-ring and gasket-sealed openings for waterproof operation. Meets MIL-STD-810F, Method 512.4. Durable belt/clothing clip with integral helmet mount features. IPX7 rated design; waterproof to 1 meter for 30 minutes.

Sportsman Model

14132 White, Red, Green, Blue LEDs. Clam. Coyote.

Accessory Name	Sidewinder Compact
CR123A lithium batteries - 2 Pack	85175
Sidewinder Compact Head Strap-Coyote	14059
Safety Wand-Glow-in-the-Dark	14902



Super-bright white C4® LED
Blue LED
Green LED
Red LED

LUMENS:	55	SIZE: 3" x 1" x 2.01" (7.62 x 2.54 x 5.11 cm)
CANDELA:	1,175	WEIGHT: 2.4 oz (68 g) 3.3 oz (93 g) with Helmet Mount
DISTANCE:	69m	COLOR: Coyote
RUN TIME:	5h 15m	



Safety Wand



Head Strap

NON-RECHARGEABLE

TWIN-TASK SERIES

// PERFORMANCE.PERIOD.



TWIN-TASK® 3C LED

The TT-3C flashlight features three lighting modes and the latest in LED technology. The two settings for the ultra-bright LEDs provide area lighting and extended run time. Choose all six or just three depending on your task. While the C4® power LED with its textured reflector provides an even beam, and a piercing hotspot for distance.

LIGHT SOURCE: C4® LED, with a 50,000 hour lifetime.
Six ultra-bright white LEDs with 100,000 hour lifetime.


LENS: Unbreakable polycarbonate lens.

BATTERY: Three "C" size alkaline batteries (not included.)

ON/OFF: Push-button sequences through three ultra-bright LEDs, six ultra-bright LEDs, C4® LED and off.

FEATURES: IPX4 rated for water-resistant operation. All openings O-ring sealed. 1 meter impact resistance tested. Wrist lanyard.

51039 Clam packaged—Matte Black

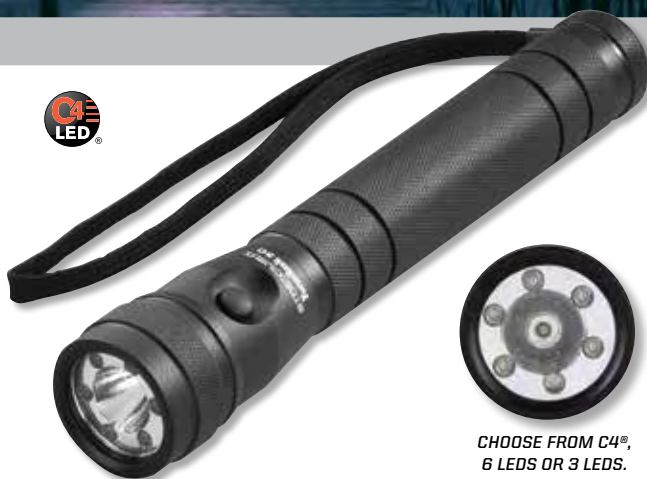

CHOOSE FROM C4®,
6 LEDs OR 3 LEDs.

SIZE: 9.02" x 1.68" x 1.26"
(22.9 x 4.26 x 3.2 cm)
WEIGHT: 1 lb (449 g)
COLOR: Matte Black

	C4 LED	6 LED	3 LED
LUMENS:	180	80	50
CANDELA:	3,550	980	612
DISTANCE:	120m	62m	50m
RUN TIME:	26h	48h	72h

TWIN-TASK® 3C-UV LED

The TT-3C-UV flashlight features three lighting modes and the latest in LED technology. The six 390nm UV LEDs provide ultraviolet light for detection of fraudulent documents, or engine and HVAC leaks. The white C4® power LED and textured reflector provides an even beam, along with a piercing hot spot for distance.

LIGHT SOURCE: C4® LED, with a 50,000 hour lifetime.
Six 390nm UV LEDs with 100,000 hour lifetime.

LENS: Unbreakable polycarbonate lens.

BATTERY: Three "C" size alkaline batteries (not included.)

ON/OFF: Push-button sequences through three 390nm UV LEDs, six 390nm UV LEDs, C4® LED and off.

FEATURES: IPX4 rated for water-resistant operation. All openings O-ring sealed. 1 meter impact resistance tested. Wrist lanyard.

51045 Clam packaged—Matte Black



CHOOSE FROM C4®,
6 UV LEDs OR 3 UV LEDs.

SIZE: 9.02" x 1.68" x 1.26"
(22.9 x 4.26 x 3.2 cm)
WEIGHT: 1 lb (449 g)
COLOR: Matte Black

	C4 LED	6 UV LED	3 UV LED
LUMENS:	185	44mw	30mw
CANDELA:	3,730	n/a	n/a
DISTANCE:	116m	n/a	n/a
RUN TIME:	27h	63h	81h

“TWIN-TASK 3AA: THE LIGHT THAT NEVER FAILS!”

Dear Streamlight, After three years of using your Twin-Task 3AA I had to write and tell you how pleased I am. I work in industrial maintenance, which requires me to repair heavy, dirty equipment in low light and dangerous conditions. I have tried all the other name brands and much more expensive lights that failed in one way or the other, but your light has not failed me one time.

It has been dropped from 30+ feet out of a lift, submerged in coolant and 90 degree oil. After an airline break it was slung across the floor into a concrete wall. And most recently, it was dropped into a grinding tank where it stayed for four days. When it was retrieved, the light was still burning strong. Other than a few dings and scratches it is still my most valuable tool. Should it ever stop working I will buy another.

Thank You, Kyle Rhodes

TWIN-TASK® 3AA LED

This versatile, long-running, go-anywhere light cuts through the dark with extreme brightness. It features dual lighting modes: a C4® LED that provides a bright, even beam with a piercing hotspot for distance, and three ultra-bright LEDs for area lighting and a longer run time.

LIGHT SOURCE: C4® LED, with a 50,000 hour lifetime. Three ultra-bright white LEDs with 100,000 hour lifetime.

LENS: Unbreakable polycarbonate lens.

BATTERY: Three “AA” size alkaline batteries.

ON/OFF: Push-button sequences through C4® LED, three ultra-bright LEDs, C4® LED and off.

FEATURES: IPX4 rated for water-resistant operation. All openings O-ring sealed. 1 meter impact resistance tested. Wrist lanyard.

51038 with alkaline batteries – Clam packaged – Matte Black



CHOOSE FROM C4®, OR 3 LEDs.

SIZE: 8.54" x 1.33" x .79"
(21.7 x 3.38 x 2.0 cm)
WEIGHT: 6.91 oz (196 g)
COLOR: Matte Black

	C4 LED	3 LED
LUMENS:	100	33
CANDELA:	2,283	467
DISTANCE:	96m	43m
RUN TIME:	5h 45m	34h

TWIN-TASK® 3AAA LASER LED

The TT-3AAA flashlight features a laser pointer and the latest in LED technology. The C4® power LED with its textured reflector provides an even beam, along with piercing hotspot for distance. Five ultra-bright LEDs provide area lighting and extended run time.

LIGHT SOURCE: C4® LED, with a 50,000 hour lifetime. Five ultra-bright white LEDs with 100,000 hour lifetime. Pre-focused visible red Laser cartridge.

LENS: Unbreakable glass lens.

BATTERY: Three “AAA” size alkaline batteries.

ON/OFF: Push-button sequences through: laser only; C4® LED; laser/C4® LED combo; five ultra-bright white LEDs; and off.

LASER OUTPUT: Usable range of 100 yards+ when using laser pointer only. 100 feet+ when in laser/C4® LED combo position.

FEATURES: IPX4 rated for water-resistant operation. All openings O-ring sealed. 1 meter impact resistance tested. Wrist lanyard.

51043 with alkaline batteries – Clam packaged – Matte Black



CHOOSE FROM C4®, 5 LEDs OR LASER.

SIZE: 5.38" x 1.57" x 1.17"
(13.69 x 3.98 x 2.98 cm)
WEIGHT: 7.04 oz (200 g)
COLOR: Matte Black

	C4 LED	5 LED
LUMENS:	100	68
CANDELA:	2,000	800
DISTANCE:	90m	57m
RUN TIME:	2h 45m	5h 15m

NON-RECHARGEABLE

TWIN-TASK SERIES

// PERFORMANCE.PERIOD.



TASK-LIGHT® 3AA LED

The long life of an LED with the longer range and brighter beam of a conventional high-powered flashlight.

LIGHT SOURCE: C4® LED, with a 50,000 hour lifetime.

LENS: Unbreakable polycarbonate lens.

BATTERY: Three "AA" size alkaline batteries.

ON/OFF: Push-button headswitch.

FEATURES: Textured parabolic reflector produces an even, wide beam hotspot; O-ring sealed; water-resistant; and heavy-duty drop-tested construction.

51006 with alkaline batteries – Clam packaged – Matte Black

51016 with alkaline batteries – Clam packaged – Titanium



SIZE: 8.60" x 1.33" x .79"
(21.7 x 3.38 x 2.01 cm)

WEIGHT: 6.4 oz (180 g)

COLOR: Matte Black or Titanium

LUMENS: 95

CANDELA: 1,600

RUN TIME: 16h

THEY'RE CALLED TWIN-TASK[®],

**BUT THESE LIGHTS
ARE SO VERSATILE,**

THEY SHOULD
BE CALLED...

ANY-TASK.

TWIN-TASK[®] 1L LED

This lightweight lithium battery-powered flashlight features dual lighting modes: A C4[®] LED that provides a bright, even beam with a piercing hotspot for distance, and three ultra-bright LEDs for area lighting and longer run time.

LIGHT SOURCE: C4[®] LED, with a 50,000 hour lifetime.
Three ultra-bright white LEDs with 100,000 hour lifetime.

LENS: Unbreakable polycarbonate lens.

BATTERY: One 3 Volt "CR123A" lithium battery.

ON/OFF: Push-button sequences through C4[®] LED, three ultra-bright LEDs, C4[®] LED and off.

FEATURES: IPX4 rated for water-resistant operation. All openings O-ring sealed. 1 meter impact resistance tested. Wrist lanyard.

51036 with lithium battery – Clam packaged – Matte Black



CHOOSE FROM C4[®],
OR 3 LEDS.

SIZE: 4.09" x 1.33" x .98"
(10.39 x 3.38 x 2.49 cm)
WEIGHT: 4.1 oz (115 g)
COLOR: Matte Black

	C4 LED	LED
LUMENS:	96	20
CANDELA:	2,117	200
DISTANCE:	92m	28m
RUN TIME:	2h 15m	13h

TWIN-TASK[®] 2L LED

The same great features as the Twin-Task 1L LED with added brightness, run time and reach.

LIGHT SOURCE: C4[®] LED, with a 50,000 hour lifetime.
Three ultra-bright white LEDs with 100,000 hour lifetime.

LENS: Unbreakable polycarbonate lens.

BATTERY: Two 3 Volt "CR123A" lithium batteries.

ON/OFF: Push-button sequences through C4[®] LED, three ultra-bright LEDs, C4[®] LED and off.

FEATURES: IPX4 rated for water-resistant operation. All openings O-ring sealed. 1 meter impact resistance tested. Wrist lanyard.

51037 with lithium batteries – Clam packaged – Matte Black



CHOOSE FROM C4[®],
OR 3 LEDS.

SIZE: 5.43" x 1.33" x .98"
(13.79 x 3.38 x 2.49 cm)
WEIGHT: 5.44 oz (152 g)
COLOR: Matte Black

	C4 LED	LED
LUMENS:	120	31
CANDELA:	2,483	375
DISTANCE:	100m	39m
RUN TIME:	4h	15h

NON-RECHARGEABLE

SPECIALTY SERIES

// PERFORMANCE.PERIOD.



NIGHT COM® LED



Three Modes:



1 LED
Run Time
130 hours



2 LEDs
Run Time
28 hours



C4®
Run Time
3.5 hours



The lithium powered light combines C4® LED Technology and MIL STD LED Night Vision protection. Streamlight's mode-select switch allows the user to choose from (3) Lighting options: C4® LED, night vision protection LED that meets or exceeds the requirements of MIL-1472D or a setting that gives the user (2) Ultra-Bright red LEDs for use when true night vision preservation is not necessary.

51056 with lithium batteries—Clam packaged—Red LEDs

	C4 LED	LED	SIZE: 5.40" x 1.33" x .98" (13.7 x 3.38 x 2.49 cm)
LUMENS:	105	2.5	WEIGHT: 5.44 oz (152 g)
CANDELA:	4,500	—	COLOR: Matte Black
RUN TIME:	3h 30m	28h	

LED - Indicator Type: Preserves complete dark adaptation per MIL-1472D (<0.05 lumens)

NIGHT COM® UV

Two lighting tools in one convenient package. Choose between far-reaching, bright, white light or ultraviolet light for detection of fraudulent documents, or detecting engine and HVAC leaks.

51046 with lithium batteries—Clam packaged

SIZE: 5.40" x 1.33" x .98"
(13.7 x 3.38 x 2.49 cm)
WEIGHT: 5.44 oz (152 g)
COLOR: Matte Black

	HIGH C4 LED	LOW C4 LED
LUMENS:	115	50
CANDELA:	4,200	1,600
DISTANCE:	130m	80m
RUN TIME:	4h 15m	13h 30m

UV LEDs: 10 Hours of continuous run time



Two Modes:



C4®
50,000 hour
lifetime



6 LEDs
(3) 365nm UV LEDs
(3) 390nm UV LEDs

MULTI OPS®



It's an ultra-bright C4® LED, a UV light for fluid detection and a laser pointer all in one. The advanced switch lets you choose any function without cycling through different modes. With this powerful, multi-task light, you're ready for almost anything!

51072 with alkaline batteries—Black

SIZE: 5.38" x 1.57" x 1.17"
(13.69 x 3.98 x 2.98 cm)
WEIGHT: 7.04 oz (200 g)
COLOR: Matte Black

LASER OUTPUT: Useable laser range of 100+ feet when in LED/laser mode, and 100+ yards when in laser only mode.

	C4 LED
LUMENS:	50
CANDELA:	2,500
DISTANCE:	100m
RUN TIME:	2h 45m

SPECIALIZED TECHNOLOGY FOR SPECIALIZED JOBS.

STREAMLIGHT JR.® LED



Cutting-edge C4® LED technology and internal reflection optics make this ultra-compact light super-bright and ultra-convenient.

LIGHT SOURCE: C4® LED, with a 50,000 hour lifetime.

LENS: Unbreakable polycarbonate lens.

BATTERY: Two "AA" size, alkaline or lithium batteries.

ON/OFF: Push-button tailswitch—momentary or constant on operation.

FEATURES: IPX4 rated for water-resistant operation. All openings O-ring sealed. One meter impact resistance tested. Solid state circuitry provides regulated light output throughout battery life. Removable pocket clip.



SIZE: 6.5" x 1" x .73"
(16.51 x 2.54 x 1.85 cm)
WEIGHT: 4.1 oz (117 g)
COLOR: Black

LUMENS:	85
CANDELA:	3,800
DISTANCE:	123m
RUN TIME:	4h

71500	with alkaline batteries—Black
71503	Nylon Holster
71510	Magnetic Clip Holder
99075	Rubber Helmet Strap



STREAMLIGHT JR.® REACH LED



With the ultra-bright, long-beam, C4® LED mounted on a flexible cable and the magnetic clip for easy mounting, you can put this handy light almost anywhere and see anything.

LIGHT SOURCE: C4® LED, with a 50,000 hour lifetime.

LENS: Unbreakable polycarbonate lens.

BATTERY: Two "AA" alkaline batteries

ON/OFF: Push-button tailswitch—momentary or constant on operation.

FEATURES: Internal reflection optics; O-ring sealed; IPX4 rated for water-resistant operation. One meter impact resistance tested. Includes magnetic clip holder.



71600	with alkaline batteries—Black
71503	Nylon Holster
71510	Magnetic Clip Holder
99075	Rubber Helmet Strap

SIZE: 20" x .8" x .73"
(50.8 x 2.03 x 1.85 cm)
WEIGHT: 6.1 oz (173 g)
COLOR: Black

LUMENS:	85
CANDELA:	1,600
DISTANCE:	80m
RUN TIME:	3h 15m



NON-RECHARGEABLE

POCKET LIGHT SERIES

// PERFORMANCE.PERIOD.



CLIPMATE® USB

This multi-function light clips to pocket or cap for hands-free use. Recharges by plugging into USB port or optional AC wall adapter.

FEATURES: C4® LED technology for extreme brightness. IPX4 rated for water resistant operation. All openings sealed. 1 meter impact resistance tested. USB rechargeable via the tethered USB cover.

61126	Holster, 120V AC wall adapter, USB cord - Black
61125	Holster, USB cord - Black

	WHITE HIGH	WHITE LOW	RED HIGH	RED LOW
LUMENS:	70	10	.5	.2
CANDELA:	500	50	9	3
DISTANCE:	44m	14m	6	3m
RUN TIME:	3h 30m	24h	16h	65h

Flexible, extension cable targets the beam where you need it

Dual LEDs: High-intensity white LED, Night vision red LED

SIZE: 3.20" x 1.39" x .65"
(8.1 x 3.5 x 1.7 cm)
WEIGHT: 1.9 oz (53.8 g)
COLOR: Black



NEW FOR '14



THE LOGO™



SIZE: 1.8" x 1.2" x .37"
(45.7 x 30.5 x 9.4 mm)
WEIGHT: .37 oz (10.7 g)
COLOR: Black

LUMENS: (high)	10
LUMENS: (medium)	5
LUMENS: (low)	2.5
RUN TIME:	45h (blink mode)

This little keychain light weighs less than half an ounce with batteries. And you won't believe all it can do or how smart it is! It has three light levels, plus a blink mode (which will flash for 45 hours). And, to conserve battery life in High, Medium or Low modes, it automatically turns itself off after 6 minutes; but it flashes a warning first, so you can keep it turned on if you want. Smart!

73100	White LED - Clam packaged - Black
-------	-----------------------------------

KEY-MATE®

One of the most durable keychain lights. Features machined aluminum construction and one LED. The Key-Mate runs longer and stays brighter.

72001	Black with White LED and batteries - Clam packaged
72101	Titanium with White LED and batteries - Clam packaged
72003	Black with Green LED and batteries - Clam packaged
72203	Camo with Green LED and batteries - Clam packaged
72016	Filter Combo - Black w/ White LED, Red & Green Filters, lanyard.
72030	4 pack Key-Mate Batteries
72025	Key-Mate Filter - Red
72026	Key-Mate Filter - Green
72027	Key-Mate Filter - Blue
72028	Key-Mate Filter - IR



Colored & Infrared Lenses



Batteries

LUMENS: white led	10
LUMENS: green led	2.6
RUN TIME:	96h

SIZE: 2.36" x .74" x .57"
(5.9 x 1.88 x 1.45 cm)
WEIGHT: .9 oz (25.4 g)

COLOR: Black with white or green LED, Titanium with white LED and RealTree® Hardwoods® High Definition® (HD) Green with green LED

NANO LIGHT®

Truly tiny, the Nano Light is a weatherproof, personal flashlight featuring a 100,000 hour life LED. Includes a non-rotating snap hook for easy one-handed operation when attached to a keychain.



LIGHT SOURCE: 5mm white LED

SIZE: 1.47" x .51" x .43"
(3.73 x 1.3 x 1.09 cm)

WEIGHT: .36 oz (10 g)

COLOR: Black, Blue, Pink, Red, Orange or Coyote

LUMENS: 10

RUN TIME: 8h

73002	COPS/Blue with White LED—Clam packaged
73003	BCRF/Pink with White LED—Clam packaged
73005	NFFF/Red with White LED—Clam packaged
73006	BADF/Orange with White LED—Clam packaged
73007	TMF/Coyote with White LED—Clam packaged
73008	ADA/Red with White LED—Clam packaged
61205	4 pack coin cell Nano Light Batteries

LIGHTS FOR A CAUSE:

For every custom Nano Light® sold, Streamlight will donate \$1 to their respective organization.

STREAMLIGHT CARES:

THE PRODUCT THAT ALLOWS YOU TO **SUPPORT CAUSES THAT MATTER.**



By purchasing this product you are helping to make a difference in the rebuilding of the lives of surviving families and affected co-workers of law enforcement officers killed in the line of duty. In addition to rebuilding lives, C.O.P.S. provides training to law enforcement agencies on survivor victimization issues and educates the public of the need to support the law enforcement profession and its survivors. For more information, visit www.nationalcops.org.



The Breast Cancer Research Foundation® is an independent 501 (c) (3) not-for-profit organization whose mission is to achieve prevention and a cure for breast cancer in our lifetime by providing critical funding for innovative clinical and genetic research at leading medical centers worldwide, and increasing public awareness about good breast health. For more information, visit www.bcrf.org.



Congress created the National Fallen Firefighters Foundation to lead a nationwide effort to honor America's fallen firefighters. Since 1992, the non-profit foundation has developed and expanded programs that fulfill that mandate. Their mission is to honor and remember America's fallen fire heroes and to provide resources to assist their survivors in rebuilding their lives. For more information, visit www.firehero.org.



The Buckmasters American Deer Foundation, (BADF), founded by Jackie Bushman was born from the desire to give back to the hunting community, starting with programs such as Project Venison and Hunters of Tomorrow. Buckmasters Chapters from across the country continue to give to those in need. For more information, visit www.buckmasters.com/resources/badf.aspx.



The Travis Manion Foundation honors and assists our nation's veterans, first responders, and the families of fallen heroes through various grants, scholarships, races, and The annual 9/11 Heroes Run. For more information, visit www.travismanion.org.



By purchasing this product, you are helping to make a difference in lives of those affected by diabetes. The mission of The American Diabetes Association Research Foundation is to prevent and cure diabetes and improve the lives of all people affected by diabetes. To learn more, please visit www.diabetes.org.

LIGHTS FOR A CAUSE:

For every pink Strion® LED sold, Streamlight will donate \$5 to the Breast Cancer Research Foundation.* See the full Strion LED specs on pg. 17.



STRION® LED

STRION LED

SIZE: 5.9" x 1.25" x .95"
(14.99 x 3.18 x 2.41 cm)

WEIGHT: 5.2 oz (148 g)

COLOR: Pink

	HIGH	MEDIUM	LOW
LUMENS:	260	130	65
CANDELA:	10,000	5,000	2,500
DISTANCE:	200m	141m	100m
RUN TIME:	2h	4h	7h 30m

74350 with AC/12V DC-1 Holder—Pink

LIGHTS FOR A CAUSE:

For every pink ProTac® HL sold, Streamlight will donate \$3 to the Breast Cancer Research Foundation.* See the full PROTAC HL specs on pg. 59.



PROTAC® HL

PROTAC HL

SIZE: 5.4" x 1.375" x 1.0"
(13.72 x 3.49 x 2.54 cm)

WEIGHT: 5.6 oz (158 g)

COLOR: Pink

	HIGH	LOW
LUMENS:	600	33
CANDELA:	16,000	800
DISTANCE:	253m	57m
RUN TIME:	1h 15m	18h

88044 w/lithium batteries and holster—Pink

LIGHTS FOR A CAUSE:

For every red Vantage® sold, Streamlight will donate \$3 to the National Fallen Firefighters Foundation.* See the full Vantage specs on pg. 33.



VANTAGE®

VANTAGE

SIZE: 3.26" x 1.47" x 2.56"
(8.28 x 3.73 x 6.5 cm)

WEIGHT: 5.14 oz (145.7 g)

COLOR: Black

LUMENS:	115
CANDELA:	7,000
DISTANCE:	167m
RUN TIME:	6h

69157 Vantage LED Tactical Helmet Light—Red

NFPA Meets requirements of NFPA 1971-8.6 (2007); 500° heat resistance test
CE Meets applicable European Community Directives



STREAMLIGHT® Anniversary 1973-2013

Streamlight, Inc.
30 Eagleville Road
Eagleville, PA U.S.A 19403-3996

www.streamlight.com // www.streamlightgear.com
(800) 523-7488 Toll-Free
(800) 220-7007 Fax
(610) 631-0600
(610) 631-0712 Fax

